

## A review of MEMS micropropulsion technologies for CubeSats and PocketQubes

Silva, Marsil A.C.; Guerrieri, Daduí C.; Cervone, Angelo; Gill, Eberhard

**DOI**

[10.1016/j.actaastro.2017.11.049](https://doi.org/10.1016/j.actaastro.2017.11.049)

**Publication date**

2018

**Document Version**

Accepted author manuscript

**Published in**

Acta Astronautica

**Citation (APA)**

Silva, M. A. C., Guerrieri, D. C., Cervone, A., & Gill, E. (2018). A review of MEMS micropropulsion technologies for CubeSats and PocketQubes. *Acta Astronautica*, 143, 234-243.  
<https://doi.org/10.1016/j.actaastro.2017.11.049>

**Important note**

To cite this publication, please use the final published version (if applicable).  
Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.  
We will remove access to the work immediately and investigate your claim.

# A Review of MEMS Micropropulsion Technologies for CubeSats and PocketQubes

Marsil A. C. Silva <sup>1\*</sup>, Daduí C. Guerrieri <sup>1</sup>, Angelo Cervone <sup>1</sup>, Eberhard Gill <sup>1</sup>

<sup>1</sup>Space Systems Engineering, Faculty of Aerospace Engineering, TU Delft

Kluyverweg 1, 2629 HS Delft, The Netherlands

\* [m.deAthaydeCostaeSilva@tudelft.nl](mailto:m.deAthaydeCostaeSilva@tudelft.nl)

**Abstract:** CubeSats have been extensively used in the past decade as scientific tools, technology demonstrators and for education. Recently, PocketQubes have emerged as an interesting and even smaller alternative to CubeSats. However, both satellite types often lack some key capabilities, such as micropropulsion, in order to further extend the range of applications of these small satellites. This paper reviews the current development status of micropropulsion systems fabricated with MEMS (micro electro-mechanical systems) and silicon technology intended to be used in CubeSat or PocketQube missions and compares different technologies with respect to performance parameters such as thrust, specific impulse, and power as well as in terms of operational complexity. More than 30 different devices are analyzed and divided into 7 main categories according to the working principle. A specific outcome of the research is the identification of the current status of MEMS technologies for micropropulsion including key opportunities and challenges.

**Keywords:** micropropulsion; MEMS; CubeSat; PocketQube;

## 1 **1 Introduction**

2 Micropropulsion systems are important to improve small satellites' capabilities since some  
3 missions require station keeping, de-orbiting, formation flying, and orbit transfer. Miniaturization  
4 and integration are basic characteristics that these devices need in order to provide thrust in the  
5 levels of micronewtons up to a few millinewtons with stringent constraints of mass, volume, and  
6 power [1]. These propulsion systems are part of a general trend in space research towards  
7 miniaturization therefore they can be extended to other classes of spacecraft. For artificial satellites,  
8 the mass is usually used to define the level of miniaturization. The categories of miniaturized  
9 satellites used in this publication are nano-satellites with masses ranging from 1 to 10 kg, and  
10 pico-satellites from 0.1 to 1 kg.

11 The popularity of nano- and pico-satellites has increased in the last decades as these spacecraft  
12 have allowed a transition from technology demonstrators and educational tools to industrial scale  
13 with some companies starting to make business with those satellites especially for Earth  
14 observation [2],[3], [4]. In this context, two standards have become more and more attractive:  
15 CubeSats and PocketQubes [5]. In these standards, a satellite is composed of one or more modular  
16 units, which, in the case of a CubeSat, is a cube of  $10\times 10\times 10$  cm denoted 1U CubeSat. Therefore,  
17 a 3U CubeSat is a satellite composed by three of these modules with a form factor of  
18  $30\times 10\times 10$  cm [6]. For a PocketQube, a unit is a cube of  $5\times 5\times 5$  cm.

19 Developing standard subsystems for those satellites is a clear niche for scientists and companies.  
20 However, there is still a significant gap between current technology and the theoretical limits [6].  
21 One of the subsystems which have gained increasing attention is micropropulsion. Several  
22 researchers have been working on different concepts to meet the maneuvering requirements. This  
23 paper reviews the current status of development of micropropulsion systems that are suitable for

1 CubeSats and PocketQubes. Similar efforts have been made in the past, for example [7], [8] but  
2 none specifically analyzing devices designed for those kinds of satellites.

3 This paper reviews the recent development on the micropropulsion systems that can be  
4 manufactured using MEMS (micro electro-mechanical systems) technologies since it is key  
5 towards miniaturization, although other promising alternatives are also available, such as solar sail  
6 systems [9–11]. Only a few CubeSats have been launched to demonstrate the use of this technology  
7 [12]. Most of the micropropulsion systems analyzed here are under development and only cold-gas  
8 systems (among MEMS devices) have already flown in CubeSats, for example [6], [13–15] and  
9 there is sufficient flight heritage and information. For most of the concepts, there is still a long way  
10 towards a design of a system that is suitable for launching. Several reviews have been published in  
11 the last decade regarding propulsion systems for small spacecraft including CubeSats but with  
12 limited analysis on MEMS technologies and their applications to pico-satellites (such as  
13 PocketQubes) [8], [16–22].

14 Requirements for the propulsion system in CubeSats and PocketQubes concern mainly  
15 mechanical and electrical constraints as the development of this system is still in an early stage with  
16 few successfully in-flight operated devices. The CanX-2 [15] was the first CubeSat to use a  
17 propulsion system in space, specifically a cold-gas thruster, and it could achieve a maximum thrust  
18 of 35 mN and average specific impulse of 46.7 s intended to be used in formation flying  
19 missions. The minimum impulse bit was ranging from 0.07 mNs to 0.15 mNs. In that case, the  
20 velocity increment requirement, termed as  $\Delta v$ , was set to 2 m/s because of mass and size  
21 constraints. In [23] it is suggested an estimation of the required velocity increment of 12.4 m/s for  
22 a formation flying mission. This would require a thruster with a specific impulse around 90 s for a  
23 3U CubeSat.

1 The remainder of the paper is organized as follows: in section 2, the devices based on MEMS  
2 technology are presented. Section 3 compares and discusses the different types of micropropulsion  
3 systems with a focus on performance parameters such as thrust, specific impulse and power, and the  
4 conclusions are drawn in section 4.

5

## 6 **2 MEMS micropropulsion**

### 7 **2.1 Resistojets**

8 The working principle of this type of micropropulsion is based on heating the gaseous propellant  
9 with a resistance and then accelerating and expelling it to space. Some devices use propellants  
10 stored in liquid or solid phase, therefore phase-change accompanies the heating of the gas. The  
11 phase-change is done by heating a resistance in contact with a part or all the propellant that is kept  
12 in certain conditions of pressure and temperature to allow the specific process (sublimation or  
13 vaporization) to occur.

14 Considering the type of phase-change within the devices we can identify two main types of  
15 micro-resistojets which also differ regarding the governing flow regime: vaporizing liquid  
16 micro-thruster – VLM and low-pressure micro-resistojet – LPM (also known as Free Molecule  
17 Micro-Resistojet). The VLM accelerates the vaporized gas by means of adiabatic expansion in a  
18 convergent-divergent nozzle. In this case the flow can be modeled in the continuum flow range  
19 (Knudsen number  $Kn \leq 0.1$ ) although some authors [24] suggest that a statistical method such as  
20 DSMC (Direct Simulation Monte-Carlo) is better than the usual approach using Navier-Stokes  
21 equations for the flow in the nozzle exit because the Knudsen number in that region is high. Thus,  
22 for simulations, a combination of methods is apparently the most suitable approach to help and  
23 guide the design. The LPM works in a very low range of pressure and high Knudsen number (  
24  $0.1 < Kn \leq 10$ ) in which the flow has to be modeled in the transitional flow regime. Usually, these

1 devices use nitrogen as the propellant to evaluate the performance of the nozzle and water to prove  
2 the concept in terms of vaporization or even as the actual propellant [25].

3

#### 4 **2.1.1 Vaporizing Liquid Micro-thruster – VLM**


5 This is one the most frequently found micro-resistojet generally manufactured using MEMS  
6 technologies in silicon or ceramic wafers. It consists of an inlet channel through which the  
7 propellant is fed, a chamber where the propellant is vaporized by a heating element, and a  
8 convergent-divergent nozzle to accelerate the gasses to supersonic velocities. Most of the work  
9 concerning this device has been focused on the numerical analysis of flow in micro-nozzles and in  
10 the design of the chamber that contains the heating element [26], [27]. However, the boiling process  
11 in the chamber is a complex and important factor to be analyzed in order to optimize the design of  
12 the chamber thus improving performance [28–30].

13 The geometry and material of the heating element are one of the key features towards  
14 performance improvement since this is where most of the energy is converted and is usually a  
15 low-efficiency process [26], [27], [31], [32]. Most of the devices are tested with water due to its  
16 safety of handling and ease of acquiring but it can also be used as the actual propellant as it can be  
17 stored as a liquid with the conditions of temperature and pressure considered for CubeSats and  
18 PocketQubes [33]. The main drawback of water as a propellant is its high heat of vaporization that  
19 represents high power consumption to operate the thruster, however water has the best  $\Delta v$  (change  
20 in velocity) per volume of propellant and specific impulse when compared to other substances that  
21 are suitable for CubeSats and PocketQubes [33].

22 There are two different designs that arise from differences in the manufacturing process chosen  
23 (Figure 1). The etching process can be tuned together with the type of wafer to create cavities with  
24 walls inclined around  $54.7^\circ$  which are used to create the nozzle perpendicular (out-of-plane) to the

1 plane of the wafer [32], [34–36]. This might simplify the manufacturing but it reduces the freedom  
2 of the design and perhaps degrading performance. Another option is to use a more elaborated  
3 etching step that uses the Bosch process in order to create out-of-plane nozzles with more complex  
4 shapes [37].

5

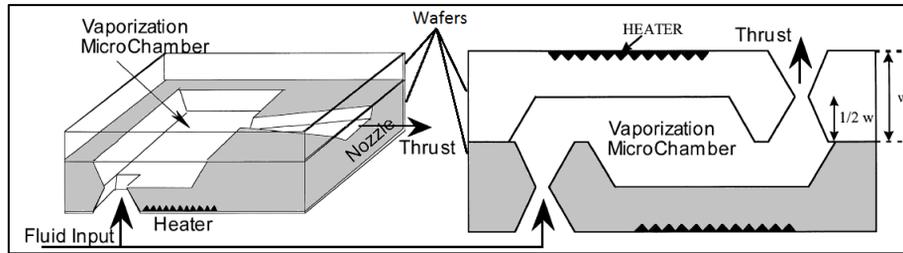

6

7 Figure 1 – Comparison between two different designs (figure adapted from [32]): in-plane thrust  
8 design (left) and out-of-plane thrust design (right).

9

10 In the in-plane design, the shape of the nozzle (and the chamber) is etched on the surface of the  
11 wafer to create a pseudo-two-dimensional feature [32], [38–40]. The freedom in the design in this  
12 case, in contrast to the out-of-plane design, is a little bit better while the simplicity in the  
13 manufacturing may be lost depending on the types of features one wants to fabricate.


14 Concerning the material used for fabrication and the process itself, silicon is the main choice but  
15 low temperature co-fired ceramic (LTCC) is an interesting choice for being simpler to manufacture  
16 and cheaper [41], [42].

17 Current devices are able to deliver thrust in the range from around  $1 \mu\text{N}$  to around  $7 \text{mN}$   
18 while consuming from 1 to  $10 \text{W}$  which might be high depending on the type mission in  
19 consideration.

20

## 1 2.1.2 Low-Pressure Micro-Resistojet – LPM

2 The low-pressure micro-resistojet, also known as Free Molecule Micro Resistojet (FMMR),  
3 works in the transitional flow regime due to the low pressure, i.e.  $0.1 < Kn \leq 10$ . Therefore,  
4 statistical methods based on the gas kinetic theory have to be used to model and simulate the  
5 operation of this microthruster [43], [44]. The devices, see Figure 2, are usually composed of an  
6 inlet section, a plenum where the gas is injected with low pressure typically below 1000 Pa, and a  
7 heater chip with slots or microchannels through which the gas is accelerated to space. The heater  
8 chip, usually fabricated with MEMS manufacturing, contains a resistance to increase the  
9 temperature of the channels thus the energy of the particles in contact with the walls. Therefore, the  
10 geometry of the channels is a very important point to consider in the design in order to enhance the  
11 efficiency of the heat transfer to the gas and the overall efficiency of the thruster [45], [46]. The  
12 type of resistance and the manufacturing approach is also important to ensure an optimal  
13 conversion of electrical to thermal energy.

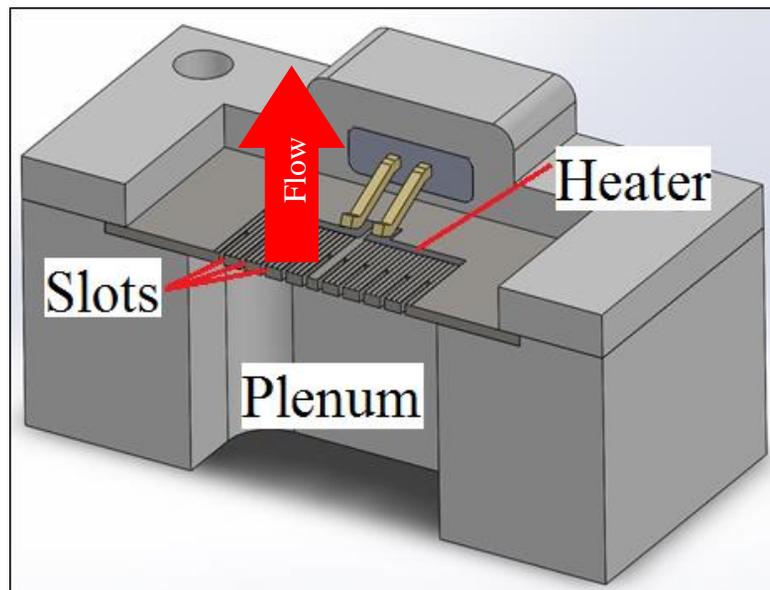

14  
15 Figure 2 – Cross section of a LPM indicating the parts of the thruster; the flow goes in the direction  
16 indicated by the red arrow.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24

Although this propulsion concept has been investigated numerically and experimentally it still needs to overcome some issues in the design such as propellant choice and storage. The level of pressure needed in the plenum, in particular, poses a challenge for the design of the valve and the tank for example.

In general, these devices are simulated or tested with inert gasses, such as helium or nitrogen, or water but other propellants might be also considered [25], [43], [47], [48].

An interesting advantage of this type of micropropulsion system is the scalability of the design which can be extended or shrunk by changing the number of channels in the heater chip. Each channel provides a certain amount of thrust so that the total thrust can be adjusted in the design for the particular mission by choosing the correct number of channels for the desired levels of thrust.


**2.2 Cold-gas micro-thrusters – CG**

This type of micropropulsion system uses a pressurized gas as the propellant stored either in liquid, gaseous, or solid phase. The gas passes through a nozzle and it is accelerated to high velocities producing thrust. In general, the leakage levels of cold gas systems is the main challenge to overcome since the contamination with microscopic particles poses a threat to the sealing of valves, for example, which has to be taken into account when designing the system and estimating its performance. Depending on how long the satellite is stored waiting for launch (which in the case of CubeSats might be very long) leaks might consume much of its propellant if not treated with caution. The leak rate in the system presented in [49], for example, is below  $10^{-5}$  ssc/s which is acceptable for that system.

These systems are at an advanced level of development for CubeSats as they are simple to build and operate. Some of them, e.g. the one shown in Figure 3, have already integrated control circuits

1 to interface with the satellite bus and all fitting in 1U or less [49–53]. Integrated sensors and control  
2 valves might be the next milestone for these engines.

3 Some differences arise in the propellant storing scheme that can be stored in the gaseous phase,  
4 liquid phase, or solid phase. The latter usually ignites a propellant pellet to generate a certain  
5 amount of gas in the plenum or tank; just as with solid propellant engines, the control and efficiency  
6 of the ignition are crucial for the performance of the thruster. Inert gasses are a common choice due  
7 to safety concerns but other options, such as butane or other gasses with low boiling points, might  
8 be interesting since efficiency might improve when using liquid propellant.

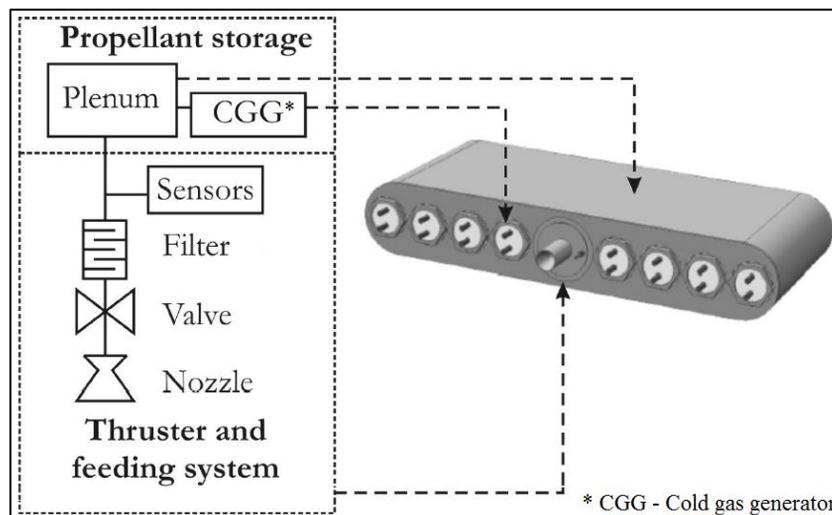


9  
10 Figure 3 – Example of cold-gas thruster (adapted from [51]) designed for the Delfi-N3xt mission.

11  
12 **2.3 Solid propellant – SP**

13 Solid propellant micro-thrusters consist of a chamber containing a small amount of propellant,  
14 an igniter (usually a heater), and a nozzle to accelerate the gasses after combustion (Figure 4).  
15 These devices are among the most compact ones since there is no need of a feeding system or a  
16 pressurized container. Also, a good advantage brought by the compactness is the possibility to put  
17 many engines in a single chip as in [54], [55–57], [58] and [59], [60], for example.

1 The main concerns in the development are in the design of the igniter and the chamber to assure  
2 an optimal combustion of the propellant in order to avoid the exhaust of unburned propellant grains  
3 [61–63]. The disadvantages of these devices are the lack of control after ignition and that they are  
4 not able to restart. For repetitive ignitions, several stages would have to be used which increases the  
5 system complexity.

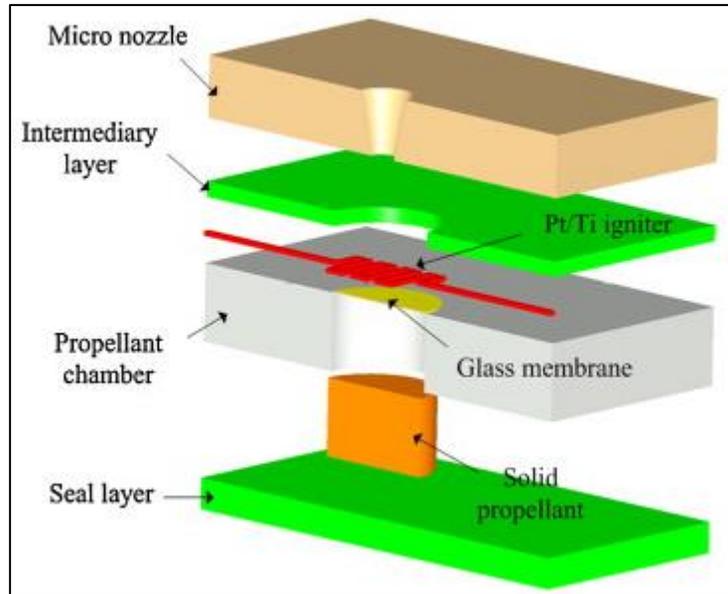

6  
7 Figure 4 – Example of a solid propellant micro-thruster (adapted from [60]).

8  
9 The efficiency of the combustion might be limited by the placement of the igniter which can be  
10 either on top or on the bottom of the propellant grain [55], [64–66]. The placement of the propellant  
11 grain might be also a challenge depending on the size of the igniter and amount of propellant since  
12 they can be on the micrometer scale. These facts are determinant since the efficiency of this type of  
13 micropropulsion system can be as low as 10% [54] and the repeatability in terms of thrust is  
14 degraded by these circumstances and is very important for precision applications [67], [68].


15

## 1   **2.4 Liquid propellant – LP**

2       This category comprises the MEMS micro-propulsion systems which uses some liquid as a  
3   propellant that when catalyzed decomposes into hot gasses. The gasses are then accelerated through  
4   a nozzle to generate thrust. Common propellant choices for these systems are hydrazine and  
5   hydrogen peroxide which, when properly catalyzed, decompose generating hot gasses. However,  
6   other alternatives are also interesting, for example using bipropellant concepts such as in [69]. The  
7   devices are composed of an inlet section, a catalyst chamber, and a nozzle as seen in Figure 5.

8       Hydrazine thrusters have been developed and used as primary propulsion and attitude control for  
9   large spacecraft due to the medium level performance regarding specific impulse. However, due to  
10   its high toxicity and flammability, it needs special procedures and equipment to handle it on  
11   ground which represents an increase in the overall development cost for CubeSats and  
12   PocketQubes [70].

13       Hydrogen peroxide is an interesting alternative since it does not need the level of precaution in  
14   handling it [71], [72]. One of its disadvantages is that organic materials are very likely to serve as a  
15   catalyst for its decomposition, therefore it might slowly decompose in the propellant tank due to  
16   minimum contact to undesired substances present in the storage. In the case of CubeSats that might  
17   be stored for long periods waiting for launch, a significant amount of propellant might be lost due to  
18   this fact.

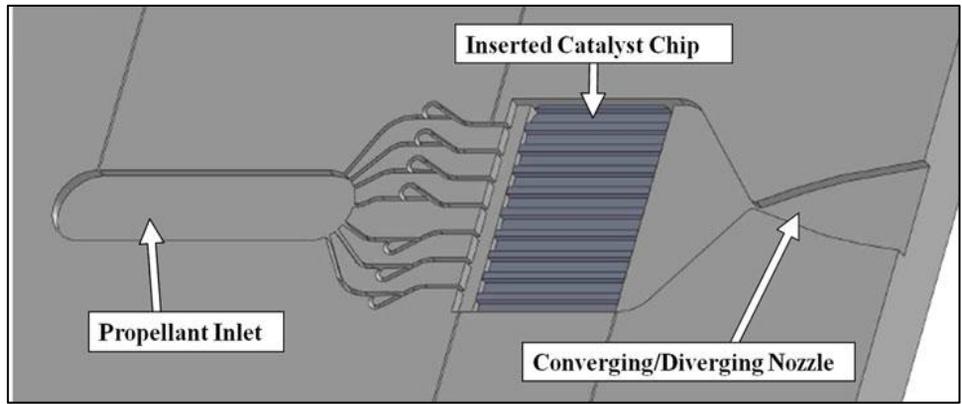

1

2

Figure 5 – Example of liquid propellant thruster [73].

3


4 **2.5 Electro spray thrusters – ES**

5

6

Electro spray thrusters are devices that produce thrust by emitting a spray of particles created by what is called a Taylor cone [74]. This effect occurs when an electric potential is applied to an ionic liquid in a capillary; once a threshold voltage is applied the liquid at the tip of the capillary sharpens and forms a cone emitting particles that can be either single ions, droplets or both. A schematic is shown in Figure 6.

9

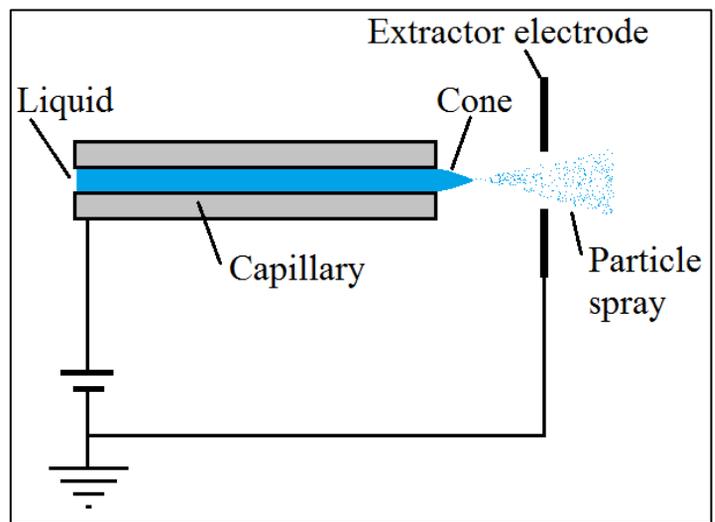

10

11

Figure 6 – Schematic of an electro spray thruster.

1 Each emitter depending on the design and type of propellant generates a thrust in terms of nano-  
2 to micro-Newtons [75], [76]. The number of emitters can be chosen depending on the type of  
3 satellite and mission and it usually is in the order of thousands of emitters per thruster in order to  
4 achieve reasonable thrust levels to perform maneuvers [77–80]. The propellant can be either an  
5 ionic liquid or mixture or a liquid metal and the emitters can be incremented with an accelerator  
6 grid after the extractor to further increase the exit velocity of the particles [81], [82].

7 The levels of thrust and specific impulse of these devices are aligned with the needs of  
8 PocketQubes and CubeSats and the modularity of the design and possibility of linearly changing  
9 the thrust by choosing the right number of emitters makes them an interesting choice for a  
10 propulsion system.

11

### 12 **3 Analysis and discussion**

13 In this paper, the performance of the micropropulsion systems is analyzed in terms of thrust,  
14 specific impulse, and power consumption. The first two are important performance parameters to  
15 be chosen depending on the type of mission and the size of the spacecraft. Only the thrust may have  
16 a maximum boundary, which, in the case of very small spacecraft, can be set by the maximum  
17 disturbances the attitude control system can handle, to assure a safe operation of the spacecraft. The  
18 power consumption is particularly important for small satellites, since CubeSats and PocketQubes  
19 have strict limitations on available power. Therefore, it is especially important for electric  
20 propulsion, e.g. resistojets or electrospray thrusters, and in other cases, such as liquid propellant  
21 thrusters, serves the only purpose of powering the control electronics which is needed for any  
22 system. Considering that each CubeSat unit typically produces about 2 W of power in low Earth  
23 orbits [83], then a 3U CubeSat would generate up to 6 W on average. A PocketQube has an area  
24 four times smaller than that of a CubeSat, then the power generated by 1U PocketQube can be

1 considered up to 0.5 W, and a 3U PocketQube would generate up to 1.5 W on average. The average  
2 power of a spacecraft is, however, a different thing to the power required by the propulsion system,  
3 because the thruster might not work continuously. However, this is also strictly connected to the  
4 thrust level: for low thrust systems, the thruster would need to be operated for a very long time in  
5 order to provide the same total impulse, which can be considered the same order of magnitude of  
6 the actual orbital time of the spacecraft; for systems where the thrust level is higher one can operate  
7 the thruster for a much shorter time, meaning that the required power is close, or higher, than the  
8 average power produced by the spacecraft. In this analysis we suggest some boundaries for these  
9 parameters in order to help the reader in selecting a propulsion system for their mission.

10 In the following, we elaborate on a case of a 3U CubeSat to derive the maximum thrust  
11 suggested for a safe operation of the spacecraft. Considering a 3U CubeSat with an attitude control  
12 system using reaction wheels that can provide up to 0.2 mNm of torque [84], [85] and a  
13 misalignment of the center of mass of the spacecraft of around 2 cm [86], we can derive the  
14 maximum disturbance torque that the thruster can generate while being counteracted by the attitude  
15 control. This represents a thrust of about 10 mN which can be considered a maximum for safe  
16 operation of the spacecraft. As the mass of a PocketQube is eight times smaller than that of an  
17 equivalent CubeSat, the maximum thrust for that category can be divided by the same factor  
18 resulting in a maximum thrust of around 1.25 mN. These values are shown in Figure 7 to Figure 9  
19 suggesting maximum boundaries for 3U satellites. It is noted that these boundaries might be larger  
20 in case of more advanced systems for power and stability control.

21 We present in Figure 7~12 an analysis of the average values of the mentioned parameters (thrust,  
22 specific impulse and power) collected from existing literature to provide an assessment of the  
23 current placement of each type of MEMS micropropulsion system. In the figures, the centers of the  
24 ellipses represent the average values for the parameters while the eccentricity of the ellipses

1 represent their standard deviation. The actual values of the parameters analyzed are presented in  
 2 Table 4 along with other important aspects to consider, such as pressure and temperature. The  
 3 average and standard deviation values are presented in Table 1.

4 In terms of thrust the solid-propellant thrusters are those with the highest values that might be  
 5 interesting for missions of space debris removal or where fast orbital maneuvers are needed, but the  
 6 lack of control in the operations renders them less interesting for applications requiring precision  
 7 maneuvers for example. In this case, systems using liquid propellant are more suitable since the  
 8 propellant flow can be controlled with valves. This comes, however, with a downside as the  
 9 complexity of the system would increase in contrast to solid-propellant engines.

10  
 11

12 Table 1: Average values of thrust, specific impulse and power of MEMS from existing literature.  
 13 The standard deviation is given in brackets.


	$F$ [N]	$I_{sp}$ [s]	$P$ [W]
VLM	9.58E-4 (1.79E-3)	5.28E+1 (4.62E+1)	3.62E+0 (3.34E+0)
LPM	9.45E-4 (8.51E-4)	7.08E+1 (2.72E+1)	2.36E+0 (2.78E+0)
CG	6.08E-4 (8.00E-4)	5.77E+1 (1.04E+1)	2.18E+0 (2.02E-1)
LP	5.07E-1 (1.13E+0)	1.18E+2 (1.06E+2)	-
SP	9.99E-1 (1.63E+0)	5.93E+1 (3.87E+1)	5.77E-1 (6.75E-1)
ES	5.45E-5 (3.96E-5)	2.97E+3 (1.72E+3)	8.34E-1 (8.51E-1)

14  
 15 In terms of specific impulse, the electro spray thrusters perform very well due to the high velocity  
 16 the propellant particles are expelled. The thrust produced by these engines, however, is relatively

1 low which makes them an attractive option for propulsion systems dedicated to, for example,  
2 attitude control or for long duration operation in case of orbit transfers.

3 As seen in Figure 8 and Figure 9, the power used by solid-propellant thrusters is low since they  
4 only require it for ignition of the propellant grain. Other devices, such as resistojets, need  
5 continuous power to ensure that the propellant is fully vaporized which requires higher energy  
6 consumption. Note that the power usually presented in references does not take into account the  
7 electronic circuits necessary to operate the engines. The reason is that most of them are in an early  
8 stage of development and the electronics are not designed for the flight model.

9

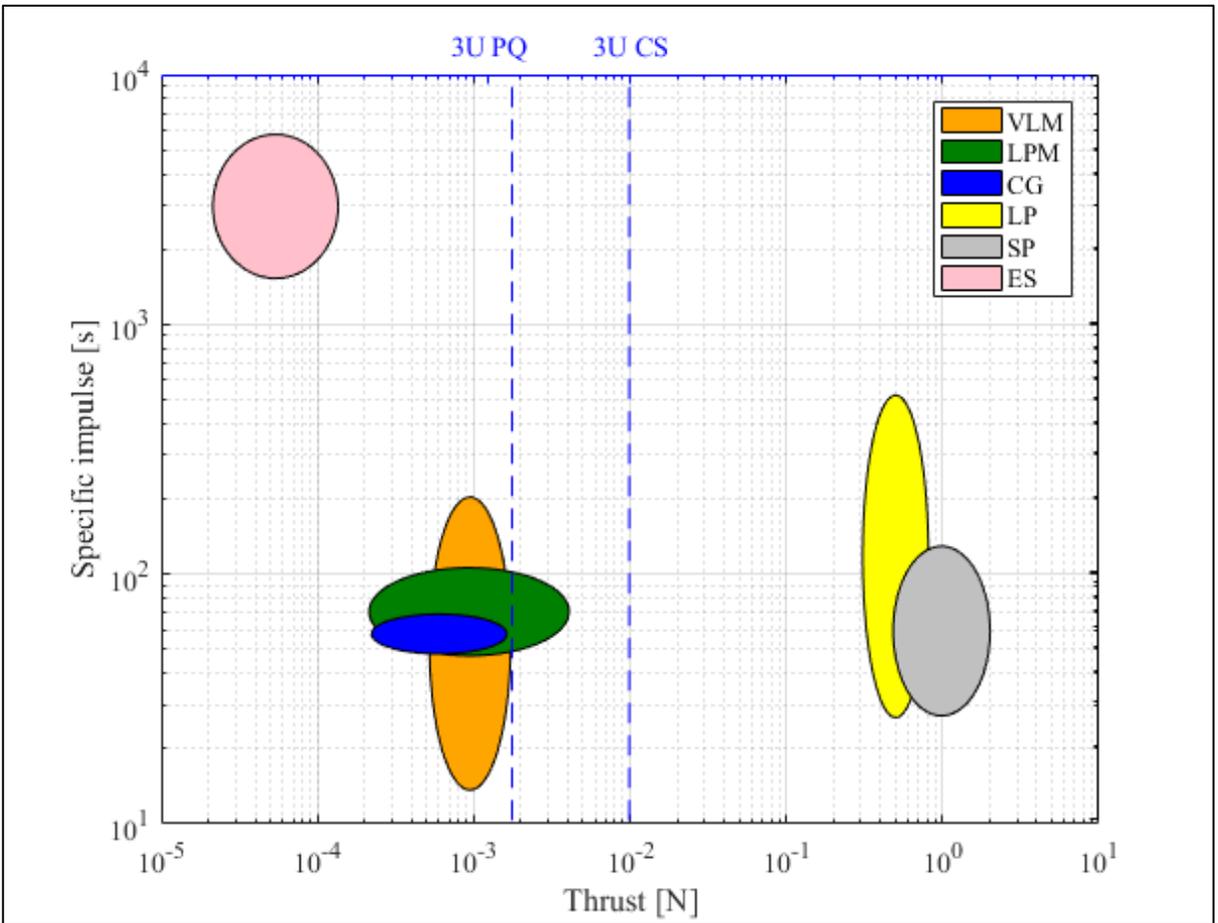

1

2

3

4

5

6

7

8

9

10

11

Figure 7 – Comparison of specific impulse and thrust of the different types of micropropulsion systems. The centers of the ellipses are the average values and the minor and major axes are proportional to the standard deviation. The dashed lines represent the maximum (suggested) thrust for 3 units PocketQubes (PQ) and CubeSats (CS).

Figure 7 shows a clear division in three sectors: high thrust, high specific impulse, and low thrust and specific impulse. This provides helpful insights into selecting the proper propulsion system for a specific mission. It also shows that there are regions not covered but could be achieved by doing, for example, some design optimization or using hybrid technology that combines the characteristics of two or more types. Table 2 presents the suggested applications of thrusters in the regions

1 identified. This is however just a rough classification, with the exact applicability of specific  
2 propulsion systems depending on the specific mission and spacecraft characteristics.

3

4 Table 2: Suggested applications for the different regions on Figure 7.

Thrust	Specific impulse	Suggested application
High	Low	space debris removal, fast orbital transfer/maneuvers (when spacecraft stability is not an issue)
Low	High	precise pointing, slow orbital transfer/maneuvers
Low	Low	attitude control, small orbit corrections (max. $\Delta V$ in the order of a few m/s)


5

6 As mentioned, the power is a special constraint for the classes of satellites analyzed here (also  
7 for other classes) and, as Figure 8 and Figure 9 illustrate, there are no significant gaps in the range  
8 of power. However, the top values as indicated with the dashed lines are high for the limits of 3U  
9 CubeSats and PocketQubes.

10 Figure 7 clearly shows two different trends for chemical propulsion, and for electrical  
11 propulsion. Furthermore, the area covered by resistojets (orange and green ellipses) can fit within  
12 both trends, thus showing the hybrid nature of this concept where the propellant is heated  
13 electrically, but accelerated thermodynamically in a nozzle. In Figure 8, looking at the centers of  
14 the ellipses (the averages) a relationship between power and thrust for all electric propulsion  
15 concepts is evident. This is expected, since in electric propulsion the thrust is power-driven. It can  
16 also be observed that chemical propulsion is not part of this trend. Finally, in Figure 9, a close  
17 relationship between power and specific impulse for all the concepts considered. Again, this is to be  
18 expected, since specific impulse is a measure of the energy delivered by the system.

19

20

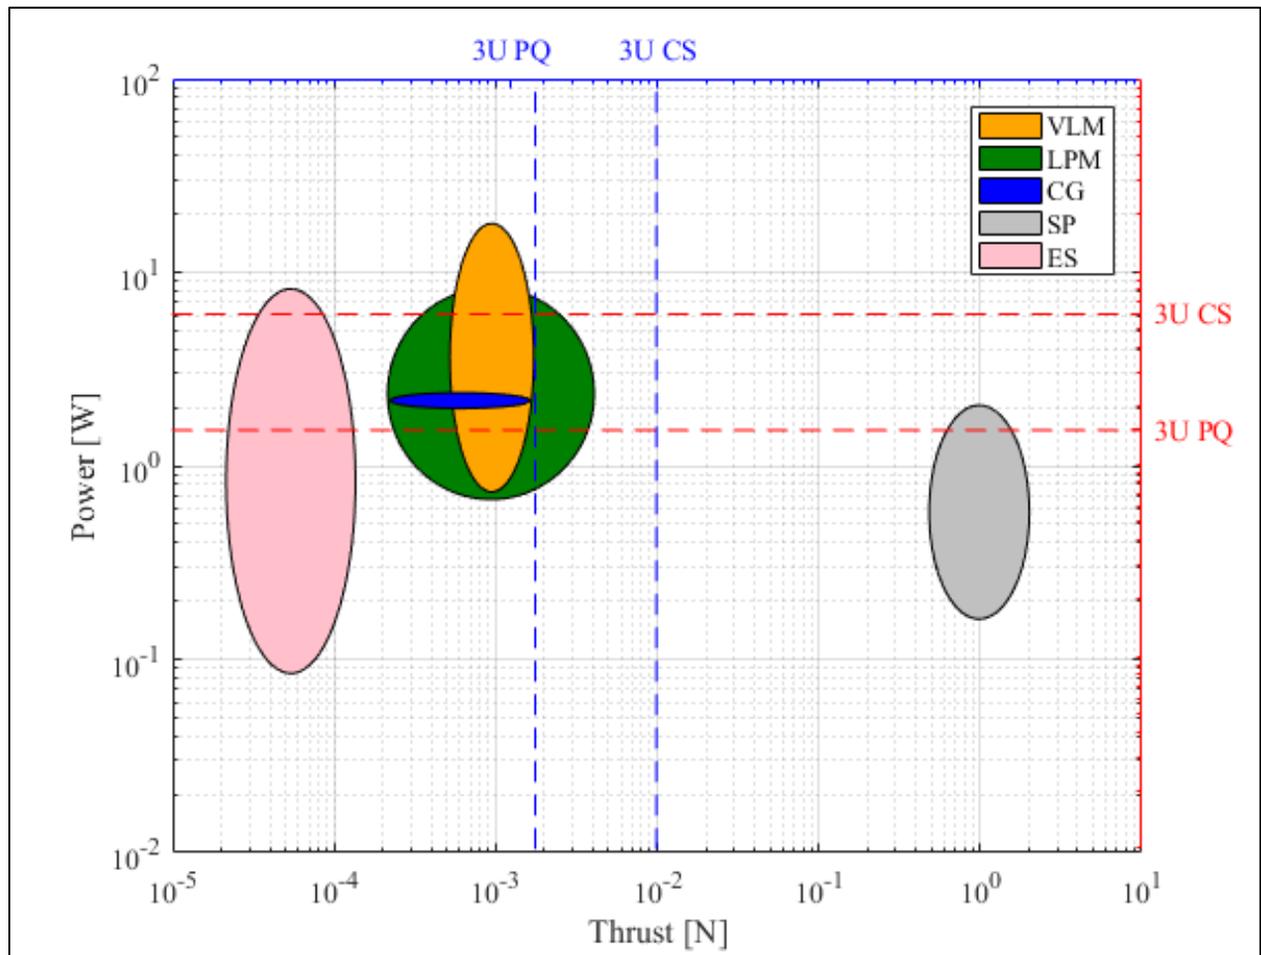

1  
 2 Figure 8 – Comparison of power and thrust of the different types of micropropulsion systems. The  
 3 centers of the ellipses are the average values and the minor and major axes are proportional to the  
 4 standard deviation. The devices using liquid propellant usually use electric power only for control  
 5 electronics, so they are not present in the graph. The dashed lines represent the maximum  
 6 (suggested) thrust for 3 units PocketQubes (PQ) and CubeSats (CS).

7  
 8 Looking at the boundaries suggested, if the boundary line falls in the middle of an ellipse, that  
 9 type of propulsion is probably feasible since there might be a way of scaling it down to the desired  
 10 power level levels of power or thrust. If the entire ellipse lies higher than the maximum level, then  
 11 we can conclude that the current technology does not allow the use of that type of propulsion in that

1 type of satellite. Thus, it can be concluded that in terms of power, most of the devices fit into the  
2 maximum for 3U CubeSats but if we increase this threshold, then we can consider all of the types  
3 for a possible propulsion system. For a 3U PocketQube, however, the situation is more difficult  
4 since the limitation in the power affects all types analyzed. In terms of thrust, solid and liquid  
5 propellant engines generate more thrust than the suggested maximum. This problem can be  
6 overcome with a more advanced attitude control system to compensate for disturbances or by  
7 reducing uncertainties in the position of the center of mass.

8 One important aspect when comparing or selecting a micropropulsion system is the complexity  
9 of the system in terms of integration and operation characteristics. The former regards additional  
10 constraints to the design, such as fluidic fittings and connections, and the latter relates to, e.g.,  
11 scheduling constraints in the communication link that have to be considered in the actuation of the  
12 thrusters, since control of the input parameters might not be realizable with CubeSats and  
13 PocketQubes due to data link limitations for example. An automatic controller may be considered  
14 to avoid this issue but will require more effort in the development. Here, to characterize complexity,  
15 we select four parameters characterizing each system: the minimum number of additional  
16 components that are needed in the system on top of the actual thruster and control electronics; the  
17 number of control parameters for the system; and the start-up and shut-down times which are  
18 respectively the times needed to achieve steady state full thrust and to completely shut down the  
19 engine, i.e. achieve zero thrust, from the moment when the command is sent. These last two  
20 parameters are important if one wants to perform precise maneuvers that need a specific total  
21 impulse, then the time needed to achieve steady state and to shut the engine down have to be taken  
22 into account in the calculations.

23 The number of components and the number of control parameters are given quantitative values  
24 from 1 to 3 and the start-up and shut-down times are given qualitative values from low to high

1 corresponding to short and long times respectively. The complexity is then calculated as the  
 2 average of these parameters (taking the numbers 1 to 3 for the qualitative values) and if the result is  
 3 from 0 to 1 we consider low complexity, from 1 to 2 medium, and from 2 to 3 high. Table 3 lists the  
 4 4 parameters for each type of system and provides the resulting complexity.

5 As we can see, the complexity increases with number of components and parameters. But on the  
 6 other hand, a more controllable operation of the thruster may be achieved therefore increasing the  
 7 performance and optimal use of propellant.


8

9 Table 3: Assessment of operational complexity of the types of MEMS micropropulsion.

Type	Complexity	Minimum number of components	Number of control parameters	Start-up time	Shut-down time	Comment
VLM	High	3 (heater, valve, tank)	2 (power, flow rate)	high	high	Liquid left in the path from the valve to the thruster gives high shut down time.
LPM	Medium	2 (valve, tank)	1 (flow rate)	low	medium	Number of control parameters and components increase if applying temperature to the gas or using liquid propellant.
CG	Medium	2 (valve, tank)	1 (flow rate)	low	medium	Number of control parameters and components increase in warm gas mode.
LP	Medium	2 (valve, tank)	1 (flow rate)	medium	high	May require power to accelerate the start up. Same issue with liquid and shut down time as for VLM.
SP	Low	1 (igniter)	1 (power)	medium	-	Shut down is not controllable.
ES	Medium	2 (tank, energy storage)	1 (power)	low	low	Number of control parameters increases if using an accelerator grid

10

11

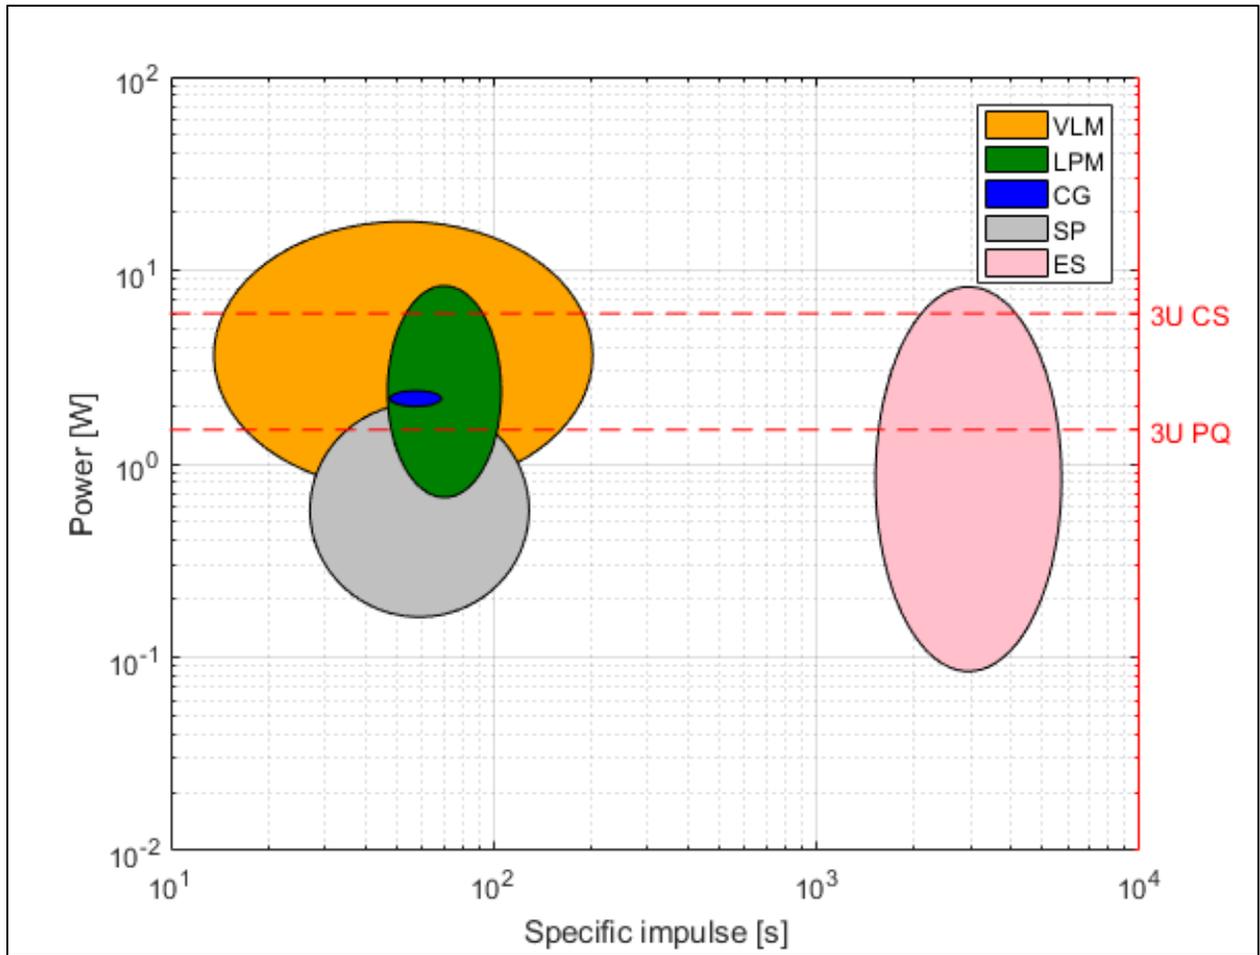

1  
 2 Figure 9 – Comparison of power and specific impulse of the different types of micropropulsion  
 3 systems. The centers of the ellipses are the average values and the minor and major axes are  
 4 proportional to the standard deviation. The devices using liquid propellant usually use electric  
 5 power only for control electronics, so they are not present in the graph. The dashed lines represent  
 6 the maximum (suggested) thrust for 3 units PocketQubes (PQ) and CubeSats (CS).

7  
 8  
 9  
 10  
 11

1 Table 4: Data for comparison extracted from the references in the first column.

Ref.	Type	$P_{min}$ [W]	$P_{max}$ [W]	$F_{min}$ [N]	$F_{max}$ [N]	$Isp_{min}$ [s]	$Isp_{max}$ [s]	$p_{min}$ [Pa]	$p_{max}$ [Pa]	$T_{min}$ [K]	$T_{max}$ [K]
[49]	CG	n/a	n/a	0.00E+00	2.00E-03	4.50E+01	4.50E+01	0.00E+00	5.00E+05	n/a	n/a
[50]	CG	2.35E+00	2.35E+00	0.00E+00	1.00E-03	6.80E+01	6.80E+01	2.00E+05	5.00E+05	n/a	n/a
[52]	CG	2.00E+00	2.00E+00	0.00E+00	6.50E-04	6.00E+01	6.00E+01	2.00E+05	5.00E+05	n/a	n/a
[78]	ES	5.53E-01	2.50E+00	3.12E-05	9.98E-05	4.74E+02	5.93E+03	n/a	n/a	n/a	n/a
[77]	ES	6.50E-01	4.00E-01	2.00E-05	3.00E-05	3.00E+03	3.00E+03	n/a	n/a	n/a	n/a
[75]	ES	1.00E-01	8.00E-01	5.00E-06	5.00E-05	1.50E+03	3.26E+03	n/a	n/a	n/a	n/a
[80]	ES	n/a	n/a	1.00E-04	1.00E-04	2.00E+03	4.60E+03	n/a	n/a	n/a	n/a
[69]	LP	n/a	n/a	0.00E+00	1.00E+00	0.00E+00	1.50E+02	0.00E+00	1.20E+06	n/a	n/a
[87]	LP	n/a	n/a	2.00E-04	1.97E-03	2.92E+00	1.34E+01	n/a	n/a	n/a	n/a
[47]	LPM	1.16E+00	1.16E+00	1.70E-03	1.70E-03	5.60E+01	5.60E+01	n/a	n/a	n/a	n/a
[43]	LPM	n/a	n/a	1.00E-04	1.00E-03	4.00E+01	8.00E+01	5.00E+01	2.00E+02	3.00E+02	5.73E+02
[88]	LPM	8.00E-01	5.60E+00	1.00E-03	1.60E-03	7.00E+01	7.00E+01	4.90E+01	4.90E+01	5.74E+02	1.17E+03
[89]	LPM	1.46E+00	9.68E+00	2.80E-04	2.72E-03	6.37E+01	1.11E+02	5.00E+01	3.00E+02	3.00E+02	9.00E+02
[90]	LPM	1.00E+00	3.40E+00	1.00E-04	1.70E-03	4.00E+01	1.40E+02	3.50E+01	1.20E+02	3.00E+02	5.00E+02
[25]	LPM	0.00E+00	2.50E+00	1.29E-04	1.29E-04	7.92E+01	7.92E+01	n/a	n/a	3.00E+02	5.80E+02
[48]	LPM	0.00E+00	1.60E+00	0.00E+00	1.07E-03	5.20E+01	5.40E+01	2.55E+02	9.00E+02	2.74E+02	5.44E+02
[64]	SP	1.60E+00	1.60E+00	4.00E-03	1.00E-02	1.00E+02	1.00E+02	n/a	n/a	n/a	n/a
[59]	SP	3.40E-01	3.40E-03	3.62E+00	3.62E+00	6.23E+01	6.23E+01	n/a	n/a	n/a	n/a
[55]	SP	0.00E+00	7.50E-01	4.00E-02	5.10E-02	n/a	n/a	n/a	n/a	1.53E+03	1.53E+03
[67]	SP	1.60E-01	1.60E-01	5.00E-02	6.00E-01	2.68E+00	2.83E+01	n/a	n/a	n/a	n/a
[28]	VLM	n/a	n/a	2.00E-03	6.50E-03	1.10E+02	1.10E+02	1.00E+05	2.60E+05	4.54E+02	5.74E+02
[41]	VLM	0.00E+00	5.00E+00	2.50E-04	6.34E-04	3.10E+01	3.10E+01	n/a	n/a	3.24E+02	6.83E+02
[30]	VLM	n/a	n/a	1.00E-03	6.00E-03	3.07E+01	3.07E+01	1.00E+05	2.00E+05	4.23E+02	5.73E+02
[42]	VLM	7.10E+00	9.20E+00	3.36E-05	6.77E-05	3.42E+00	6.90E+00	1.04E+05	1.04E+05	4.00E+02	4.22E+02
[38]	VLM	1.60E+00	3.60E+00	1.50E-04	1.01E-03	5.00E+01	1.05E+02	1.00E+05	1.00E+05	3.74E+02	4.74E+02
[72]	VLM	2.00E+00	2.20E+00	3.00E-04	1.08E-03	8.00E+01	1.80E+02	n/a	n/a	4.23E+02	4.23E+02
[35]	VLM	1.00E+00	2.40E+00	5.00E-06	1.60E-04	2.04E+01	2.04E+01	n/a	n/a	3.75E+02	3.76E+02
[34]	VLM	1.00E+00	2.40E+00	5.00E-06	1.20E-04	1.75E+01	1.75E+01	n/a	n/a	n/a	n/a
[39]	VLM	n/a	n/a	2.00E-05	9.60E-04	6.53E+01	6.53E+01	0.00E+00	6.00E+05	2.74E+02	6.24E+02
[32]	VLM	7.80E+00	1.08E+01	3.10E-04	4.60E-04	8.85E+01	8.85E+01	n/a	n/a	n/a	n/a
[36]	VLM	9.00E-01	9.70E-01	7.10E-07	2.86E-06	1.91E+00	7.68E+00	n/a	n/a	n/a	n/a

2

3

### 4 3.1 Future developments

5 Although there has been a significant effort in developing micropropulsion systems, there are  
6 still challenges to be addressed. For highly miniaturized satellites, the devices may be so small that  
7 interfacing them to other larger components of the system becomes more and more difficult. In  
8 some cases, the electronics might be integrated into the fabrication process, which is one of the  
9 advantages of using MEMS, to incorporate sensors and control circuits into the “smart thrusters”.

10 This integration can also be extended to, for example, valves or pumps [91], [92] that can be

1 manufactured in wafers with similar processes leading to a complete “propulsion on a chip” system  
2 which is very interesting for extremely miniaturized satellites.

3 The integration of the components of a propulsion system is one of the main challenges since  
4 traditionally these parts come separately (e.g. valves, tanks, etc.). However, with the advance of  
5 MEMS technology, more integrated devices can be accommodated in very small spacecraft. This  
6 requires a good and reliable interface between mechanical, electrical, and fluidic parts. The  
7 integration of the system and interfaces between the macro and micro systems, and components,  
8 such as microvalves to control the mass flow rate, the electronic circuits, and the propellant  
9 management, are some of the engineering challenges that can be facilitated with the use of MEMS.

10 Regarding the manufacturing processes, new technologies and materials such as membranes,  
11 thin metal layers, or composites will allow for designing and building ultra-light components, for  
12 example tanks, that currently consume most of the dry mass budget. With the development of  
13 additive manufacturing methods, the emerging 3D printing technology is an interesting option that  
14 might facilitate the integration and interfacing of mechanical, electrical, and fluidic parts [93–95].  
15 Other conventional manufacturing approaches also allow the development of advanced systems  
16 that may be compatible with CubeSat standards [96–113]. Also, innovative propellants, especially  
17 green ones, might open the path to new concepts of thrusters or new ways of using them.

18 Concerning operation of thrusters, there are challenges related to disturbances generated by the  
19 thruster in combination with a possibly movable center of mass. This might require a more  
20 sophisticated system with micro-gimballed nozzles or arrays of micro-thrusters in order to allow  
21 thrust direction control. The use of MEMS pumps for avoiding pressurization of the propellant may  
22 also be considered an option to facilitate the operation by having a more controlled pressure system  
23 and reducing the total mass of the system in exchange of complexity and power consumption.

24

## 1 **4 Conclusions**

2 This paper presented and analyzed the status of development of micropropulsion systems that  
3 are candidates for CubeSat and PocketQube missions. We have analyzed more than thirty devices  
4 regarding performance aspects and assessed them in face of limitations imposed by the types of  
5 satellites.

6 We have introduced a simple way of comparing the operational complexity of the systems in  
7 order to help the reader in choosing a propulsion system for the mission but the comparison also  
8 shows where interesting operational characteristics can be found on each type of device and where  
9 new methods could be developed.

10 As we discussed in the previous section, there is room for improvements in general for all the  
11 types of propulsion systems assessed here. In some cases, there is no definite design of the system  
12 but only analyzes on the propulsive performance. The use of MEMS fabrication technologies is a  
13 great advantage in the sense that this is a very active research field and its processes are well  
14 developed so that some of the possible challenges in the miniaturization of propulsion systems have  
15 already been addressed with other perspectives in other fields. Also, it is very interesting especially  
16 for the fabrication of very small structures and channels. However, other components of the system,  
17 such as propellant tanks and electronic circuits, have to be made using conventional manufacturing  
18 techniques. Also, other fabrication methods have to be analyzed considering costs of fabrication  
19 since MEMS can be highly expensive in a small-scale production which is the case for nano- and  
20 pico-satellites. In addition, other unconventional approaches of propellantless propulsion (solar sail  
21 is the main option ) or the ejection of solid particles can be interesting alternatives and have to be  
22 further investigated.

1 We have shown that the systems analyzed can be grouped and separated according to the  
2 performance parameters evaluated and also the operational complexities can be used to define  
3 which approach is better for certain missions.

## 4 **Acknowledgements**

6 The present work was supported by CNPq, Conselho Nacional de Desenvolvimento Científico e  
7 Tecnológico – Brasil.

## 9 **5 References**

- 10 [1] B. Sanders, L. Van Vliet, F. Tata Nardini, T. Gronland, P. Rangsten, H. Shea, M. Noca, R.  
11 Visee, B. Monna, J. Stark, Bulit, A., and D. M. Di Cara, “Development of MEMS based  
12 Electric Propulsion,” in *Space Propulsion Conference 2010*, 2010.
- 13 [2] J. Bouwmeester and J. Guo, “Survey of worldwide pico- and nanosatellite missions,  
14 distributions and subsystem technology,” *Acta Astronautica*, vol. 67, no. 7–8, pp. 854–862,  
15 2010.
- 16 [3] D. Selva and D. Krejci, “A survey and assessment of the capabilities of Cubesats for Earth  
17 observation,” *Acta Astronautica*, vol. 74, pp. 50–68, 2012.
- 18 [4] C. R. Boshuizen, J. Mason, P. Klupar, and S. Spanhake, “Results from the Planet Labs Flock  
19 Constellation,” in *28th Annual AIAA/USU Conference on Small Satellites*, 2014.
- 20 [5] K. Woellert, P. Ehrenfreund, A. J. Ricco, and H. Hertzfeld, “Cubesats: Cost-effective  
21 science and technology platforms for emerging and developing nations,” *Advances in Space  
22 Research*, vol. 47, no. 4, pp. 663–684, 2011.
- 23 [6] J. Guo, J. Bouwmeester, and E. Gill, “In-orbit results of Delfi-n3Xt: Lessons learned and  
24 move forward,” *Acta Astronautica*, vol. 121, no. In progress, pp. 39–50, 2016.
- 25 [7] A. Ketsdever and M. Micci, “Thruster Options for Microspacecraft: A Review and  
26 Evaluation of State-of-the-Art and Emerging Technologies,” in *Micropropulsion for Small  
27 Spacecraft*, American Institute of Aeronautics and Astronautics, 2000, pp. 45–137.
- 28 [8] W. P. Wright and P. Ferrer, “Electric micropropulsion systems,” *Progress in Aerospace  
29 Sciences*, vol. 74, no. 0, pp. 48–61, 2015.
- 30 [9] L. Johnson, M. Whorton, A. Heaton, R. Pinson, G. Laue, and C. Adams, “NanoSail-D: A  
31 solar sail demonstration mission,” *Acta Astronautica*, vol. 68, no. 5–6, pp. 571–575, 2011.
- 32 [10] V. Lappas, N. Adeli, L. Visagie, J. Fernandez, T. Theodorou, W. Steyn, and M. Perren,  
33 “CubeSail: A low cost CubeSat based solar sail demonstration mission,” *Advances in Space  
34 Research*, vol. 48, no. 11, pp. 1890–1901, 2011.
- 35 [11] A. Pukniel, V. Coverstone, R. Burton, and D. Carroll, “The dynamics and control of the  
36 CubeSail mission: A solar sailing demonstration,” *Advances in Space Research*, vol. 48, no.  
37 11, pp. 1902–1910, 2011.

- 1 [12] B. Fu, E. Sperber, and F. Eke, "Solar sail technology—A state of the art review," *Progress*  
2 *in Aerospace Sciences*, vol. Article in Press, Aug. 2016.
- 3 [13] G. Manzoni and Y. Brama, "Cubesat micropropulsion characterization in low earth orbit,"  
4 *in 29th Annual AIAA/USU Conference on Small Satellites*, 2015.
- 5 [14] S. Nanospace, "NanoSpace: MEMS for Space Smallest on Earth, Datasheet." .
- 6 [15] D. Rankin, D. D. Kekez, R. E. Zee, F. M. Pranajaya, D. G. Foisy, and A. M. Beattie, "The  
7 CanX-2 nanosatellite: Expanding the science abilities of nanosatellites," *Acta Astronautica*,  
8 vol. 57, no. 2–8, pp. 167–174, 2005.
- 9 [16] M. Keidar, T. Zhuang, A. Shashurin, G. Teel, D. Chiu, J. Lukas, S. Haque, and L. Brieda,  
10 "Electric propulsion for small satellites," *Plasma Physics and Controlled Fusion*, vol. 57,  
11 no. 1, p. 014005, 2014.
- 12 [17] K. Lemmer, "Propulsion for CubeSats," *Acta Astronautica*, vol. 134, pp. 231–243, 2017.
- 13 [18] M. Leomanni, A. Garulli, A. Giannitrapani, and F. Scortecci, "Propulsion options for very  
14 low Earth orbit microsattellites," *Acta Astronautica*, vol. 133, pp. 444–454, 2017.
- 15 [19] P. Lozano, "MEMS thrusters for nano- and pico-satellites," in *Mems for Automotive and*  
16 *Aerospace Applications*, M. Kraft and N. M. White, Eds. Woodhead Publishing, 2013, pp.  
17 283–310.
- 18 [20] J. Mueller, "Thruster options for microspacecraft: a review and evaluation of existing  
19 hardware and emerging technologies," *AIAA paper*, vol. 3058, p. 1997, 1997.
- 20 [21] J. Mueller, R. Hofer, and J. Ziemer, "Survey of propulsion technologies applicable to  
21 cubesats," Pasadena, CA : Jet Propulsion Laboratory, National Aeronautics and Space  
22 Administration, Pasadena, CA, USA, 2010.
- 23 [22] C. Rossi, "Micropropulsion for Space — A Survey of MEMS-based Micro Thrusters and  
24 their Solid Propellant Technology," *Sensors Update*, vol. 10, no. 1, pp. 257–292, 2002.
- 25 [23] E. Gill, P. Sundaramoorthy, J. Bouwmeester, B. Zandbergen, and R. Reinhard, "Formation  
26 flying within a constellation of nano-satellites: The {QB50} mission," *Acta Astronautica*,  
27 vol. 82, no. 1, pp. 110–117, 2013.
- 28 [24] M. Ivanov, G. Markelov, A. Ketsdever, and D. Wadsworth, "Numerical study of cold gas  
29 micronozzle flows," in *37th Aerospace Sciences Meeting and Exhibit*, American Institute of  
30 Aeronautics and Astronautics, 1999.
- 31 [25] R. H. Lee, T. C. Lilly, M. D. Killingsworth, J. A. Duncan, A. D. Ketsdever, and A. Bauer,  
32 "Free-molecule-microresistojet performance using water propellant for nanosatellite  
33 applications," *Journal of Spacecraft and Rockets*, vol. 45, no. 2, pp. 264–269, 2008.
- 34 [26] K. H. Cheah and J. K. Chin, "Performance improvement on {MEMS} micropropulsion  
35 system through a novel two-depth micronozzle design," *Acta Astronautica*, vol. 69, no. 1–2,  
36 pp. 59–70, 2011.
- 37 [27] P. Haris and T. Ramesh, "Numerical Simulation of Superheated Steam Flow in a  
38 Micronozzle," in *Applied Mechanics and Materials*, 2014, vol. 592, pp. 1677–1681.
- 39 [28] J. W. Cen and J. L. Xu, "Performance evaluation and flow visualization of a MEMS based  
40 vaporizing liquid micro-thruster," *Acta Astronautica*, vol. 67, no. 3–4, pp. 468–482, 2010.
- 41 [29] C.-C. Chen, H.-C. Kan, M.-H. Lee, and C.-W. Liu, "Computational study on vaporizing  
42 liquid micro-thruster," in *Microsystems, Packaging, Assembly and Circuits Technology*  
43 *Conference (IMPACT), 2012 7th International*, 2012, pp. 68–71.
- 44 [30] C.-C. Chen, C.-W. Liu, H.-C. Kan, L.-H. Hu, G.-S. Chang, M.-C. Cheng, and B.-T. Dai,  
45 "Simulation and experiment research on vaporizing liquid micro-thruster," *Sensors and*  
46 *Actuators A: Physical*, vol. 157, no. 1, pp. 140–149, 2010.

- 1 [31] P. Kundu, T. Bhattacharyya, and S. Das, "Electro-thermal analysis of an embedded boron  
2 diffused microheater for thruster applications," *Microsystem Technologies*, vol. 20, no. 1,  
3 pp. 23–33, 2014.
- 4 [32] E. . Mukerjee, A. . Wallace, K. . Yan, D. . Howard, R. . Smith, and S. . Collins, "Vaporizing  
5 liquid microthruster," *Sensors and Actuators A: Physical*, vol. 83, no. 1–3, pp. 231–236,  
6 2000.
- 7 [33] D. C. Guerrieri, M. A. C. Silva, A. Cervone, and E. Gill, "Selection and Characterization of  
8 Green Propellants for Micro-Resistojets," *ASME Journal of Heat Transfer*, vol. 139, no. 10,  
9 p. 9, 2017.
- 10 [34] D. K. Maurya, S. Das, and S. K. Lahiri, "An analytical model of a silicon MEMS vaporizing  
11 liquid microthruster and some experimental studies," *Sensors and Actuators A: Physical*,  
12 vol. 122, no. 1, pp. 159–166, 2005.
- 13 [35] D. K. Maurya, S. Das, and S. K. Lahiri, "Silicon MEMS vaporizing liquid microthruster  
14 with internal microheater," *Journal of Micromechanics and Microengineering*, vol. 15, no.  
15 5, p. 966, 2005.
- 16 [36] X. . Ye, F. Tang, H. . Ding, and Z. . Zhou, "Study of a vaporizing water micro-thruster,"  
17 *Sensors and Actuators A: Physical*, vol. 89, no. 1–2, pp. 159–165, 2001.
- 18 [37] M. Gad-el-Hak, *The MEMS handbook*. CRC press, 2001.
- 19 [38] P. Kundu, T. K. Bhattacharyya, and S. Das, "Design, fabrication and performance  
20 evaluation of a vaporizing liquid microthruster," *Journal of Micromechanics and*  
21 *Microengineering*, vol. 22, no. 2, p. 025016, 2012.
- 22 [39] M. Mihailovic, T. V. Mathew, J. F. Creemer, B. T. C. Zandbergen, and P. M. Sarro, "MEMS  
23 silicon-based resistojet micro-thruster for attitude control of nano-satellites," in *Solid-State*  
24 *Sensors, Actuators and Microsystems Conference (TRANSDUCERS), 2011 16th*  
25 *International*, 2011, pp. 262–265.
- 26 [40] M. A. C. Silva, D. C. Guerrieri, H. van Zeijl, A. Cervone, and E. Gill, "Vaporizing Liquid  
27 Microthrusters with integrated heaters and temperature measurement," *Sensors and*  
28 *Actuators A: Physical*, vol. 265, pp. 261–274, 2017.
- 29 [41] K. H. Cheah and K.-S. Low, "Fabrication and performance evaluation of a high temperature  
30 co-fired ceramic vaporizing liquid microthruster," *Journal of Micromechanics and*  
31 *Microengineering*, vol. 25, no. 1, p. 015013, 2015.
- 32 [42] K. Karthikeyan, S. K. Chou, L. E. Khoong, Y. M. Tan, C. W. Lu, and W. M. Yang, "Low  
33 temperature co-fired ceramic vaporizing liquid microthruster for microspacecraft  
34 applications," *Applied Energy*, vol. 97, no. 0, pp. 577–583, 2012.
- 35 [43] Z. Ahmed, S. F. Gimelshein, and A. D. Ketsdever, "Numerical analysis of free-molecule  
36 microresistojet performance," *Journal of propulsion and power*, vol. 22, no. 4, pp. 749–756,  
37 2006.
- 38 [44] A. D. Ketsdever, D. C. Wadsworth, S. Vargo, and E. P. Muntz, "The Free Molecule  
39 Micro-Resistojet: An Interesting Alternative to Nozzle Expansion," in *34th*  
40 *AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit*, 1998.
- 41 [45] D. C. Guerrieri, A. Cervone, and E. Gill, "Analysis of Nonisothermal Rarefied Gas Flow in  
42 Diverging Microchannels for Low-Pressure Microresistojets," *Journal of Heat Transfer*,  
43 vol. 138 (11), no. 11, pp. 112403–112403–11, 2016.
- 44 [46] D. C. Guerrieri, M. A. C. Silva, H. van Zeijl, A. Cervone, and E. Gill, "Fabrication and  
45 characterization of low pressure micro-resistojets with integrated heater and temperature  
46 measurement," *Journal of Micromechanics and Microengineering*, vol. 27, no. 12, p.  
47 125005, 2017.

- 1 [47] A. Blanco and S. Roy, "Numerical Simulation of a Free Molecular Electro Jet (FMEJ) for  
2 In-Space Propulsion," in *51st AIAA Aerospace Sciences Meeting including the New  
3 Horizons Forum and Aerospace Exposition*, 2013, p. 208.
- 4 [48] K. Palmer, H. Nguyen, and G. Thornell, "Fabrication and evaluation of a free molecule  
5 micro-resistojet with thick silicon dioxide insulation and suspension," *Journal of  
6 Micromechanics and Microengineering*, vol. 23, no. 6, p. 065006, 2013.
- 7 [49] J. Kohler, J. Bejhed, H. Kratz, F. Bruhn, U. Lindberg, K. Hjort, and L. Stenmark, "A hybrid  
8 cold gas microthruster system for spacecraft," *Sensors and Actuators A: Physical*, vol. 97–  
9 98, no. 0, pp. 587–598, 2002.
- 10 [50] U. Kvell, M. Puusepp, F. Kaminski, J.-E. Past, K. Palmer, T.-A. Grönland, and M. Noorma,  
11 "Nanosatellite orbit control using MEMS cold gas thrusters," *Proceedings of the Estonian  
12 Academy of Sciences*, vol. 63, no. 2S, pp. 279–285, 2014.
- 13 [51] M. C. Louwerse, "Cold Gas Micro Propulsion, Ph.D. Thesis, University of Twente,  
14 Enschede, The Netherlands," University of Twente, 2009.
- 15 [52] P. Rangsten, K. Palmer, J. Bejhed, A. Zaldivar Salaverri, K. Jonsson, and T.-A. Grönland,  
16 "Closed-loop Thrust Control in a MEMS-based Micro Propulsion Module for CubeSats," in  
17 *Small Satellite Conference*, 2013.
- 18 [53] L. Stenmark and A. Eriksson, "Cold Gas Micro Thrusters," in *NanoTech 2002 - "At the  
19 Edge of Revolution*, American Institute of Aeronautics and Astronautics, 2002.
- 20 [54] D. H. Lewis., S. W. Janson, R. B. Cohen, and E. K. Antonsson, "Digital micropropulsion,"  
21 *Sensors and Actuators A: Physical*, vol. 80, no. 2, pp. 143–154, 2000.
- 22 [55] C. Rossi, T. D. Conto, D. Estève, and B. Larangot, "Design, fabrication and modelling of  
23 MEMS-based microthrusters for space application," *Smart Materials and Structures*, vol.  
24 10, no. 6, p. 1156, 2001.
- 25 [56] C. Rossi, B. Larangot, D. Lagrange, and A. Chaalane, "Final characterizations of  
26 MEMS-based pyrotechnical microthrusters," *Sensors and Actuators A: Physical*, vol. 121,  
27 no. 2, pp. 508–514, 2005.
- 28 [57] C. Rossi, S. Orieux, B. Larangot, T. D. Conto, and D. Estève, "Design, fabrication and  
29 modeling of solid propellant microrocket-application to micropropulsion," *Sensors and  
30 Actuators A: Physical*, vol. 99, no. 1–2, pp. 125–133, 2002.
- 31 [58] D. Seo, J. Lee, and S. Kwon, "The development of the micro-solid propellant thruster array  
32 with improved repeatability," *Journal of Micromechanics and Microengineering*, vol. 22,  
33 no. 9, p. 094004, 2012.
- 34 [59] J. Lee, K. Kim, and S. Kwon, "Design, fabrication, and testing of {MEMS} solid propellant  
35 thruster array chip on glass wafer," *Sensors and Actuators A: Physical*, vol. 157, no. 1, pp.  
36 126–134, 2010.
- 37 [60] J. Lee and T. Kim, "MEMS solid propellant thruster array with micro membrane igniter,"  
38 *Sensors and Actuators A: Physical*, vol. 190, pp. 52–60, 2013.
- 39 [61] A. Chaalane, R. Chemam, M. Houabes, R. Yahiaoui, A. Metatla, B. Ouari, N. Metatla, D.  
40 Mahi, A. Dkhissi, and D. Esteve, "A MEMS-based solid propellant microthruster array for  
41 space and military applications," in *Journal of Physics: Conference Series*, 2015, vol. 660,  
42 no. 1, p. 012137.
- 43 [62] H.-U. Oh, T.-G. Kim, S.-H. Han, and J. Lee, "Verification of MEMS fabrication process for  
44 the application of MEMS solid propellant thruster arrays in space through launch and  
45 on-orbit environment tests," *Acta Astronautica*, vol. 131, pp. 28–35, 2017.

- 1 [63] X. Wu, P. Dong, Z. li, S. Li, Q. Liu, C. Xu, and H. Wan, "Design, fabrication and  
2 characterization of a solid propellant micro-Thruster," in *2009 4th IEEE International  
3 Conference on Nano/Micro Engineered and Molecular Systems*, 2009, pp. 476–479.
- 4 [64] D. Briand, L. Guillot, U. Bley, S. Danninger, V. Gass, N. De Rooij, and R. Ammotec,  
5 "Digital micro-thrusters with simplified architecture and reliable ignition and combustion,"  
6 in *Proceedings Power MEMS 2008 (Sendai, Japan, 9-12 November 2008)*, 2008, pp. 157–  
7 160.
- 8 [65] D. A. Koninck, D. Briand, L. Guillot, U. Bley, V. Gass, and N. F. de Rooij, "Ignition and  
9 Combustion Behavior in Solid Propellant Microsystems Using Joule-Effect Igniters,"  
10 *Microelectromechanical Systems, Journal of*, vol. 20, no. 6, pp. 1259–1268, Dec. 2011.
- 11 [66] C. Ru, F. Wang, J. Xu, J. Dai, Y. Shen, Y. Ye, P. Zhu, and R. Shen, "Superior performance  
12 of a MEMS-based solid propellant microthruster (SPM) array with nanothermites,"  
13 *Microsystem Technologies*, vol. Online first, pp. 1–14, 2016.
- 14 [67] K. L. Zhang, S. K. Chou, S. S. Ang, and X. S. Tang, "A MEMS-based solid propellant  
15 microthruster with Au/Ti igniter," *Sensors and Actuators A: Physical*, vol. 122, no. 1, pp.  
16 113–123, 2005.
- 17 [68] K. Zhang, S. K. Chou, and S. Ang, "Investigation on the ignition of a MEMS solid  
18 propellant microthruster before propellant combustion," *Journal of Micromechanics and  
19 Microengineering*, vol. 17, pp. 322–332, 2007.
- 20 [69] A. London, A. Epstein, and J. Kerrebrock, "High-pressure bipropellant microrocket  
21 engine," *Journal of Propulsion and Power*, vol. 17, no. 4, pp. 780–787, 2001.
- 22 [70] K. D. Patel, M. S. Bartsch, M. H. McCrink, J. S. Olsen, B. P. Mosier, and R. W. Crocker,  
23 "Electrokinetic pumping of liquid propellants for small satellite microthruster applications,"  
24 *Sensors and Actuators B: Chemical*, vol. 132, no. 2, pp. 461–470, 2008.
- 25 [71] D. L. Hitt, C. M. Zakrzewski, and M. A. Thomas, "MEMS-based satellite micropropulsion  
26 via catalyzed hydrogen peroxide decomposition," *Smart Materials and Structures*, vol. 10,  
27 no. 6, p. 1163, 2001.
- 28 [72] P. Kundu, A. K. Sinha, T. K. Bhattacharyya, and S. Das, "MnO<sub>2</sub> Nanowire Embedded  
29 Hydrogen Peroxide Monopropellant MEMS Thruster," *Microelectromechanical Systems,  
30 Journal of*, vol. 22, no. 2, pp. 406–417, Apr. 2013.
- 31 [73] N. Miyakawa, W. Legner, T. Ziemann, D. Telitschkin, H.-J. Fecht, and A. Friedberger,  
32 "MEMS-based microthruster with integrated platinum thin film resistance temperature  
33 detector (RTD), heater meander and thermal insulation for operation up to 1,000°C,"  
34 *Microsystem Technologies*, vol. 18, no. 7–8, pp. 1077–1087, 2012.
- 35 [74] G. Taylor, "Disintegration of Water Drops in an Electric Field," *Proceedings of the Royal  
36 Society of London A: Mathematical, Physical and Engineering Sciences*, vol. 280, no. 1382,  
37 pp. 383–397, 1964.
- 38 [75] D. Courtney, S. Dandavino, and H. Shea, "Comparing Direct and Indirect Thrust  
39 Measurements from Passively Fed Ionic Electro spray Thrusters," *Journal of propulsion and  
40 power*, vol. 32, pp. 392–407, 2016.
- 41 [76] J. Xiong, Z. Zhou, D. Sun, and X. Ye, "Development of a MEMS based colloid thruster with  
42 sandwich structure," *Sensors and Actuators A: Physical*, vol. 117, no. 1, pp. 168–172, 2005.
- 43 [77] D. Courtney, S. Dandavino, and H. Shea, "Performance and Applications of Ionic  
44 Electro spray Micro-Propulsion Prototypes," in *AIAA SPACE 2015 Conference and  
45 Exposition*, 2015, p. 4672.
- 46 [78] S. Dandavino, C. Ataman, C. Ryan, S. Chakraborty, D. Courtney, J. Stark, and H. Shea,  
47 "Microfabricated electro spray emitter arrays with integrated extractor and accelerator

- 1 electrodes for the propulsion of small spacecraft,” *Journal of Micromechanics and*  
2 *Microengineering*, vol. 24, no. 7, p. 075011(13pp), 2014.
- 3 [79] D. Krejci, F. Mier-Hicks, R. Thomas, T. Haag, and P. Lozano, “Emission Characteristics of  
4 Passively Fed Electrospray Microthrusters with Propellant Reservoirs,” *Journal of*  
5 *Spacecraft and Rockets*, vol. Online first, pp. 1–12, Jan. 2017.
- 6 [80] R. Krpoun and H. Shea, “Integrated out-of-plane nanoelectrospray thruster arrays for  
7 spacecraft propulsion,” *Journal of Micromechanics and Microengineering*, vol. 19, no. 4, p.  
8 045019(10pp), 2009.
- 9 [81] S. P. Berg and J. L. Rovey, “Decomposition of a Double Salt Ionic Liquid Monopropellant  
10 on Heated Metallic Surfaces,” in *52nd AIAA/SAE/ASEE Joint Propulsion Conference*, 2016.
- 11 [82] S. P. Berg, J. L. Rovey, B. D. Prince, S. W. Miller, and R. J. Bemish, “Electrospray of an  
12 Energetic Ionic Liquid Monopropellant for Multi-Mode Micropropulsion Applications,” in  
13 *51st AIAA/SAE/ASEE Joint Propulsion Conference*, 2015.
- 14 [83] J. Bouwmeester and J. Guo, “Survey of worldwide pico- and nanosatellite missions,  
15 distributions and subsystem technology,” *Acta Astronautica*, vol. 67, no. 7–8, pp. 854–862,  
16 2010.
- 17 [84] G. P. Candini, F. Piergentili, and F. Santoni, “Miniaturized attitude control system for  
18 nanosatellites,” *Acta Astronautica*, vol. 81, no. 1, pp. 325–334, 2012.
- 19 [85] CubeSatShop.com, “CubeSatShop.” .
- 20 [86] M. Athayde Costa e Silva, D. Cordeiro Guerrieri, and A. Cervone, “Investigation of  
21 Innovative Thrust-Vector Control Techniques for Micro Propulsion Systems,” in *IAF 66th*  
22 *International Astronautical Congress*, 2015, p. 8.
- 23 [87] M.-H. Wu and P.-S. Lin, “Design, fabrication and characterization of a low-temperature  
24 co-fired ceramic gaseous bi-propellant microthruster,” *Journal of Micromechanics and*  
25 *Microengineering*, vol. 20, no. 8, p. 085026, 2010.
- 26 [88] A. Cervone, B. Zandbergen, D. C. Guerrieri, M. A. C. Silva, and H. van Zeijl, “Green  
27 Micro-Resistojet Research at Delft University of Technology: the New Frontiers of Cubesat  
28 Propulsion,” in *5th CEAS Air and Space Conference*, 2015.
- 29 [89] D. C. Guerrieri, M. A. C. Silva, B. Zandbergen, and A. Cervone, “Heater Chip with  
30 Different Microchannels Geometries for a Low Pressure Free Molecular Micro-Resistojet,”  
31 in *Space Propulsion 2016*, 2016.
- 32 [90] A. D. Ketsdever, R. H. Lee, and T. C. Lilly, “Performance testing of a microfabricated  
33 propulsion system for nanosatellite applications,” *Journal of Micromechanics and*  
34 *Microengineering*, vol. 15, no. 12, pp. 2254–2263, 2005.
- 35 [91] S. Shoji and M. Esashi, “Microflow devices and systems,” *Journal of Micromechanics and*  
36 *Microengineering*, vol. 4, no. 4, p. 157, 1994.
- 37 [92] C. Zhang, D. Xing, and Y. Li, “Micropumps, microvalves, and micromixers within {PCR}  
38 microfluidic chips: Advances and trends,” *Biotechnology Advances*, vol. 25, no. 5, pp. 483–  
39 514, 2007.
- 40 [93] S. Arestie, E. G. Lightsey, and B. Hudson, “Development of a modular, cold gas propulsion  
41 system for small satellite applications,” *Journal of Small Satellites*, vol. 1, no. 2, pp. 63–74,  
42 2012.
- 43 [94] T. Imken, T. Stevenson, and G. Lightsey, “Design and Testing of a Cold Gas Thruster for an  
44 Interplanetary CubeSat Mission,” *Journal of Small Satellites*, vol. 4, pp. 371–386, 2015.
- 45 [95] T. Stevenson and G. Lightsey, “Design and Characterization of a 3D-Printed Attitude  
46 Control Thruster for an Interplanetary 6U CubeSat,” in *30th Annual AIAA/USU Conference*  
47 *on Small Satellites*, 2016.

- 1 [96] D. L. Carroll, J. M. Cardin, R. L. Burton, G. F. Benavides, N. Hejmanowski, C. Woodruff,  
2 K. Bassett, D. King, J. Laystrom-Woodard, L. Richardson, C. Day, K. Hageman, and R.  
3 Bhandari, "Propulsion Unit for CubeSats (PUC)," in *Proceedings of the 62nd JANNAF*  
4 *Propulsion Meet. (7th Spacecr. Propulsion)*, 2015.
- 5 [97] S. Ciaralli, M. Coletti, and S. B. Gabriel, "Results of the qualification test campaign of a  
6 Pulsed Plasma Thruster for Cubesat Propulsion (PPTCUP)," *Acta Astronautica*, vol. 121,  
7 pp. 314–322, 2016.
- 8 [98] S. Ciaralli, M. Coletti, and S. B. Gabriel, "Performance and lifetime testing of a pulsed  
9 plasma thruster for Cubesat applications," *Aerospace Science and Technology*, vol. 47, pp.  
10 291–298, 2015.
- 11 [99] M. Coletti, S. Ciaralli, and S. B. Gabriel, "PPT Development for Nanosatellite Applications:  
12 Experimental Results," *IEEE Transactions on Plasma Science*, vol. 43, no. 1, pp. 218–225,  
13 Jan. 2015.
- 14 [100] M. Coletti, F. Guarducci, and S. B. Gabriel, "A micro {PPT} for Cubesat application:  
15 Design and preliminary experimental results," *Acta Astronautica*, vol. 69, no. 3–4, pp. 200–  
16 208, 2011.
- 17 [101] M. Coletti, R. Marques, and S. Gabriel, "Design of a Two-Stage PPT for Cubesat  
18 Application," in *Proceedings of the thirty-first international electric propulsion conference,*  
19 *Electric Rocket Propulsion Society, Ann Arbor, USA*, 2009.
- 20 [102] N. J. Hejmanowski, C. A. Woodruff, R. L. Burton, and D. L. Carroll, "CubeSat High  
21 Impulse Propulsion System (CHIPS)," in *Proceedings of the 62nd JANNAF Propulsion*  
22 *Meet. (7th Spacecr. Propulsion)*, 2015.
- 23 [103] Z. Khaji, L. Klintberg, D. Barbade, K. Palmer, and G. Thornell, "Alumina-based  
24 monopropellant microthruster with integrated heater, catalytic bed and temperature  
25 sensors," in *Journal of Physics: Conference Series*, 2016, vol. 757, no. 1.
- 26 [104] S. Kisaki, R. Muraoka, C. Huanjun, M. Tanaka, H. Tahara, and T. Wakizono, "Research and  
27 Development of Electrothermal Pulsed Plasma Thruster Systems onboard Osaka Institute of  
28 Technology PROITERES Nano-Satellites," in *33rd International Electric Propulsion*  
29 *Conference*, 2013.
- 30 [105] H. Leiter, B. Lotz, D. Feili, M. Tartz, H. Neumann, and D. M. Di Cara, "Design  
31 Development and Test of the RIT-AX Mini Ion Engine System," in *31st International*  
32 *Electric Propulsion Conference*, 2009.
- 33 [106] X. Liu, T. Li, Z. Li, H. Ma, and S. Fang, "Design, fabrication and test of a solid propellant  
34 microthruster array by conventional precision machining," *Sensors and Actuators A:*  
35 *Physical*, vol. 236, pp. 214–227, 2015.
- 36 [107] K. A. Polzin, T. E. Markusic, B. J. Stanojev, A. Dehoyos, Y. Raitses, A. Smirnov, and N. J.  
37 Fisch, "Performance of a low-power cylindrical Hall thruster," *Journal of propulsion and*  
38 *power*, vol. 23, no. 4, pp. 886–888, 2007.
- 39 [108] K. Sathiyathan, R. Lee, H. Chesser, C. Dubois, R. Stowe, R. Farinaccio, and S. Ringuette,  
40 "Solid Propellant Microthruster Design for Nanosatellite Applications," *Journal of*  
41 *Propulsion and Power*, vol. 27, no. 6, pp. 1288–1294, 2011.
- 42 [109] A. Smirnov, Y. Raitses, and N. Fisch, "Performance studies of miniaturized cylindrical and  
43 annular Hall thrusters," in *38th AIAA/ASME/SAE/ASEE Joint Propulsion Conference and*  
44 *Exhibit, Indianapolis, IN*, 2002.
- 45 [110] A. Szelecka, J. Kurzyna, D. Danilko, and S. Barral, "Liquid micro pulsed plasma thruster,"  
46 *Nukleonika*, vol. 60, no. 2, pp. 257–261, 2015.

- 1 [111] M. Tanaka, S. Kasaki, T. Ikeda, and H. Tahara, “Research and development of pulsed  
2 plasma thruster systems for nano-satellites at Osaka Institute of Technology,” in *Vehicle*  
3 *Power and Propulsion Conference (VPPC), 2012 IEEE*, 2012, pp. 517–522.
- 4 [112] M. Tsay, J. Frongillo, and J. Zwahlen, “Maturation of Iodine Fueled BIT-3 RF Ion Thruster  
5 and RF Neutralizer,” in *52nd AIAA/SAE/ASEE Joint Propulsion Conference, AIAA*  
6 *Propulsion and Energy Forum*, 2016.
- 7 [113] M. Tsay, J. Zwahlen, D. Lafko, C. Feng, and M. Robin, “Complete EM System  
8 Development for Busek’s 1U CubeSat Green Propulsion Module,” in *52nd*  
9 *AIAA/SAE/ASEE Joint Propulsion Conference, AIAA Propulsion and Energy Forum*, 2016.  
10