



Delft University of Technology

Analysis of Occupant Behaviours in Energy Efficiency Retrofitting Projects

Maghsoudi Nia, E.; Qian, QK; Visscher, H.J.

DOI

[10.3390/land11111944](https://doi.org/10.3390/land11111944)

Publication date

2022

Document Version

Final published version

Published in

Land

Citation (APA)

Maghsoudi Nia, E., Qian, QK., & Visscher, H. J. (2022). Analysis of Occupant Behaviours in Energy Efficiency Retrofitting Projects. *Land*, 11(11), Article 1944. <https://doi.org/10.3390/land11111944>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

Analysis of Occupant Behaviours in Energy Efficiency Retrofitting Projects

Elham Maghsoudi Nia *, Queena K. Qian and Henk J. Visscher

Faculty of Architecture and the Built Environment, Delft University of Technology, Julianalaan 134, 2628BL Delft, The Netherlands

* Correspondence: e.maghsoudinia@tudelft.nl; Tel.: +31-(0)61-337-00-64

Abstract: This review of studies into Energy Efficiency Retrofitting (EER) has shown the practice of EER to be a key factor in sustainability regeneration. Thus, the retrofitting practice itself (the way it is organised) has received increasing attention from both practitioners and researchers, and studies are now addressing some issues that are affecting the retrofit level of achievement. Most of the risks which lead to low retrofit development are related to owners. This paper aims highlight the role of the occupants in achieving the goals of EER. It is found that: a) the early involvement of occupants in the design and construction stage, b) mutual engagement, and c) an integral approach that involves the occupants are the key to motivate EER decisions from these same occupants. It follows that this involvement, including the demographic characteristics of the occupants, such as their culture, habits, preferences, awareness towards energy saving and socio-economic factors, are indeed effective in influencing the energy-related behaviours of these occupants. Moreover, other factors, such as space-heating behaviour, presence/absence of the occupants, control level of the equipment and window, and lighting control behaviour, are all effective factors in the energy performance of the buildings. Hence, socio-technical advancements, co-design processes and effective energy efficiency policies are recommended strategies to: a) improve occupants' behaviours; and b) increase their participation in EER projects.

Citation: Maghsoudi Nia, E.;

Qian, Q. K.; Visscher, H. J. Analysis of Occupant' Behaviours in Energy Efficiency Retrofitting Projects. *Land* **2022**, *11*, 1944. <https://doi.org/10.3390/land11111944>

Academic Editor: Thomas Panagopoulos

Received: 15 August 2022

Accepted: 10 October 2022

Published: 31 October 2022

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

Keywords: sustainable regeneration; occupant behaviours; energy efficiency retrofit; renovation participation; behavioural change

1. Introduction

In the context of housing regeneration, as with any construction project, the full involvement of the main practitioners is essential to achieve the project goals. Yet regeneration projects have their own characteristics, and in order to promote, implement and achieve sustainability in these projects, it is essential to determine the roles of the key players and the levels of their involvement. Generally, the interactions between the key players affect the general performance of the projects [1]. According to Afacan [2], regeneration processes are currently carried out with the insufficient involvement of all stakeholders and a deficiency in sustainability issues planning. Thus, the full engagement of the main actors in the project delivery processes leads to the successful implementation of sustainability deliverables for these projects [3].

The building energy renovation process is a part of sustainable urban regeneration and is an essential approach to reduce energy consumption. Yet many projects are facing failure, and the achievement of construction quality standards is not guaranteed after renovation. To improve the construction quality in building energy renovation projects, four factors have to be considered, namely:- (1) people; (2) materials; and equipment; (3) design; and (4) organization based on the quality management process [4]. The current stud-

ies [5] show that the effectiveness of energy-efficient retrofitting [6] depends on: (a) occupants and (b) building (and systems) characteristics. The interaction of building technology and the occupant affects energy consumption and health also [7]. However, most renovation initiatives, at least in Europe, have not considered occupant behaviours equally to other factors in the energy efficiency process and consequently fail to consider occupant behaviours as a risk to the achievement of satisfactory indoor environment quality (IEQ) and the occupants' own health [8]. Therefore, it is important to consider the interrelations of building design, indoor environmental quality and the occupant behaviours [9].

In recent years, a large number of publications concerning energy efficiency retrofitting (EER) have been published. While these studies have enriched the literature in this discipline, there is still a need for a more comprehensive understanding of the impact of people's behaviour on creating energy efficiency (EE) performance gaps in retrofitted buildings. Therefore, it is considered vitally important to examine, systematically, the literature relating to occupants' energy-related behaviours and their participation, in order to provide an effective understanding of the latest research findings in the discipline. In particular, there is a lack of a systematic review or awareness of people's participation and behaviours in energy efficiency retrofitted buildings (ERBs). Therefore, this study aims to demonstrate the latest research directions in this area of interest. For the fulfillment of the study aim, the following questions are addressed: (1) What factors affect energy-related behaviours and people's participation in EER projects?; (2) What kind of occupant behaviours affect the level of comfort and energy performance of the ERBs?; (3) How to improve the technical performance of ERBs based on the occupant behaviours?; and (4) How people can harmoniously adopt the technologies? These four research questions (RQs) will lead to identifying the effective factors for creating energy performance gaps or low comfort levels and health risks in ERBs; investigating the different factors that affect the occupant energy-related behaviours and their awareness of EE; and a set of recommendations and the strategies to increase occupant participation. In response to the RQs, the literature on relevant topics has been retrieved and classified into six main themes, which are described in the following sections. Table 1 shows the connection between the RQs and the relevant themes and topics.

Table 1. The relation of research questions to the themes and topics.

Research Question	Themes	Topics
RQ1	Energy consumption patterns of occupants including people's attitude towards energy saving and people's comfort perception	Comfort perception of occupants
		Energy conservation behaviours
RQ2	People's behaviours factors in EER	Energy-related occupant behaviours
		People's behaviours in ERBs
		Energy performance gap
RQ3	Types of the EER and the systems	Renovation measures
	IEQ health risks in EER	Types of the ERBs and their performance
		Health risks in ERBs
RQ4	Promoting strategies for energy saving EER management (barriers and drivers)	Occupant well-being in ERBs
		Approaching behavioural change
		Behavioural model
		Occupants' participation in the design process

2. An In-Depth Analysis of Occupant Behaviours in EER Research

The various energy consumptions of occupants are based on demographic characteristics, lifestyles, limitations, different levels of comfort perception, attitude and awareness towards EE and socio-economic factors. These factors are effective in emerging different energy-related behaviours of occupants including heating behaviour, movements of the occupants, control of the systems, and window and lighting control behaviour. In order

to change the attitudes of occupants towards EE, improve occupants' behaviours and increase their participation in EER, behavioural changes, socio-technical advancements, co-design process engagement, and energy efficiency policy are suggested strategies. For instance, user interaction systems such as monitoring systems, feedback loops to a design process, efficient appliances, a more image-based manual, and responsible innovation would be effective in reducing occupants' uncooperative behaviours in ERBs. The study classified the literature regarding the six themes in response to four research questions. These themes are described in the following sections.

2.1. Types of the EER and the Systems

'Low-energy houses' (LEHs), 'passive houses' (PHs), or 'zero-energy houses' (ZEHs) are general terms for different types of EER. 'Low energy' refers to buildings with the aim of less energy usage without any special requirements. While, 'passive' houses, have to fulfill specific requirements, including a maximum end-energy use for space heating and limited primary energy demand for all end-users. 'Zero energy' generally refers to net zero energy, which means a building where the net energy consumed over one year is equal to the amount of energy produced on-site [10]. However, both passive houses and NZEBs mainly have to meet their energy demands by building-integrated renewable energy sources [11]. The different types of EER buildings [10, 12] and their components in both passive houses and NZEBs [12-15], the factors that have to be considered during retrofitting [13, 16-20], and the energy-saving measures (ESMs) [18, 20] are studied by many scholars.

Energy-efficient or high-efficiency buildings are not included only in new construction, and existing buildings can also be renovated as per the high-energy efficiency standard [21, 22]. Energy efficiency renovations can contribute significantly to reducing energy consumption and achieving the EU and national energy efficiency targets [23]. EER of residential buildings is a key measure in the contribution of energy conservation and improves the life quality level of people as well [24]. Retrofitting approaches have to emphasize technical-material changes in order to focus equally on researching and potentially changing the energy-related purposes and actual activities of the occupants of ERBs. The concept of energy culture is a useful investigation to analyze the household energy demand and the indoor environment. Three key elements of energy culture have been described in the study by Rau, Moran [25] and the results show that in order to achieve actual and long-term energy consumption reductions, it is crucial to consider an integrated approach that combines technology-aided changes and reforming of occupants' attitudes and practices, simultaneously [25].

Since the interactions have two players including the human and the building (systems); hence, the occupants have to be considered in the design process of control systems and building infrastructure. In terms of occupants, it is suggested to understand their comfort perceptions, emotions, behaviours and awareness qualitatively and quantitatively, as well as control levels, and attitudes towards energy, needs, and habits. Whereas, on the building and systems side, elements such as usability, quality, affordances and layout have to be considered [26, 27]. As the building systems, environment and occupant are interrelated, particularly in the indoor environment, every action, behaviour or habit exercised by the individual can affect the environment, and subsequently, the environment influences the action and the behaviour of the person. Consequently, it is essential to understand the components better through an integrated analysis of occupant behaviours and the indoor environment. In terms of occupants' behaviours, their preferences and needs, profiles, intentions (locus of control, emotions, attitudes, social factors); habits; and health and comfort status have to be considered. On the indoor environment side, occupants are exposed to the positive and negative stressors that influence their behaviours [28, 29]. Therefore, interdisciplinary studies are required to study the interactions between occupants' behaviours, preferences and needs towards energy, comfort, health,

energy-efficient systems, and the indoor environment. Moreover, it is required to integrate knowledge from the indoor environment, energy, behaviour, and design sciences. Learning from real case studies, from the design step to early occupation leads to understanding the drivers of energy efficiency, IEQ, and health in residential buildings [30, 31]. The energy performance gap generated by the buildings' characteristics, technologies, and occupants' behaviours is shown in Table 2.

Table 2. The effective factors on energy performance gap related to the buildings' characteristics and occupants' behaviours.

Renovation Measure	Effective Factors	Technology Gap	Reference(s)
Building envelope	The energy efficiency of the building before the energy renovation, type of building, income level of occupants, occupancy	Thermal renovations	[20, 32, 33]
Building services	Indoor temperature and hours of heating system operation	Enhancing heating installations	[18, 32, 33]
	Comprehensible ventilation system interfaces and functioning to users	Ventilation system adapting the building design to users' needs	[34, 35]
User interaction systems	Residents' satisfaction (control, usability, suitability for varying preferences, financial security, comfort, and security)	Monitoring system	[35]
		Feedback loops to a design process that could include interface design and adaptation steps	[36]
		Efficient appliance	[37]
		A more image-based manual	[36]
		Responsible innovation	

2.2. Energy Consumption Patterns of Occupants

The energy consumption of buildings shows a strong relationship with the occupants' activities. A key factor in controlling building energy usage is a lack of understanding of occupant behaviours. The critical review paper of Harputlugil and de Wilde [38] has identified the existing gaps in the previous research on energy-related occupant behaviours. They stated that the majority of the research focuses on technical aspects rather than socio-economic issues [38]. Moreover, "comfort" and "health" are ignored in the previous studies, and both are rarely measured. Consequently, occupant behaviours, preferences and needs are understudied and required to be integrated into the research and development of retrofitting measures [30]. Reducing energy consumption, despite the installation of energy retrofitting technologies, is partially related to the occupants (behaviours, preferences, needs, awareness) and to some extent is also due to technical issues. The factors identified in prior studies [26, 27, 30, 39] which are effective on behaviours of the occupants in energy consumption are shown in Figure 1.

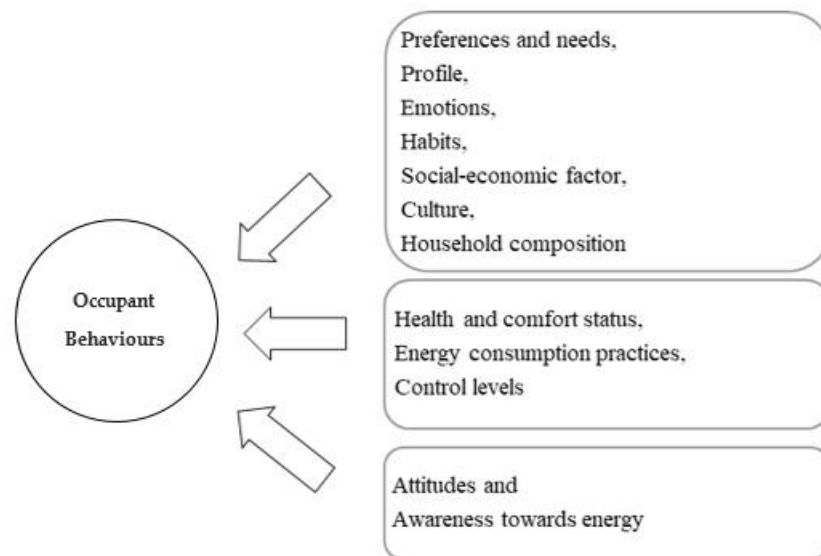


Figure 1. Effective factors on occupant behaviours energy use [26,27,30,39].

The study of Santin, Itard [40] showed that some occupant behaviours is defined by the type of house or HVAC systems, and consequently, the effect of occupant characteristics might be larger than expected, since these specify the type of residence [40]. Gardner and Stern [41] have defined two types of behaviours (efficiency and curtailment behaviours) related to energy conservation in their studies. Window-opening behaviour is one sort of energy-related behaviours that has been discussed in prior studies, extensively. According to the literature findings, five categories of significant variables influencing window opening behaviour for residential buildings include physiological factors (e.g., age and gender), psychological factors (e.g., perceived illumination and temperature preference), social factors (e.g., smoking behaviour and presence at home), contextual factors (e.g., dwelling type, room type, room orientation, ventilation type, heating system, time of day and season) and natural environmental factors (e.g., outdoor temperature, outdoor air quality, indoor relative humidity, solar radiation, wind speed, CO₂ concentrations and indoor temperature) [42]. Lighting control behaviour is an attractive topic for some researchers as well [43, 44]. Occupancy, time of the day, and occupants' movement within the building are effective in the lighting behaviour of occupants [45]. Space heating/cooling behaviour is another type of behaviour that has been mainly discussed [42]. The case study of houses in the Netherlands has highlighted the main factors that are effective on heating behaviour and energy consumption, such as occupants' thermal comfort perception, occupancy, time of the day, thermostat setting, ventilation system, and heating type [46].

Consequently, the varied energy consumption of occupants is based on their lifestyles (different attitudes, habits, clothes, beliefs, and culture), limitations (age, gender, vulnerability, metabolic heat, thermal sensitivity, and safety), and indoor environment quality (different aspects of comfort levels for thermal, acoustic, indoor air quality, and visual) [38]. The research team van den Brom, Hansen [47] have studied the impacts of the house type and the building characteristics on the energy consumption of occupants. For example, the occupants' impact is greater for energy-efficient houses than for energy-inefficient dwellings [47]. Furthermore, occupants with a high income can save more energy than occupants with a low income. Moreover, residential buildings with employed occupants make more use of improved building installations than those occupied by unemployed occupants. However, it is not found that the number of occupants per house has a significant effect [20].

Pothitou, Kolios [48] concluded that surveys that were conducted based on qualitative research; [49-55] revealed consumption patterns and routines in daily occupants' life. It can be summarized as: occupants' unawareness of annual energy and water consumption; a gap in the public's awareness of global warming and the effect of heating and cooling homes on climate change [56]; no consumers' environmental behavioural change despite environmental issues concerns [57] due to the initial cost of energy-efficient products and the lack of public funds as the main barriers [58]; and no new behaviour adoption despite awareness of household or practices to reduce energy consumption due to the occupants' habits. Therefore, the lack of occupants' awareness of energy-saving behaviours and their daily practices causes an energy performance gap, which is described in the following section.

Research on occupant behaviours has been concentrated on various specific behaviours, such as window opening behaviour, lighting control behaviour and space heating/cooling. This indicates that there is a need to further understand occupants' behaviours regarding energy use in buildings.

Furthermore, a systematic framework will lead to model and capturing the interaction between occupants and building energy systems from different perspectives through an integrated evaluation system. Additionally, there are insufficient data on behaviour profiles and energy use in actual buildings. The socio-economic context can contribute to the understanding of occupant behaviours and enlighten approaches to encourage more energy-efficient behaviours.

Likewise, more research is required to integrate behavioural factors with energy policy making. The role of occupant behaviours in the energy efficiency policy of buildings is a large research gap. Policymakers would improve building energy efficiency policy by recognizing occupant behaviour's impact on the effectiveness of relevant policies [42].

As a consequence, the effective factors influencing the energy efficiency of the buildings that need occupants' participation, as well, are shown in Table 3.

Table 3. Effective factors on energy efficiency renovation with respect to the occupants' participation.

Effective factors		References
Socio-demographic characteristics	Education level	[16, 59]
	Gender and age	[40, 59, 60]
	Income rate	[20, 40]
	Occupation	
Behavioural factors	Transaction cost barrier:	[16]
	Finding a trustworthy expert/contractor for exterior renovations	
	Cost determination for interior renovations	
	Finding methods to improve the energy efficiency of renovations	[16, 20]
	Support and advice of the expert:	
Source of information and instructions for maintenance and installation		

2.3. People's Behavioural Factors in EER

As aforementioned, energy-related occupants' behaviours depend on their comfort, and mainly, on their thermal comfort [61]. People's behaviours can be categorized into three types: 1) physiological adaptation; 2) psychological adaptation; and 3) behavioural adaptation [62]. These three adaptations are related to the local weather climate and the social and cultural environment. Behavioural adaptation is the main factor in which individuals adjust their body heat balance by changing themselves or the environment to keep thermal comfort. In order to avoid discomfort, people change themselves through clothing adjustments, or in other ways, such as posture [63] or activity changes. People change the environment to maintain thermal comfort by opening windows, drawing blinds, or changing their location to a more comfortable space. Mechanical systems usage such as heating, cooling, or fans are examples of adaptive behaviours [64]. As an example, the

findings of the case study of Bonte, Thellier [61] on an office show that the major behaviour on total energy demand is the actions on set-point temperature, blinds, and lights. Moreover, the main behaviour on thermal comfort is changing the set-point temperature, clothing insulation, and blinds. Particularly, the occupants' habit cause (mis)use of the control systems of the comfort providing appliances, by some activities including radiator control (adjusting thermostat settings), opening/closing windows, dimming/switching lights, shade control (pulling up/down blinds), turning on/off HVAC systems and movement between spaces [30, 42, 65]. Furthermore, behavioural adaptations, for instance, clothing adjustments, drinks consumption and human metabolic rate changes, directly affect an individual's comfort and building energy consumption, subsequently. Therefore, both direct and indirect drivers, at the individual, local, whole-space or zonal levels affect the building energy consumption differently [65].

Many scholars studied window, shades and blinds control behaviour [66, 67]. The most important issue between perceived IEQ and outdoors is the building envelope [68]. Window operation provides occupants with the desired indoor thermal and air quality conditions through adjustments to air movements throughout the building. Additionally, as the building envelope is being more thermally efficient, ventilation and air infiltrations as a result of window opening are increasing their impacts on energy use, and, accordingly, becoming the main source of thermal loss of the heat balance mechanism. According to Humphrey's adaptive principle, if a change happens to cause discomfort, people respond in a way that tends to restore their comfort [69]. Windows, shades, and blinds allow occupants to control and adjust thermal and visual comfort levels. Similarly, the position and frequency of interaction with portable shading and blinds affect the building energy consumption, peak loads and visual and thermal comfort. Appropriate windows, shades, and blind interactions provide an energy-efficient strategy. However, the contrary interactions easily lead to energy waste [70, 71]. Stakeholders have predicted that the residents are key players in the success of the project. For instance, when the heating system is on, the residents need to keep the windows closed. Furthermore, some residents may open windows for ventilation, which results in more energy consumption in winter, while balanced ventilation with heat recovery provides fresh air [36].

Some scholars have studied space heating/cooling behaviour. The interaction of occupants with building systems is effective in the total energy consumption of buildings. Hence, occupant behaviours is the most important cause of uncertainty in energy use prediction [72]. Therefore, to link the gap between actual and expected energy consumption, there is a need to understand occupant-building interactions [73]. Langevin, Wen [74] revealed that individual heating/cooling device usage increases the thermostat set-point enhancing thermal comfort, whereas they reduce the overall energy consumption. Energy consumption can vary according to the HVAC control strategy, with the main physical-behavioural services including ventilation, thermostat set-point, and indoor thermal environment [75, 76]. Some of the main effective factors on heating loads include occupant mode, thermostat set-point and heated area [61, 77]. Classifying the occupant as either an active, medium, or passive user, and connecting occupant behavioural characteristics to heating set-point preferences, influences the indoor thermal environment and energy consumption [78, 79]. Technical solutions that limit the interaction of occupants with technology are a strong solution to reduce wasted energy. Though, it is recommended that the thermal control perception and higher occupant satisfaction, designate a solution that required occupant-building interactions [80]. Regarding the conceptual framework on the habitual behavioural change proposed by Pothitou, Kolios [48], and the prior research [40, 42, 45, 46, 81], the study has developed the conceptual framework of occupants' energy-related behaviours (Figure 2). Table 4 has listed the effective factors on energy-related behaviours of occupants in residential buildings.

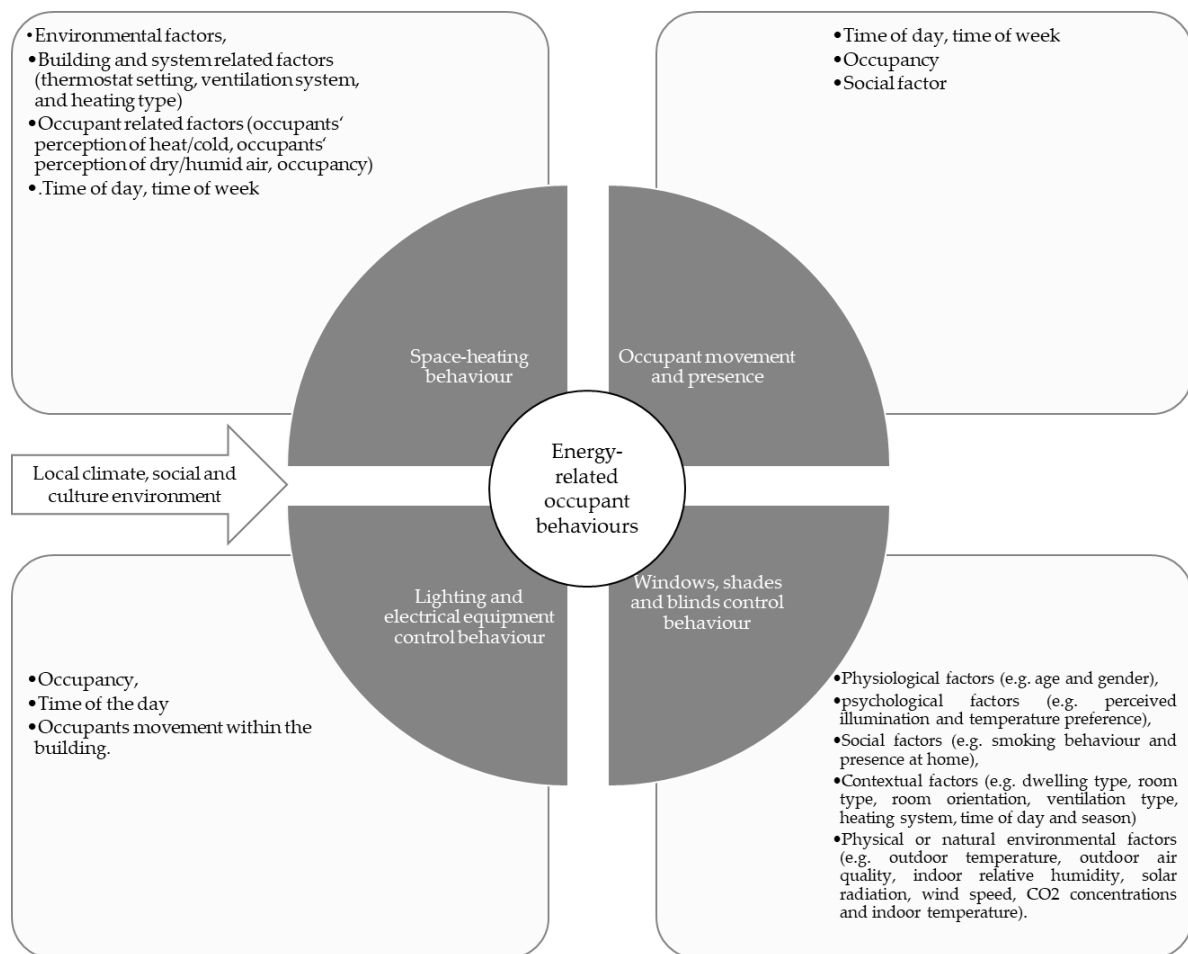


Figure 2. The conceptual framework of occupant energy-related behaviours [40,42,45,46,81].

Table 4. Energy-related behaviours of the occupants in residential buildings.

Energy-Related Behaviours			
Effective Factors	Behaviours	Activity	References
Occupants' perception of heat/cold, occupants' perception of dry/humid air, occupancy, time of the day, thermostat setting, ventilation system and heating type	Space Heating/Cooling Behaviour	Radiator control (adjusting thermostat settings) Turning on/off HVAC systems	[30, 42, 46, 65]
Physiological factors, psychological factors, social factors, contextual factors and natural environmental factors	Window Opening Behaviour	Opening/closing windows	
Occupancy, time of the day and occupants' movement within the building	Lighting Control Behaviour	Dimming/switching lights Shade control (pulling up/down blinds)	[30, 45, 65]
Clothing adjustments, the consumption of drinks and changes in the human metabolic rate	Behavioural adaptations		[65]
Individual occupancy patterns	Occupants' Movement and Presence	Movement between spaces	[40, 82-84]

2.4. IEQ Health Risks in EER

The essential components of high-efficiency buildings include the building envelope, HVAC system with filtration, and controls for indoor air quality [12]. The mechanical HVAC system is significantly effective in environmental improvement by allowing wind flow between the rooms and consequently moisture reduction and thermal comfort level improvement, as well [85]. Some studies [86, 87] show that sufficient air exchanges miti-

gate humidity, and reduce user exposure to other indoor pollutants such as carbon dioxide and bio effluents. Moreover, high-efficiency buildings can reduce indoor exposure to air pollutants by up to 80%, which results in health and productivity benefits [88], the energy-retrofitted buildings cause risks for IEQ and consequently for the health and comfort of occupants [30]. The results show that the retrofitting of the buildings can lead to complaints about mould growth, built-up of pollutants (including radon), lack of control, thermal comfort stress (feeling too cold, too warm, or draught), noise annoyance from heating and ventilation installations and a range of health problems. The underperformance of mechanical ventilation, heat recovery systems, and air source heat pumps is often a consequence of deficient commissioning and maintenance, and poor occupant control due to complexity [30]. Since, filtration in the HVAC system prevents outdoor pollutants intrusion into indoors, changing and cleaning filters plays a major role in the performance of HVAC. Moreover, exposure to indoor air pollution is detrimental to occupant mental health [89, 90]. Building-related illnesses (BRIs) vary in residential buildings due to exposure time and occupancy level. Thus, spending more time in residential buildings exposes the occupants to BRIs such as asthma and cancer (Table 5) [91, 92]. Usually, occupants use the systems differently than expected [93] and renovators are concerned more with the level of comfort than with the maintenance of ESMs [16]. To avoid BRIs, the support and advice of the expert and source of information and instructions for maintenance and installation are recommended [16, 20].

Table 5. The building and occupants' behaviours in health level.

Effective Factors	How	Building-Related Illnesses
Mechanical HVAC system	Installing HVAC systems and issues within (ducts, filters, maintenance, noise)	-Risk of health problems, particularly for airways, skin, and eyes [30]
	The HVAC system causes an inflow of outdoor pollutants [86]	-Increasing indoor moisture and leads to a higher level of microbial growth and dust mites [94-98]
Building envelope	Air-tighter and more thermally insulated [12] and inadequate air exchange	-Diseases include asthma, cold and flu, lung cancer and cardiovascular diseases especially ischemic heart disease [86, 99, 100]

2.5. EER Management

As aforementioned, the majority of the energy retrofitting performance risks are related to owners and contractors. The low awareness, poor cooperation and opportunistic behaviours of owners negatively affect project commencement and performance. A case study in China suggested increasing information disclosure and provision in retrofitting projects globally. Firstly, the provision of information on energy retrofitting technologies and systems in the early phase of projects causes the plan modification reduction and minimization of owners' dissatisfaction in the consequent stages. Secondly, the provision of information on technical staff leads to owners' trust enhancement in on-site construction and subsequently improves their cooperation. Thirdly, increasing the knowledge of the owner about maintenance results in maintaining good performance of retrofitting measures. Lastly, information provision on designers' and constructors' technologies is effective in the rational decision-making of the government and homeowners [24].

Moreover, the provision of adequate and effective information decreases owners' risk perception. Increasing owners' self-awareness of active cooperation is an important factor to manage homeowner-related risks. Responsibility sharing (e.g., motivating owners to accept some retrofitting costs) leads to minimizing the barriers from the owner's side during the construction phase [101]. Information provision on retrofitting profits and facilities is more effective in enhancing owners' cooperation. Good cooperation of owners contributes to smooth project implementation [102]. There is also another case study in China that confirms that the successful implementation of energy-efficient renovation is

directly related to homeowners’ participation. Inadequate owners’ participation causes difficulties in both the performance and funding of the projects. The results show that although most homeowners are optimistic about government-led renovation and are interested in participation, the processing system is not well-designed to let them be fully involved. It can be concluded that designing a targeted renovation and participation strategy is essential to maximize effective communication. The study concluded that the perfect process is never achieved in practice in renovation projects and so there is a deviation between homeowners’ expectations and the actuality. Hence, the participation procedure has to be enhanced [103].

In terms of governmental actions, there is a need to consider the integration of building quality information and the owners’ understandability of technology information; thus, the government needs to consider the information distribution on retrofitting benefits in the public domain. Additionally, the government might also need to create pilot retrofitting projects. In the meantime, the communication and interactions between pilot projects and the local community need to be strengthened to make retrofitting information available to homeowners. Likewise, the government should provide more detailed quality information on the potentially renovated buildings to certify the safety of retrofitting and reduce owners’ concerns about the safety during the retrofitting. Failure to allay their concerns may subsequently reduce their interest in cooperation. Furthermore, the government should pay more attention to setting up energy consumption databases for residential buildings and making them available to the public. The government also should encourage personalized retrofitting projects, properly. In order to perform retrofitting projects based on homeowners’ actual needs within the financial limits of the government, a good understanding of the everyday life of the homeowners is required. It is likewise recommended that the government should make available the technical information in an easily understood form by owners [102]. Consequently, risk perception and retrofitting information are effective for the homeowners’ cooperation. However, other factors which are effective on homeowners’ cooperation are ignored, for example, each homeowner’s reputation amongst the neighbours [104], and personal norms referring to the feelings of ethical obligations [105]. The contextual and technological gaps related to the occupants’ behaviours in EER are shown in Figure 3 [106–109].

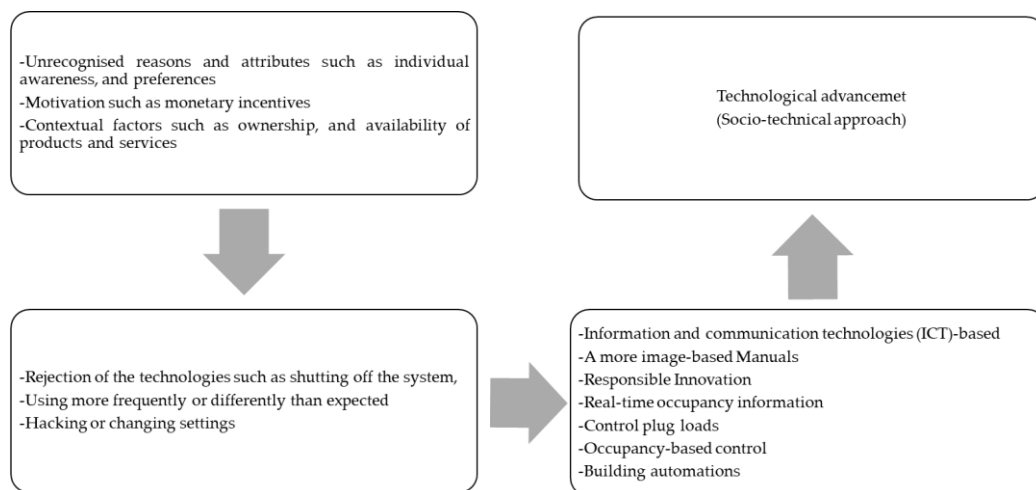


Figure 3. The contextual and technology gaps related to the occupants’ behaviours in EER [106–109].

Some strategies in order to increase occupants’ participation in EER projects and to reduce their uncooperative behaviours in creating energy performance gaps, as suggested by different scholars are as follows: informing residents through more image-based manuals Boess [36], responsible innovation [36, 110], mutual engagement [36, 111], integration

(communication with residents before and after renovation) [93, 112-114], building automation and energy-intelligent buildings [115-118], real-time occupancy information [37, 115, 119-123], occupants' participation in the design process [35, 93, 112, 113, 124-130]. In terms of occupants' participation in the design process, Akotia and Opoku [131] suggest the client's representative to achieve the client's requirements. The client's representative, is one of the effective practitioners in the construction project delivery processes that represents the client's interests in the project [131]. Figure 4 shows the importance of occupants' participation in the design process regarding the prior studies [93, 127].

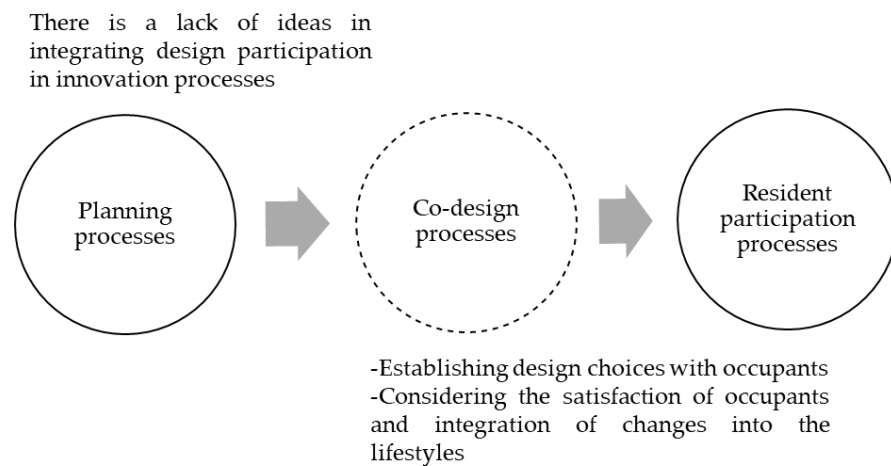


Figure 4. The importance of occupants' participation in the design process [93,127].

2.6. Promoting Strategies for Energy Saving

The literature on the influencing human behaviours factors is very broad; it has been defined as "enormous" [132] and "bordering on the unmanageable" [133]. The prior frameworks demonstrate that an individual's sustainable or environmental behaviours are influenced by environmental attitudes and government policies and subsidies. It is also found that there is a strong relationship between environmental attitudes and energy-saving behaviours but the second is not at all influenced by government policies or subsidies [134]. Most of the previous environmental research on the theory of reasoned action and intentional behaviour shows that there is a gap between environmental beliefs or attitudes and behaviours [135, 136]. It means that positive environmental beliefs or attitudes do not necessarily translate into environmental behaviours [136]. However, the results of the study by Gadenne, Sharma [134] show that certain environmental beliefs and attitudes would appear to directly influence environmental behaviours [134]. Therefore, behavioural models are necessary to understand what consumers do, and why they do so. Different models and frameworks are presented by Barbu, Griffiths [137] and Pothitou, Kolios [48], the motivation–opportunity–ability (MOA) model of consumer behaviour, by Ölander and Thøgersen [138], and the Fogg behaviour model Fogg [139]. The study of Barbu, Griffiths [137] has classified the different approaches to change the behaviours to adopt technologies in a harmonious way including increasing occupants' participation and cooperation, feedback measures, community-based initiatives, breaking or creating habits initiatives, the role of learning and knowledge, the role of the game and financial incentives. Each of these strategies has been described in the prior studies [16, 24, 55, 93, 101-103, 134, 137, 140-153], and has been added to the developed model by Barbu, Griffiths [137]. The main factors influencing consumer behaviours and the emergence of consumption practices based on the developed model of Barbu, Griffiths [137] are shown in Figure 5. This model is also adapted from the Needs Opportunities Abilities (NOA model) [154], described in Darton's 'Methods and Models' [133].

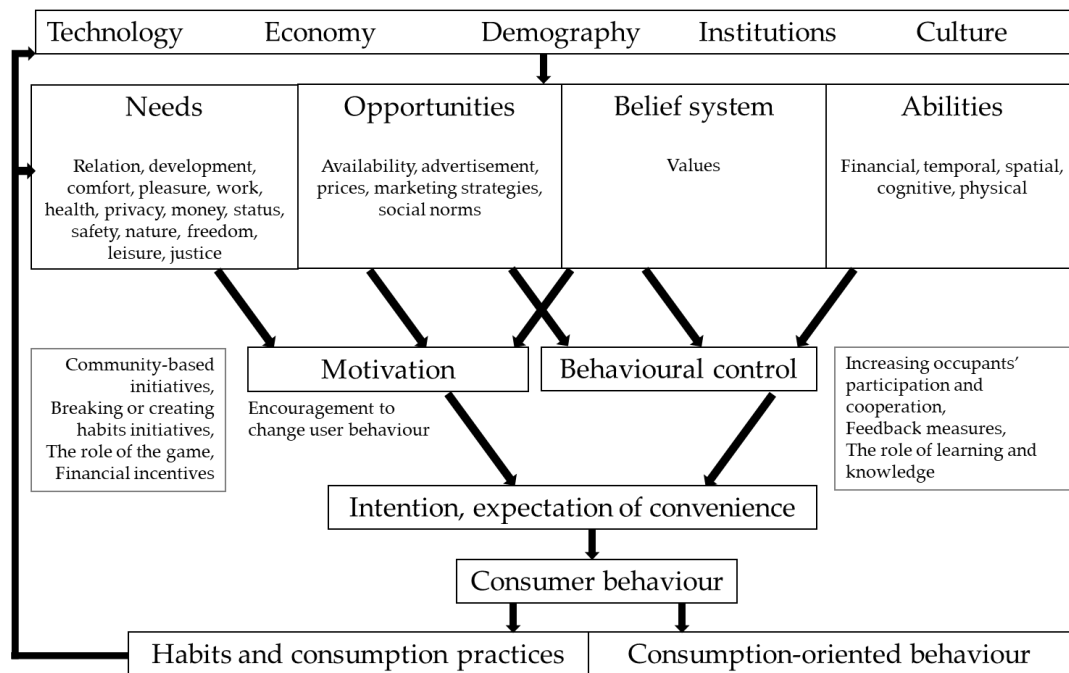


Figure 5. Model of effective factors on the emergence of consumer behaviours (Adapted from the NOA model [133,137,154]).

In order to change user behaviours, some of the EU measures in the residential sectors include smart meter usage, and information campaigns or encouragement [137, 155]. Considerably, the decline in energy consumption has been motivated by both technical improvements in devices and by the increase in the price of energy, which is why the effectiveness of policies that influence and change consumer behaviours should not be ignored [137]. As aforementioned, several studies have been conducted to measure the occupant behaviours impacts on energy consumption [48, 65, 77, 115, 156]. Energy efficiency is related to particular technologies to reduce energy consumption by achieving the maximum provision of services without the individual's behavioural involvement. By comparison, energy conservation relates to the changes which people make to their own energy consumption [142, 157]. However, Barr, Gilg [158] agrees that energy-saving behaviours involve consumption-oriented behaviours and habitual behaviours which cannot be separated conceptually.

Currently, a number of implications are highlighted, such as detailed occupant models in energy simulation tools, feedback systems and information campaigns to improve unfavorable occupant behaviours [159]. Moreover, the report of EEA forms a set of recommendations and analyses on the following topics including feedback measures, energy audits, community-based initiatives, structural factors, and the rebound effect [137]. According to previous literature, the effective factors of each driver have been added to the 'Model of Community Empowerment' developed by Darnton [133]. The developed framework of changing behaviours and increasing participation of people in EER projects based on the Darnton [133] model is reproduced from CLG [160], and is presented in Figure 6.

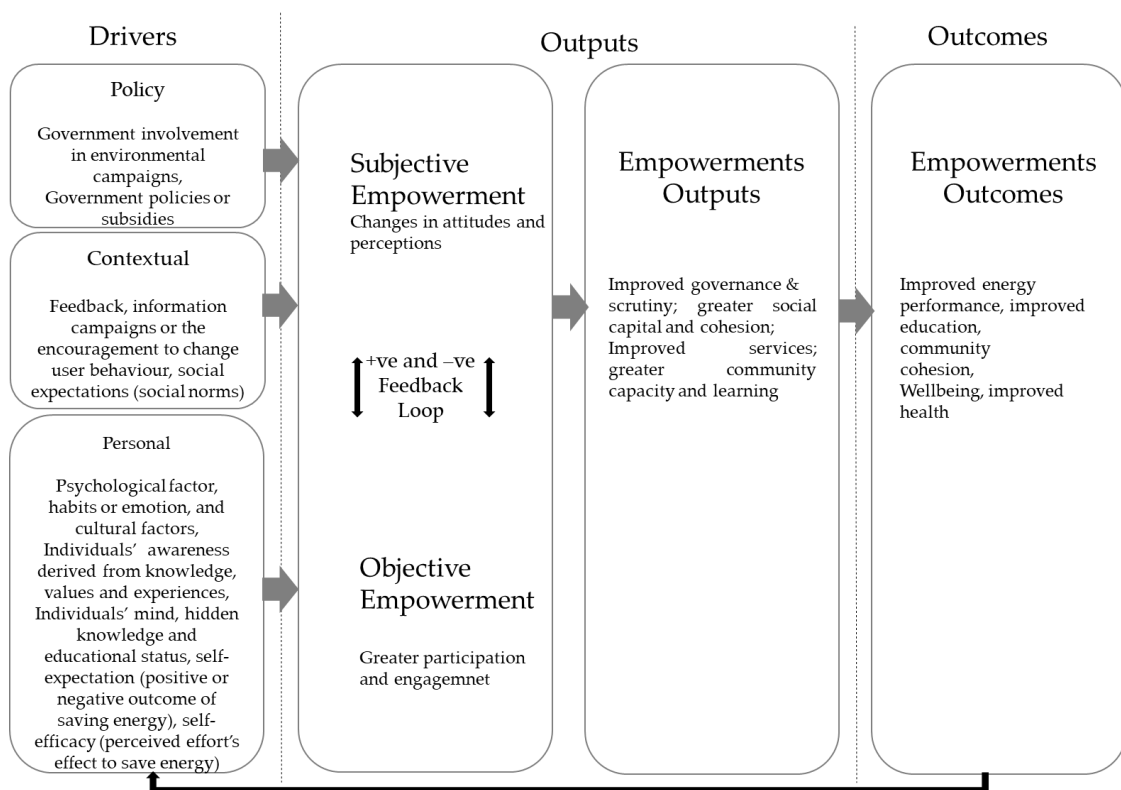


Figure 6. The framework of changing behaviours and increasing people's participation in EER projects [133,160].

3. Theoretical Framework

According to the in-depth literature review, the study concludes with the theoretical framework, which shows the process of emerging occupants' behaviours in ERBs and the strategies to improve occupants' behaviours and participation in ERBs (Figure 7). The effective factors of occupants' behaviours including buildings' characteristics and the used technologies, individual characteristics, and contextual factors are detected as the effective factors in occupants' behaviours in ERBs and the EER process. To improve energy performance and reduce occupants' behaviours, and increase residents' participation, some strategies concluded according to the aforementioned studies and frameworks include improvement of technologies, making energy efficiency policies, involving occupants' in the design process and behavioural changes.

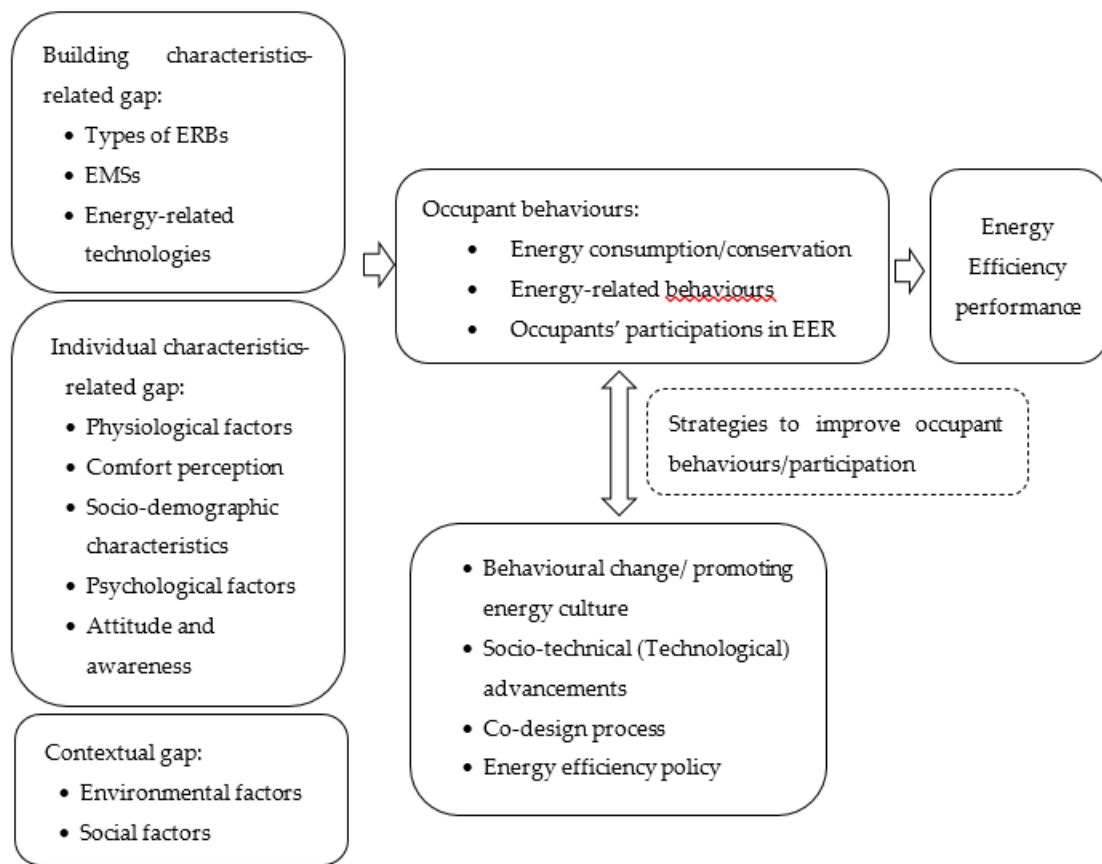


Figure 7. The theoretical framework of the study.

4. Conclusions

This review has found that the involvement of the occupants in EER projects is an important factor in the delivery of the project outcomes. The interactions between the occupants and the building ultimately influence the overall energy performance of the ERBs. This paper aims to investigate the behaviours and participation of the occupants in the EER projects and to analyze the awareness and behaviours of the occupants in involving and achieving the EE. The study has reviewed the literature mostly recently published in the area of improving the occupants' behaviours and socio-technical aspects that can potentially enable ERBs to deliver better energy performance. The results are divided into two stages of the participation process including the early step and post-occupancy participation. In response to the research questions, the following results are derived:

1. Demographic characteristics of the occupants, culture, habits and energy practices, health and comfort preferences, awareness towards energy saving and socio-economical factors are effective on energy-related behaviours and occupants' participation in the EER projects.
2. Space-heating behaviour, movements and presence of the occupants, control level of the equipment, window, shading and lighting control behaviour are effective factors in the level of comfort and energy performance of the ERBs.
3. "Socio-technical" advancement including information and communication technologies (ICT)-based, a more image-based manual, responsible innovation, real-time occupancy information, control plug loads, occupancy-based control and building automation is effective on technology performance of ERBs in regard to the occupants' behaviours.

4. People can harmoniously adopt the technologies through behavioural change or by promoting an energy culture. Socio-technical advancements, a co-design process, and an effective energy efficiency policy are some strategies to improve occupants' behaviours or increase their participation in EER projects.

The findings show that in the early stage of the process, the current approaches are completed with urgency and they seek to minimize occupant involvement by shortening the process and the period of actual renovation. Therefore, in their urgency, they might underestimate the occupant's consent and need for trust-building which will promote the desired energy performance. This level of occupant satisfaction and building performance can only be obtained if the residents are participating in the design process [124]. The study recommends the client's representative as one of the most effective practitioners in the EER project delivery in response to the client's needs [131]. Moreover, mutual engagement and an integral approach are suggested to involve residents. Additionally, most of the risks which lead to low retrofit developments are related to owners and contractors, including retrofit awareness, cooperation performance, opportunism, professional expertise, construction management, safety management and maintenance, all of which generally occur at the on-site construction stage. The low awareness, poor cooperation and opportunistic behaviours of owners negatively affect project commencement and performance [24]. Therefore, increasing occupant participation and cooperation and the role of learning and knowledge can help in achieving behavioural change. Behavioural change, co-design process, socio-technical improvement, and energy efficiency policy-making are the recommended strategies in order to improve occupant behaviours and participation in ERBs. Further research is recommended to (a) study EER issues extensively in the design, construction and maintenance process, (b) develop an integrated manual for occupants' involvement with the aim of EE performance improvement and (c) increase occupants' participation and cooperation through the role of learning and knowledge which can help in achieving the behavioural change and enhance the effectiveness of EER approaches.

Author Contributions: Writing—original draft preparation, E.M.N.; writing—review and editing, Q.K.Q.; supervision, H.J.V. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Data Availability Statement: Not applicable.

Conflicts of Interest: The authors declare no conflicts of interest.

References

1. Takim, R. The Management of Stakeholders' Needs and Expectations in the Development of Construction Project in Malaysia. *Mod. Appl. Sci.* **2009**, *3*, 167, <https://doi.org/10.5539/mas.v3n5p167>.
2. Afacan, Y. Resident satisfaction for sustainable urban regeneration, In *Proceedings of the Institution of Civil Engineers-Municipal Engineer*; Thomas Telford Ltd.: London, UK, 2015, pp. 220–234.
3. Mathur, V.N.; Price, A.D.; Austin, S. Conceptualizing stakeholder engagement in the context of sustainability and its assessment. *Constr. Manag. Econ.* **2008**, *26*, 601–609, <https://doi.org/10.1080/01446190802061233>.
4. Qi, Y.; Qian, Q.K.; Meijer, F.M.; Visscher, H.J. Unravelling Causes of Quality Failures in Building Energy Renovation Projects of Northern China: Quality Management Perspective. *J. Manag. Eng.* **2021**, *37*, 04021017, [https://doi.org/10.1061/\(asce\)me.1943-5479.0000888](https://doi.org/10.1061/(asce)me.1943-5479.0000888).
5. van den Brom, P. Energy in dwellings: A comparison between theory and practice. In *A+ BE| Architecture and the Built Environment*; Delft University of Technology: Delft, The Netherlands, 2020, pp. 1–258.
6. Garssen, J.; Harmsen, C.; De Beer, J. The effect of the summer 2003 heat wave on mortality in the Netherlands. *Eurosurveillance* **2005**, *10*, 13–14, <https://doi.org/10.2807/esm.10.07.00557-en>.
7. Zhao, D.; McCoy, A.P.; Du, J.; Agee, P.; Lu, Y. Interaction effects of building technology and resident behavior on energy consumption in residential buildings. *Energy Build.* **2017**, *134*, 223–233.
8. Santangelo, A.; Tondelli, S. Occupant behaviour and building renovation of the social housing stock: Current and future challenges. *Energy Build.* **2017**, *145*, 276–283, <https://doi.org/10.1016/j.enbuild.2017.04.019>.

9. Šujanová, P.; Rychtáriková, M.; Mayor, T.S.; Hyder, A. A Healthy, Energy-Efficient and Comfortable Indoor Environment, a Review. *Energies* **2019**, *12*, 1414, <https://doi.org/10.3390/en12081414>.
10. Mlecnik, E.; Schütze, T.; Jansen, S.; de Vries, G.; Visscher, H.; van Hal, A. End-user experiences in nearly zero-energy houses. *Energy Build.* **2012**, *49*, 471–478, <https://doi.org/10.1016/j.enbuild.2012.02.045>.
11. Kurnitski, J. Technical definition for nearly zero energy buildings. *REHVA J.* **2013**, *50*, 22–28.
12. Chatterjee, S.; Ürge-Vorsatz, D. Measuring the productivity impacts of energy-efficiency: The case of high-efficiency buildings. *J. Clean. Prod.* **2021**, *318*, 128535. <https://doi.org/10.1016/j.jclepro.2021.128535>.
13. Zhou, Z.; Zhang, S.; Wang, C.; Zuo, J.; He, Q.; Rameezdeen, R. Achieving energy efficient buildings via retrofitting of existing buildings: A case study. *J. Clean. Prod.* **2016**, *112*, 3605–3615, <https://doi.org/10.1016/j.jclepro.2015.09.046>.
14. Schnieders, J.; Hermelink, A. CEPHEUS results: Measurements and occupants' satisfaction provide evidence for Passive Houses being an option for sustainable building. *Energy Policy* **2006**, *34*, 151–171, <https://doi.org/10.1016/j.enpol.2004.08.049>.
15. Sun, X.; Gou, Z.; Lau, S.S.-Y. Cost-effectiveness of active and passive design strategies for existing building retrofits in tropical climate: Case study of a zero energy building. *J. Clean. Prod.* **2018**, *183*, 35–45, <https://doi.org/10.1016/j.jclepro.2018.02.137>.
16. Ebrahimigharehbaghi, S.; Qian, Q.K.; Meijer, F.M.; Visscher, H.J. Transaction costs as a barrier in the renovation decision-making process: A study of homeowners in the Netherlands. *Energy Build.* **2020**, *215*, 109849, <https://doi.org/10.1016/j.enbuild.2020.109849>.
17. Energie, W. *Saving Energy in the Housing Stock: Insights from the Energy Module Woon 2018*; ABF Research: Delft, Netherlands, 2019.
18. Filippidou, F.; Nieboer, N.; Visscher, H. Effectiveness of energy renovations: A reassessment based on actual consumption savings. *Energy Effic.* **2018**, *12*, 19–35, <https://doi.org/10.1007/s12053-018-9634-8>.
19. Li, Q.; Zhang, L.; Zhang, L.; Wu, X. Optimizing energy efficiency and thermal comfort in building green retrofit. *Energy* **2021**, *237*, 121509.
20. van den Brom, P.; Meijer, A.; Visscher, H. Actual energy saving effects of thermal renovations in dwellings—Longitudinal data analysis including building and occupant characteristics. *Energy Build.* **2019**, *182*, 251–263, <https://doi.org/10.1016/j.enbuild.2018.10.025>.
21. Chel, A.; Janssens, A.; De Paepe, M. Thermal performance of a nearly zero energy passive house integrated with the air–air heat exchanger and the earth–water heat exchanger. *Energy Build.* **2015**, *96*, 53–63, <https://doi.org/10.1016/j.enbuild.2015.02.058>.
22. Ürge-Vorsatz, D.; Khosla, R.; Bernhardt, R.; Chan, Y.C.; Vérez, D.; Hu, S.; Cabeza, L.F. Advances toward a net-zero global building sector. *Annu. Rev. Environ. Resour.* **2020**, *45*, 227–269.
23. Ebrahimigharehbaghi, S.; Filippidou, F.; Brom, P.V.D.; Qian, Q.K.; Visscher, H.J. Analysing the Energy Efficiency Renovation Rates in the Dutch Residential Sector. *E3S Web Conf.* **2019**, *111*, 03019, <https://doi.org/10.1051/e3sconf/201911103019>.
24. Jia, L.; Qian, Q.K.; Meijer, F.; Visscher, H. Exploring key risks of energy retrofit of residential buildings in China with transaction cost considerations. *J. Clean. Prod.* **2021**, *293*, 126099, <https://doi.org/10.1016/j.jclepro.2021.126099>.
25. Rau, H.; Moran, P.; Manton, R.; Goggins, J. Changing energy cultures? Household energy use before and after a building energy efficiency retrofit. *Sustain. Cities Soc.* **2019**, *54*, 101983, <https://doi.org/10.1016/j.scs.2019.101983>.
26. Nembrini, J.; Lalanne, D. Human-Building Interaction: When the Machine Becomes a Building. In *IFIP Conference on Human-Computer Interaction*; Springer: Cham, Switzerland, 2017; pp. 348–369, https://doi.org/10.1007/978-3-319-67684-5_21.
27. Ortiz, M.A.; Bluysen, P.M. Developing home occupant archetypes: First results of mixed-methods study to understand occupant comfort behaviours and energy use in homes. *Build. Environ.* **2019**, *163*, 106331. <https://doi.org/10.1016/j.buildenv.2019.106331>.
28. Ajzen, I. The theory of planned behavior. In *Handbook of Theories of Social Psychology*; Lange, A.W.K.P.A.M., Higgin, E.T., Eds.; Sage: London, UK, 2012; volume 1, pp. 438–459.
29. Bluysen, P.M. Towards an integrated analysis of the indoor environmental factors and its effects on occupants. *Intell. Build. Int.* **2019**, *12*, 199–207, <https://doi.org/10.1080/17508975.2019.1599318>.
30. Ortiz, M.; Itard, L.; Bluysen, P.M. Indoor environmental quality related risk factors with energy-efficient retrofitting of housing: A literature review. *Energy Build.* **2020**, *221*, 110102, <https://doi.org/10.1016/j.enbuild.2020.110102>.
31. Ortiz, M.A.; Kurvers, S.R.; Bluysen, P.M. A review of comfort, health, and energy use: Understanding daily energy use and wellbeing for the development of a new approach to study comfort. *Energy Build.* **2017**, *152*, 323–335, <https://doi.org/10.1016/j.enbuild.2017.07.060>.
32. van der Bent, H.S.; Visscher, H.J.; Meijer, A.; Mouter, N. The energy performance of dwellings of non-profit housing associations in the Netherlands 2017–2018. *IOP Conf. Series Earth Environ. Sci.* **2019**, *329*, 012035, <https://doi.org/10.1088/1755-1315/329/1/012035>.
33. Ebrahimigharehbaghi, S.; Qian, Q.K.; Meijer, F.M.; Visscher, H.J. Homeowners' Decisions Towards Energy Renovations—Critical Stages and Sources of Information. *E3S Web Conf.* **2019**, *111*, 03014. <https://doi.org/10.1051/e3sconf/201911103014>.
34. Boess, S. Framing Resident Acceptance of Sustainable Renovation. In *Proceedings of the Pin-C 2015: 4th Participatory Innovation Conference*, Hague, The Netherlands, 18–20 May 2015; The Hague University of Applied Sciences and University of Southern Denmark: Hague, The Netherlands, 2015.
35. Konstantinou, T.; Klein, T.; Santin, O.G.; Boess, S.; Silvester, S. An integrated design process for a zero-energy refurbishment prototype for post-war residential buildings in the Netherlands. In *SASBE 2015, Proceedings of the 5th CIB International Conference*

- on Smart and Sustainable Built Environments, Pretoria, South Africa, 9–11 December 2015; CIB (International Council for Research and Innovation in Building and Construction): Kanata, ON, Canada, 2015.
36. Boess, S.U. Design contributions to building technology: Goals, interfaces and responsiveness. In Proceedings of the Design Society: International Conference on Engineering Design, Delft, The Netherlands, 5–8 August 2019; Cambridge University Press: Cambridge, UK, 2019; pp. 3211–3220.
 37. Guerra-Santin, O.; Bosch, H.; Budde, P.; Konstantinou, T.; Boess, S.; Klein, T.; Silvester, S. Considering user profiles and occupants' behaviour on a zero energy renovation strategy for multi-family housing in the Netherlands. *Energy Effic.* **2018**, *11*, 1847–1870, <https://doi.org/10.1007/s12053-018-9626-8>.
 38. Harputlugil, T.; de Wilde, P. The interaction between humans and buildings for energy efficiency: A critical review. *Energy Res. Soc. Sci.* **2021**, *71*, 101828.
 39. D'Oca, S.; Chen, C.-F.; Hong, T.; Belafi, Z. Synthesizing building physics with social psychology: An interdisciplinary framework for context and occupant behavior in office buildings. *Energy Res. Soc. Sci.* **2017**, *34*, 240–251, <https://doi.org/10.1016/j.erss.2017.08.002>.
 40. Santin, O.G.; Itard, L.; Visscher, H. The effect of occupancy and building characteristics on energy use for space and water heating in Dutch residential stock. *Energy Build.* **2009**, *41*, 1223–1232, <https://doi.org/10.1016/j.enbuild.2009.07.002>.
 41. Gardner, G.T.; Stern, P.C. *Environmental Problems and Human Behavior*; Allyn & Bacon: Boston, MA, USA, 1996.
 42. Zhang, Y.; Bai, X.; Mills, F.P.; Pezzey, J.C. Rethinking the role of occupant behavior in building energy performance: A review. *Energy Build.* **2018**, *172*, 279–294, <https://doi.org/10.1016/j.enbuild.2018.05.017>.
 43. Heydarian, A.; Carneiro, J.P.; Gerber, D.; Becerik-Gerber, B. Immersive virtual environments, understanding the impact of design features and occupant choice upon lighting for building performance. *Build. Environ.* **2015**, *89*, 217–228, <https://doi.org/10.1016/j.buildenv.2015.02.038>.
 44. Heydarian, A.; Pantazis, E.; Carneiro, J.P.; Gerber, D.; Becerik-Gerber, B. Lights, building, action: Impact of default lighting settings on occupant behaviour. *J. Environ. Psychol.* **2016**, *48*, 212–223, <https://doi.org/10.1016/j.jenvp.2016.11.001>.
 45. Zhou, X.; Yan, D.; Hong, T.; Ren, X. Data analysis and stochastic modeling of lighting energy use in large office buildings in China. *Energy Build.* **2015**, *86*, 275–287, <https://doi.org/10.1016/j.enbuild.2014.09.071>.
 46. Majcen, D.; Itard, L.; Visscher, H. Statistical model of the heating prediction gap in Dutch dwellings: Relative importance of building, household and behavioural characteristics. *Energy Build.* **2015**, *105*, 43–59, <https://doi.org/10.1016/j.enbuild.2015.07.009>.
 47. Brom, P.V.D.; Hansen, A.R.; Gram-Hanssen, K.; Meijer, A.; Visscher, H. Variances in residential heating consumption—Importance of building characteristics and occupants analysed by movers and stayers. *Appl. Energy* **2019**, *250*, 713–728, <https://doi.org/10.1016/j.apenergy.2019.05.078>.
 48. Pothitou, M.; Kolios, A.; Varga, L.; Gu, S. A framework for targeting household energy savings through habitual behavioural change. *Int. J. Sustain. Energy* **2014**, *35*, 686–700, <https://doi.org/10.1080/14786451.2014.936867>.
 49. Abrahamse, W.; Steg, L.; Vlek, C.; Rothengatter, T. The effect of tailored information, goal setting, and tailored feedback on household energy use, energy-related behaviors, and behavioral antecedents. *J. Environ. Psychol.* **2007**, *27*, 265–276, <https://doi.org/10.1016/j.jenvp.2007.08.002>.
 50. Dowd, A.; Ashworth, P.; Carr-Cornish, S.; Stenner, K. EnergyMark: Empowering individual Australians to reduce their energy consumption. *Energy Policy* **2012**, *51*, 264–276, <https://doi.org/10.1016/j.enpol.2012.07.054>.
 51. Fahy, F.; Davies, A. Home improvements: Household waste minimisation and action research. *Resour. Conserv. Recycl.* **2007**, *52*, 13–27, <https://doi.org/10.1016/j.resconrec.2007.01.006>.
 52. Gram-Hanssen, K. Consuming technologies—developing routines. *J. Clean. Prod.* **2008**, *16*, 1181–1189.
 53. Grønhøj, A. Communication about consumption: A family process perspective on 'green' consumer practices. *J. Consum. Behav. Int. Res. Rev.* **2006**, *5*, 491–503.
 54. Jensen, J.O. Measuring consumption in households: Interpretations and strategies. *Ecol. Econ.* **2008**, *68*, 353–361, <https://doi.org/10.1016/j.ecolecon.2008.03.016>.
 55. Wood, G.; Newborough, M. Dynamic energy-consumption indicators for domestic appliances: Environment, behaviour and design. *Energy Build.* **2003**, *35*, 821–841, [https://doi.org/10.1016/s0378-7788\(02\)00241-4](https://doi.org/10.1016/s0378-7788(02)00241-4).
 56. Steg, L. Promoting household energy conservation. *Energy Policy* **2008**, *36*, 4449–4453, <https://doi.org/10.1016/j.enpol.2008.09.027>.
 57. Tsarenko, Y.; Ferraro, C.; Sands, S.; McLeod, C. Environmentally conscious consumption: The role of retailers and peers as external influences. *J. Retail. Consum. Serv.* **2013**, *20*, 302–310, <https://doi.org/10.1016/j.jretconser.2013.01.006>.
 58. Backlund, S.; Thollander, P.; Palm, J.; Ottosson, M. Extending the energy efficiency gap. *Energy Policy* **2012**, *51*, 392–396, <https://doi.org/10.1016/j.enpol.2012.08.042>.
 59. Hansen, A.R.; Madsen, L.V.; Knudsen, H.N.; Gram-Hanssen, K. Gender, age, and educational differences in the importance of homely comfort in Denmark. *Energy Res. Soc. Sci.* **2019**, *54*, 157–165, <https://doi.org/10.1016/j.erss.2019.04.004>.
 60. Liao, H.-C.; Chang, T.-F. Space-heating and water-heating energy demands of the aged in the US. *Energy Econ.* **2002**, *24*, 267–284, [https://doi.org/10.1016/s0140-9883\(02\)00014-2](https://doi.org/10.1016/s0140-9883(02)00014-2).
 61. Bonte, M.; Thellier, F.; Lartigau, B. Impact of occupant's actions on energy building performance and thermal sensation. *Energy Build.* **2014**, *76*, 219–227.

62. Roaf, S.; Nicol, F.; Humphreys, M.; Tuohy, P.G.; Boerstra, A. Twentieth century standards for thermal comfort: Promoting high energy buildings. *Arch. Sci. Rev.* **2010**, *53*, 65–77, <https://doi.org/10.3763/asre.2009.0111>.
63. Raja, I.A.; Nicol, F. A technique for recording and analysis of postural changes associated with thermal comfort. *Appl. Ergon.* **1997**, *28*, 221–225, [https://doi.org/10.1016/s0003-6870\(96\)00036-1](https://doi.org/10.1016/s0003-6870(96)00036-1).
64. Nicol, J.F.; Humphreys, M.A. A stochastic approach to thermal comfort-occupant behavior and energy use in buildings/discussion. *ASHRAE Trans.* **2004**, *110*, 554.
65. Hong, T.; Taylor-Lange, S.C.; D'Oca, S.; Yan, D.; Corgnati, S.P. Advances in research and applications of energy-related occupant behavior in buildings. *Energy Build.* **2016**, *116*, 694–702, <https://doi.org/10.1016/j.enbuild.2015.11.052>.
66. Wagner, A.; Gossauer, E.; Moosmann, C.; Gropp, T.; Leonhart, R. Thermal comfort and workplace occupant satisfaction—Results of field studies in German low energy office buildings. *Energy Build.* **2007**, *39*, 758–769, <https://doi.org/10.1016/j.enbuild.2007.02.013>.
67. de Dear, R.; Brager, G.S. Developing an adaptive model of thermal comfort and preference. *Final. Rep. ASHRAE* **1997**, *104*, RP-884.
68. Raja, I.A.; Nicol, J.F.; McCartney, K.J.; Humphreys, M.A. Thermal comfort: Use of controls in naturally ventilated buildings. *Energy Build.* **2001**, *33*, 235–244, doi:10.1016/s0378-7788(00)00087-6.
69. Humphreys, M. *Field Studies of Thermal Comfort Compared and Applied*; Building Research Station: Garston, UK, 1976; Voume 44.
70. Schakib-Ekbatan, K.; Çakıcı, F.Z.; Schweiker, M.; Wagner, A. Does the occupant behavior match the energy concept of the building?—Analysis of a German naturally ventilated office building. *Build. Environ.* **2015**, *84*, 142–150, <https://doi.org/10.1016/j.buildenv.2014.10.018>.
71. Li, N.; Li, J.; Fan, R.; Jia, H. Probability of occupant operation of windows during transition seasons in office buildings. *Renew. Energy* **2015**, *73*, 84–91, <https://doi.org/10.1016/j.renene.2014.05.065>.
72. Hoes, P.-J.; Hensen, J.; Loomans, M.; de Vries, B.; Bourgeois, D. User behavior in whole building simulation. *Energy Build.* **2009**, *41*, 295–302, <https://doi.org/10.1016/j.enbuild.2008.09.008>.
73. D'Oca, S.; Hong, T. A data-mining approach to discover patterns of window opening and closing behavior in offices. *Build. Environ.* **2014**, *82*, 726–739, <https://doi.org/10.1016/j.buildenv.2014.10.021>.
74. Langevin, J.; Wen, J.; Gurian, P.L. Including Occupants in Building Performance Simulation: Integration of an Agent-Based Occupant Behavior Algorithm with EnergyPlus. In Proceedings of the ASHRAE/IBPSAUSA Building Simulation Conference, Atlanta, GA, USA, 10–12 September 2014; pp. 10–12.
75. Tanner, R.A.; Henze, G.P. Quantifying the Impact of Occupant Behavior in Mixed Mode Buildings. *AEI 2013* **2013**, 246–255. <https://doi.org/10.1061/9780784412909.024>.
76. Galvin, R. Targeting 'behavers' rather than behaviours: A 'subject-oriented' approach for reducing space heating rebound effects in low energy dwellings. *Energy Build.* **2013**, *67*, 596–607.
77. de Meester, T.; Marique, A.-F.; De Herde, A.; Reiter, S. Impacts of occupant behaviours on residential heating consumption for detached houses in a temperate climate in the northern part of Europe. *Energy Build.* **2013**, *57*, 313–323, <https://doi.org/10.1016/j.enbuild.2012.11.005>.
78. Fabi, V.; Andersen, R.V.; Corgnati, S.P. Influence of occupant's heating set-point preferences on indoor environmental quality and heating demand in residential buildings. *HVACR Res.* **2013**, *19*, 635–645.
79. D'Oca, S.; Fabi, V.; Corgnati, S.P.; Andersen, R.K. Effect of thermostat and window opening occupant behavior models on energy use in homes. *Build. Simul.* **2014**, *7*, 683–694, <https://doi.org/10.1007/s12273-014-0191-6>.
80. Day, J.K.; Gunderson, D.E. Understanding high performance buildings: The link between occupant knowledge of passive design systems, corresponding behaviors, occupant comfort and environmental satisfaction. *Build. Environ.* **2015**, *84*, 114–124, <https://doi.org/10.1016/j.buildenv.2014.11.003>.
81. Wei, S.; Jones, R.; de Wilde, P. Driving factors for occupant-controlled space heating in residential buildings. *Energy Build.* **2014**, *70*, 36–44, <https://doi.org/10.1016/j.enbuild.2013.11.001>.
82. D'Oca, S.; Hong, T. Occupancy schedules learning process through a data mining framework. *Energy Build.* **2015**, *88*, 395–408, <https://doi.org/10.1016/j.enbuild.2014.11.065>.
83. Aerts, D.; Minnen, J.; Glorieux, I.; Wouters, I.; Descamps, F. A method for the identification and modelling of realistic domestic occupancy sequences for building energy demand simulations and peer comparison. *Build. Environ.* **2014**, *75*, 67–78, <https://doi.org/10.1016/j.buildenv.2014.01.021>.
84. Ryan, T.; Viperman, J.S. Incorporation of scheduling and adaptive historical data in the sensor-utility-network method for occupancy estimation. *Energy Build.* **2013**, *61*, 88–92.
85. Li, Y.; Leung, G.; Tang, J.; Yang, X.; Chao, Y.H.C.; Lin, Z.; Lu, W.-Z.J.; Nielsen, P.V.; Niu, J.; Qian, H.; et al. Role of ventilation in airborne transmission of infectious agents in the built environment? a multidisciplinary systematic review. *Indoor Air* **2007**, *17*, 2–18, <https://doi.org/10.1111/j.1600-0668.2006.00445.x>.
86. Asikainen, A.; Carrer, P.; Kephelopoulous, S.; Fernandes, E.D.O.; Wargocki, P.; Hänninen, O. Reducing burden of disease from residential indoor air exposures in Europe (HEALTHVENT project). *Environ. Heal.* **2016**, *15*, 61–72, <https://doi.org/10.1186/s12940-016-0101-8>.
87. WHO. *Ambient Air Pollution: A Global Assessment of Exposure and Burden of Disease*; WHO: Geneva, Switzerland, 2016.
88. Bonetta, S.; Bonetta, S.; Mosso, S.; Sampò, S.; Carraro, E. Assessment of microbiological indoor air quality in an Italian office building equipped with an HVAC system. *Environ. Monit. Assess.* **2010**, *161*, 473–483.

89. Apte, M.G.; Fisk, W.J.; Daisey, J.M. Associations Between Indoor CO₂ Concentrations and Sick Building Syndrome Symptoms in U.S. Office Buildings: An Analysis of the 1994–1996 BASE Study Data. *Indoor Air* **2000**, *10*, 246–257, <https://doi.org/10.1034/j.1600-0668.2000.010004246.x>.
90. Zabiegala, B.; Partyka, M.; Gawronska, A.; Wasilewska, A.; Namiesnik, J. Screening of volatile organic compounds as a source for indoor pollution. *Int. J. Environ. Heal.* **2007**, *1*, 13, <https://doi.org/10.1504/ijenvh.2007.012222>.
91. Crook, B.; Burton, N. Indoor moulds, Sick Building Syndrome and building related illness. *Fungal Biol. Rev.* **2010**, *24*, 106–113, <https://doi.org/10.1016/j.fbr.2010.05.001>.
92. Kreiss, K. Building-related illness. *Prev. Occup. Dis. Inj.* **2005**, *6*, 34.
93. Boess, S. Design Participation in Sustainable Renovation and Living. In *Living Labs*; Springer: Cham, Switzerland, 2016; pp. 205–226, https://doi.org/10.1007/978-3-319-33527-8_16.
94. Chen, Y.; Shen, H.; Smith, K.R.; Guan, D.; Chen, Y.; Shen, G.; Liu, J.; Cheng, H.; Zeng, E.Y.; Tao, S. Estimating household air pollution exposures and health impacts from space heating in rural China. *Environ. Int.* **2018**, *119*, 117–124, <https://doi.org/10.1016/j.envint.2018.04.054>.
95. Fernandes, E.; Jantunen, M.; Carrer, P.; Seppanen, O.; Harrison, P.; Kephelopoulos, S. Co-ordination action on indoor air quality and health effects. *Indoor Air* **2009**, 685.
96. Fisk, W.J.; Rosenfeld, A.H. Estimates of Improved Productivity and Health from Better Indoor Environments. *Indoor Air* **1997**, *7*, 158–172, <https://doi.org/10.1111/j.1600-0668.1997.t01-1-00002.x>.
97. Mondal, D.; Paul, P. Effects of indoor pollution on acute respiratory infections among under-five children in India: Evidence from a nationally representative population-based study. *PLoS ONE* **2020**, *15*, e0237611, <https://doi.org/10.1371/journal.pone.0237611>.
98. Nagendra, S.M.S.; Harika, P.S. Indoor air quality assessment in a school building in Chennai City, India. *Air Pollut. XVIII* **2010**, *136*, 275–286, <https://doi.org/10.2495/air100241>.
99. Jones, A.P. Indoor air quality and health. *Atmos. Environ.* **1999**, *33*, 4535–4564.
100. Redlich, C.A.; Sparer, J.; Cullen, M.R. Sick-building syndrome. *Lancet* **1997**, *349*, 1013–1016.
101. Jia, L.; Qian, Q.K.; Meijer, F.; Visscher, H. Stakeholders’ Risk Perception: A Perspective for Proactive Risk Management in Residential Building Energy Retrofits in China. *Sustainability* **2020**, *12*, 2832, <https://doi.org/10.3390/su12072832>.
102. Jia, L.; Qian, Q.K.; Meijer, F.; Visscher, H. How information stimulates homeowners’ cooperation in residential building energy retrofits in China. *Energy Policy* **2021**, *157*, 112504, <https://doi.org/10.1016/j.enpol.2021.112504>.
103. Ma, J.; Qian, Q.K.; Visscher, H.; Song, K. Homeowners’ Participation in Energy Efficient Renovation Projects in China’s Northern Heating Region. *Sustainability* **2021**, *13*, 9037, <https://doi.org/10.3390/su13169037>.
104. Zundel, S.; Stieß, I. Beyond Profitability of Energy-Saving Measures — Attitudes Towards Energy Saving. *J. Consum. Policy* **2011**, *34*, 91–105, <https://doi.org/10.1007/s10603-011-9156-7>.
105. Kastner, I.; Stern, P.C. Examining the decision-making processes behind household energy investments: A review. *Energy Res. Soc. Sci.* **2015**, *10*, 72–89, <https://doi.org/10.1016/j.erss.2015.07.008>.
106. Biying, Y.; Zhang, J.; Fujiwara, A. Analysis of the residential location choice and household energy consumption behavior by incorporating multiple self-selection effects. *Energy Policy* **2012**, *46*, 319–334.
107. Wada, K.; Akimoto, K.; Sano, F.; Oda, J.; Homma, T. Energy efficiency opportunities in the residential sector and their feasibility. *Energy* **2012**, *48*, 5–10, <https://doi.org/10.1016/j.energy.2012.01.046>.
108. Yu, B.; Zhang, J.; Fujiwara, A. Representing in-home and out-of-home energy consumption behavior in Beijing. *Energy Policy* **2011**, *39*, 4168–4177, <https://doi.org/10.1016/j.enpol.2011.04.024>.
109. Scott, K.; Bakker, C.; Quist, J. Designing change by living change. *Des. Stud.* **2012**, *33*, 279–297, <https://doi.org/10.1016/j.destud.2011.08.002>.
110. Stilgoe, J.; Owen, R.; Macnaghten, P. Developing a framework for responsible innovation. *Res. Policy* **2013**, *42*, 1568–1580, <https://doi.org/10.1016/j.respol.2013.05.008>.
111. Light, A.; Akama, Y. The human touch: Participatory practice and the role of facilitation in designing with communities. In Proceedings of the 12th Participatory Design Conference, Roskilde, Denmark, 12–16 August 2012; pp. 61–70.
112. Breukers, S.; van Summeren, L.; Mourik, R. Project bob (bewoners ontmoeten bouwers) eerst proces, dan prestatie. *Uitgebr. Samenvatting.(First Process Perform.)* **2014**, 2015, 31.
113. Dijkstra, A.; Brouwer, J. *Bewonerscommunicatie Bij Duurzame Woningverbetering*; Aeneas: Boxtel, The Netherlands, 2010.
114. Pronk, M. Versnelling010—Acceleration in Rotterdam. In Proceedings of the Symposium NeZer, Herzelia, Israel, 29 May 2014.
115. Nguyen, T.A.; Aiello, M. Energy intelligent buildings based on user activity: A survey. *Energy Build.* **2013**, *56*, 244–257, <https://doi.org/10.1016/j.enbuild.2012.09.005>.
116. So, A.T.; Wong, A.C.; Wong, K. A new definition of intelligent buildings for Asia. *Facilities* **1999**, *17*, 485–491, <https://doi.org/10.1108/02632779910293488>.
117. Wong, J.; Li, H.; Wang, S. Intelligent building research: A review. *Autom. Constr.* **2005**, *14*, 143–159, <https://doi.org/10.1016/j.autcon.2004.06.001>.
118. Page, J.; Robinson, D.; Morel, N.; Scartezzini, J.-L. A generalised stochastic model for the simulation of occupant presence. *Energy Build.* **2007**, *40*, 83–98, <https://doi.org/10.1016/j.enbuild.2007.01.018>.
119. ASHRAE. *American Society of Heating, Refrigerating and Air Conditioning Engineers*; Routledge: Atlanta, GA, USA, 1989.

120. Harle, R.K.; Hopper, A. The potential for location-aware power management. In Proceedings of the 10th international conference on Ubiquitous Computing, New York, NY, USA, 21–24 September 2008, pp. 302–311.
121. García, Ó.; Prieto, J.; Alonso, R.S.; Corchado, J.M. A Framework to Improve Energy Efficient Behaviour at Home through Activity and Context Monitoring. *Sensors* **2017**, *17*, 1749, <https://doi.org/10.3390/s17081749>.
122. Kim, Y.; Charbiwala, Z.; Singhanian, A.; Schmid, T.; Srivastava, M.B. Spotlight: Personal natural resource consumption pro-filer. In Proceedings of the 5th Workshop on Hot Topics in Embedded Networked Sensors, Cologne, Germany, 8–10 September 2008.
123. Hagras, H.; Callaghan, V.; Colley, M.; Clarke, G.; Pounds-Cornish, A.; Duman, H. Creating an Ambient-Intelligence Environment Using Embedded Agents. *IEEE Intell. Syst.* **2004**, *19*, 12–20, <https://doi.org/10.1109/mis.2004.61>.
124. Lee, Y. Design participation tactics: The challenges and new roles for designers in the co-design process. *CoDesign* **2008**, *4*, 31–50. <https://doi.org/10.1080/15710880701875613>.
125. Chiu, L.F.; Lowe, R.; Raslan, R.; Altamirano-Medina, H.; Wingfield, J. A socio-technical approach to post-occupancy evaluation: Interactive adaptability in domestic retrofit. *Build. Res. Inf.* **2014**, *42*, 574–590, <https://doi.org/10.1080/09613218.2014.912539>.
126. Cozijnsen, E.; Leidelmeijer, K.; Borsboom, W.; van Vliet, M. *Tevreden Bewoners*; Energiesprong: Den Haag, Netherlands, 2015.
127. Guerra-Santin, O.; Boess, S.; Konstantinou, T.; Herrera, N.R.; Klein, T.; Silvester, S. Designing for residents: Building monitoring and co-creation in social housing renovation in the Netherlands. *Energy Res. Soc. Sci.* **2017**, *32*, 164–179, <https://doi.org/10.1016/j.erss.2017.03.009>.
128. Pierce, J.; Strengers, Y.; Sengers, P.; Bødker, S. Introduction to the special issue on practice-oriented approaches to sustainable HCI. *ACM Trans. Comput. -Hum. Interact. (TOCHI)* **2013**, *20*, 1–8.
129. Skjølsvold, T.M.; Jørgensen, S.; Ryghaug, M. Users, design and the role of feedback technologies in the Norwegian energy transition: An empirical study and some radical challenges. *Energy Res. Soc. Sci.* **2017**, *25*, 1–8, <https://doi.org/10.1016/j.erss.2016.11.005>.
130. Laustsen, J.; Ruyssevelt, P.; Staniaszek, D.; Strong, D.; Zinetti, S. *Europe's Buildings under the Microscope*; Buildings Performance Institute Europe (BPIE): Brussels, Belgium, 2011.
131. Akotia, J.; Opoku, A. Sustainable regeneration project delivery in UK: A qualitative analysis of practitioners' engagement. *J. Facil. Manag.* **2018**, *16*, 87–100.
132. Maio, G.R.; Verplanken, B.; Manstead, A.S.R.; Stroebe, W.; Abraham, C.; Sheeran, P.; Conner, M. Social Psychological Factors in Lifestyle Change and Their Relevance to Policy. *Soc. Issues Policy Rev.* **2007**, *1*, 99–137, <https://doi.org/10.1111/j.1751-2409.2007.00005.x>.
133. Darnton, A. *Reference Report: An Overview of Behaviour Change Models and Their Uses*; Governmental Social Research (GSR) Behaviour Change Knowledge Review, Centre for Sustainable Development, University of Westminster: London, UK, 2008.
134. Gadenne, D.; Sharma, B.; Kerr, D.; Smith, T. The influence of consumers' environmental beliefs and attitudes on energy saving behaviours. *Energy Policy* **2011**, *39*, 7684–7694, <https://doi.org/10.1016/j.enpol.2011.09.002>.
135. Pickett-Baker, J.; Ozaki, R. Pro-environmental products: Marketing influence on consumer purchase decision. *J. Consum. Mark.* **2008**, *25*, 281–293, <https://doi.org/10.1108/07363760810890516>.
136. Ozaki, R. Adopting sustainable innovation: What makes consumers sign up to green electricity? *Bus. Strat. Environ.* **2010**, *20*, 1–17, doi:10.1002/bse.650.
137. Barbu, A.-D.; Griffiths, N.; Morton, G. Achieving energy efficiency through behaviour change: What does it take? In *EEA Technical Report*; European Environment Agency: Copenhagen, Denmark, 2013; Volume 5.
138. Ölander, F.; Thøgersen, J. Understanding of consumer behaviour as a prerequisite for environmental protection. *J. Consum. Policy* **1995**, *18*, 345–385, <https://doi.org/10.1007/bf01024160>.
139. Fogg, B.J. A behavior model for persuasive design. In Proceedings of the 4th international Conference on Persuasive Technology, New York, NY, USA, 26–29 April 2009; pp. 1–7.
140. Geelen, D.; Keyson, D.V.; Boess, S.; Brezet, H. Exploring the use of a game to stimulate energy saving in households. *J. Des. Res.* **2012**, *10*, 102, <https://doi.org/10.1504/jdr.2012.046096>.
141. Geelen, D.; Brezet, H.; Keyson, D.; Boess, S. Gaming for energy conservation in households. In Proceedings of the Knowledge Collaboration Learning for Sustainable Innovation, Delft, The Netherlands, 25–29 October 2010; pp. 25–29.
142. Whitmarsh, L.E.; Upham, P.; Poortinga, W.; McLachlan, C.; Darnton, A.; Sherry-Brennan, F.; Devine-Wright, P.; Demski, C.C. Public attitudes, understanding, and engagement in relation to low-carbon energy. A selective review of academic and non-academic literatures. In *Report for Research Council UK (RCUK) Energy Programme*; Research Councils: Swindon, UK, 2011.
143. Howden-Chapman, P.; Viggers, H.; Chapman, R.; O'Sullivan, K.; Barnard, L.T.; Lloyd, B. Tackling cold housing and fuel poverty in New Zealand: A review of policies, research, and health impacts. *Energy Policy* **2012**, *49*, 134–142, <https://doi.org/10.1016/j.enpol.2011.09.044>.
144. Geller, E.S.; Winett, R.A. Reaction to Willems and McIntire's Review of "Preserving the environment: New strategies for behavior change". *Behav. Anal.* **1984**, *7*, 71–72, <https://doi.org/10.1007/bf03391888>.
145. Froehlich, J. Promoting energy efficient behaviors in the home through feedback: The role of human-computer interaction. *HCIC Workshop* **2009**, 1–11.
146. Fischer, C. Feedback on household electricity consumption: A tool for saving energy? *Energy Effic.* **2008**, *1*, 79–104, <https://doi.org/10.1007/s12053-008-9009-7>.
147. Wood, G.; Newborough, M. Energy-use information transfer for intelligent homes: Enabling energy conservation with central and local displays. *Energy Build.* **2007**, *39*, 495–503, <https://doi.org/10.1016/j.enbuild.2006.06.009>.

148. Kluger, A.N.; DeNisi, A. The effects of feedback interventions on performance: A historical review, a meta-analysis, and a preliminary feedback intervention theory.. *Psychol. Bull.* **1996**, *119*, 254–284, <https://doi.org/10.1037/0033-2909.119.2.254>.
149. Ellegård, K.; Palm, J. Visualizing energy consumption activities as a tool for making everyday life more sustainable. *Appl. Energy* **2011**, *88*, 1920–1926, <https://doi.org/10.1016/j.apenergy.2010.11.019>.
150. Robinson, J. The Effect of Electricity-Use Feedback on Residential Consumption: A Case Study of Customers with Smart Meters in Milton, Ontario. Master's Thesis, University of Waterloo, Ontario, Canada, 2007.
151. Jenkins, C.D. *Building Better Health: A Handbook of Behavioral Change*; Scientific and Technical Publication: Washington, DC, USA, 2003; Volume 590.
152. Kollmuss, A.; Agyeman, J. Mind the Gap: Why do people act environmentally and what are the barriers to pro-environmental behavior? *Environ. Educ. Res.* **2002**, *8*, 239–260, doi:10.1080/13504620220145401.
153. Bång, M.; Svahn, M.; Gustafsson, A. Persuasive design of a mobile energy conservation game with direct feedback and social cues. In Proceedings of the 3rd International Conference of the Digital Games Research Association (DiGRA 2009), London, UK, 1–4 September 2009.
154. Gatersleben, B.; Vlek, C. Household consumption, quality of life, and environmental impacts: A psychological perspective and empirical study. In *Green households? Domestic Consumers, Environment, and Sustainability*; Routledge: London, UK, 1998; pp. 141–183.
155. Zachrisson, J.L.D.; Boks, C. Exploring behavioural psychology to support design for sustainable behaviour research. *J. Des. Res.* **2012**, *10*, 50–66. <https://doi.org/10.1504/jdr.2012.046139>.
156. Lee, Y.S.; Malkawi, A.M. Simulating multiple occupant behaviors in buildings: An agent-based modeling approach. *Energy Build.* **2014**, *69*, 407–416, <https://doi.org/10.1016/j.enbuild.2013.11.020>.
157. Lopes, M.; Antunes, C.; Martins, N. Energy behaviours as promoters of energy efficiency: A 21st century review. *Renew. Sustain. Energy Rev.* **2012**, *16*, 4095–4104, <https://doi.org/10.1016/j.rser.2012.03.034>.
158. Barr, S.; Gilg, A.W.; Ford, N. The household energy gap: Examining the divide between habitual- and purchase-related conservation behaviours. *Energy Policy* **2005**, *33*, 1425–1444, <https://doi.org/10.1016/j.enpol.2003.12.016>.
159. Mahdavi, A.; Berger, C.; Amin, H.; Ampatzi, E.; Andersen, R.; Azar, E.; Barthelmes, V.; Favero, M.; Hahn, J.; Khovalyg, D.; et al. The Role of Occupants in Buildings' Energy Performance Gap: Myth or Reality?. *Sustainability* **2021**, *13*, 3146, <https://doi.org/10.3390/su13063146>.
160. CLG. An Evidence Pack on Community Engagement and Empowerment. The Local and Regional Governance Research Unit at the Department of Communities and Local Government. Ph.D. Thesis, the Bucharest University of Economic Studies, București, Romania, 2008.