



Delft University of Technology

A vision for sustainable additive manufacturing

Graziosi, Serena; Faludi, Jeremy; Stanković, Tino; Borgianni, Yuri; Meisel, Nicholas; Hallstedt, Sophie I.; Rosen, David W.

DOI

[10.1038/s41893-024-01313-x](https://doi.org/10.1038/s41893-024-01313-x)

Publication date

2024

Document Version

Final published version

Published in

Nature Sustainability

Citation (APA)

Graziosi, S., Faludi, J., Stanković, T., Borgianni, Y., Meisel, N., Hallstedt, S. I., & Rosen, D. W. (2024). A vision for sustainable additive manufacturing. *Nature Sustainability*, 7(6), 698-705.
<https://doi.org/10.1038/s41893-024-01313-x>

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

A vision for sustainable additive manufacturing

Received: 10 June 2023

Accepted: 15 February 2024

Published online: 01 April 2024



Serena Graziosi¹✉, Jeremy Faludi², Tino Stanković³, Yuri Borgianni⁴, Nicholas Meisel⁵, Sophie I. Hallstedt⁶ & David W. Rosen⁷

Radical technological innovations are emerging in response to environmental, economic and geopolitical pressures. This affects how we design and manufacture new solutions. Additive manufacturing, one of the enabling technologies of the digital transition, can support more-sustainable manufacturing processes if developed through a system-level approach. In this Perspective, we adopt such an approach: we propose to use established sustainable design methods to innovate additive manufacturing systems and to consider how to make additive manufacturing an enabler of sustainable design in combination with conventional manufacturing. We then discuss how to implement our vision to enable additive manufacturing for sustainability.

Global challenges imposed by climate change, biodiversity loss and political turmoil are making the availability of raw materials and resources highly uncertain, calling for revising established practices from a sustainability point of view. In this respect, additive manufacturing (AM) is gaining notable attention as an alternative to conventional manufacturing (CM), such as casting, moulding, forging and extrusion. Additive manufacturing refers to a class of manufacturing processes that fabricate parts by repeatedly adding and processing materials layer by layer, known informally as 3D (three-dimensional) printing. Although its original role was to fabricate prototypes during product development, AM is now used extensively for production parts, tooling and an ever-increasing number of niche applications¹. Thousands of AM-fabricated parts are flying on airplanes and spacecraft, and millions of AM metal parts have been implanted in people as spinal fixtures and joint replacements. The global AM market is estimated at US\$15 billion in 2022 and is expected to grow at 20–21% annually for the next 10 years². Additive manufacturing currently accounts for approximately 2% of all global manufacturing activity but is projected to comprise over 9% of manufacturing by 2032², with multiple and heterogeneous industrial sectors (for example, food and construction) actively involved.

The wide variety of AM technologies and processable materials available promotes this widespread range of applications. Seven process categories and related identification acronyms have been identified in the International Organization for Standardization/ASTM 52900:2021 standard³ on the basis of the processing principle they implement: binder jetting (BJT), direct energy deposition (DED), material extrusion (MEX), material jetting (MJT), powder bed fusion (PBF), sheet lamination (SHL) and vat photopolymerization (VPP). Thanks to these enabling processes and AM's nature of stacking raw materials to fabricate complex geometries, industries' capabilities are broadened to design performance-optimized, lightweight designs not previously feasible with CM processes. The enhanced design freedom enabled by AM is so vast that a dedicated research topic, design for additive manufacturing (DfAM)⁴, has been established. The concept of DfAM shows the multiple dimensions of complexity that can be exploited thanks to AM when designing shapes, materials and functionalities to get numerous advantages in performance, personalization and uniqueness⁵. But does this unlocked design and manufacturing freedom ensure material efficiency? Are our capabilities to design better products fully utilized? What about energy efficiency and material circularity?

¹Department of Mechanical Engineering, Politecnico di Milano, Milan, Italy. ²Faculty of Industrial Design Engineering, Delft University of Technology, Delft, the Netherlands. ³Engineering Design and Computing Laboratory, Department of Mechanical and Process Engineering, ETH Zurich, Zurich, Switzerland. ⁴Faculty of Engineering, Free University of Bozen-Bolzano, Bolzano, Italy. ⁵School of Engineering Design and Innovation, The Pennsylvania State University, University Park, PA, USA. ⁶Division of Product Development, Department of Industrial and Materials Science, Chalmers University of Technology, Gothenburg, Sweden. ⁷Institute of High Performance Computing, Agency for Science, Technology and Research (A*STAR), Singapore, Singapore. ✉e-mail: serena.graziosi@polimi.it

Additive manufacturing can foster manufacturing flexibility and adaptability due to its ability to switch among different production batches rapidly. The desire is to optimize raw-material usage in manufacturing, in-service resource consumption such as vehicle fuel use or sociotechnical effects such as repair and remanufacturing. However, does this flexibility and resource optimization, combined with the capability to realize almost any shape or geometry, promote more-sustainable design and manufacturing practices? Under what circumstances does AM drive sustainability today, where does it worsen it, and how can we design it to be more universally sustainable?

Additive manufacturing is still considered a niche manufacturing technology with a niche market, but the previous data demonstrated that this scenario would change in the coming years. Its current impact on sustainability, whether positive or negative, will no longer be limited. We must act before the technology becomes established because then a change will become more challenging. This action must build on the different initiatives and governmental instruments, such as the United Nations' Sustainable Development Goals and the European Green Deal, pushing organizations to reconsider their practices. Implementation issues, such as limited data availability and the difficulty of analysing complex, systemic problems, still limit the adoption of these instruments in product development processes involving CM. How does that situation fit within the context of AM? Can we design AM technologies to meet requirements from these instruments more straightforwardly?

This Perspective will examine and answer these questions. It will also discuss sustainability challenges attributed to AM, new opportunities and actions to integrate a sustainability perspective into AM. It will end with a vision for future product development via sustainable AM offered through a system view of a sustainable design and manufacturing scenario.

Integrating sustainability into AM

To make AM more sustainable, it is necessary to integrate sustainable design strategies into practices for AM machine design, processes, development of raw materials and selection of supply chains. A system approach should be pursued. Before going into these topics, we must explain the current state of AM compared with CM and where AM should go to embrace sustainability.

The current state of AM

To promote the sustainability essence of AM, it is common to claim⁶ 'AM is green because it eliminates (1) manufacturing waste and (2) transportation of parts in supply chains'.

Although eliminating manufacturing waste is based on existing evidence, substantial nuance is needed before claiming it. Many traditional manufacturing processes, such as injection moulding, casting and extrusion, already produce minimal waste at scale. Their part designs are thoroughly optimized for manufacturing. The manufacturing waste of AM depends on many circumstances and factors, especially the chosen printers and materials. Polymer PBF can generate up to 44% material waste, with a likely range of yields from 56 to 80%⁷. Much AM printing powder is wasted due to the sensitivity to the oxidation of the underlying materials^{8,9}. Some photopolymer resin-based printers likewise produce relevant liquid resin waste¹⁰. That waste is compounded by sacrificial support material, which is also wasted. Failed prints are similarly wasted, although numbers on average failure rates are challenging to find because companies have strong incentives not to reveal them. Despite considerable efforts invested in reducing material waste, such as developing optimization approaches to design AM parts that do not require support structures¹¹, extensive waste material reduction seldom occurs.

Additive manufacturing can sometimes reduce material waste, substantially improving impacts, but it is strongly context dependent. It is usually true when compared with machining complex shapes or with CM processes requiring tooling for small production runs

(for example, vacuum casting). It is valuable for parts characterized by high-embodied-energy metals, as in aerospace¹², or low production volumes where the impacts of tooling would be important. Conventional manufacturing of complex lightweight titanium parts can, for example, generate up to 80–90% scrap^{9,13}. This titanium scrap is contaminated with oxygen and iron impurities, making it difficult to recycle as a high-grade material¹³. Additive manufacturing reduces the environmental impact by minimizing scrap and saving material during fabrication⁹. For example, titanium's high embodied energy makes the reduction of any material waste promising. However, although comparing AM advantages with the machining of complex geometry is popular, it offers a limited view. Most investments in AM are to scale up production volumes¹⁴. Low-volume production is not the expected future scenario. It is also unfruitful to think that since AM could have environmental advantages for low-volume manufacturing, switching all manufacturing to low-volume mass customization would be reasonable. This solution would only increase CM impacts because production volumes are reduced. It will not mitigate negative AM impacts.

This reasoning concerning material waste also involves other considerations. Let us assume that AM can reliably and consistently reduce waste. That is not particularly relevant to its overall environmental impacts compared with other manufacturing methods because most of its impacts come from energy use¹⁰. Most polymer printers' energy impact alone exceeds the total impact of injection moulding ABS (acrylonitrile butadiene styrene) plastic, sometimes by an order of magnitude¹⁰. This consideration is elaborated at maximum theoretical throughput, that is, printing a full print bed with 100% yield for 24 h d⁻¹ for each printer's entire lifetime, versus injection moulding at a mass production scale and considering the environmental impacts per part produced¹⁰. Results are similar for metal⁹. For most parts, AM uses more energy per kilogram of material processed than casting, moulding, forging or extrusion¹⁵. A considerable variation has also been seen between process categories (for example, MEX versus PBF versus VPP), same category but different printer brands and same printer but different materials¹⁰. Of course, different materials and processes provide different part strengths and other functional qualities. That relevant variation means much room for environmentally improving machine design and operations.

In addition, the carbon footprint of AM is 2 to 20 times higher per kilogram of material processed than CM methods at scale due to its high electricity use¹⁵. If metal PBF and DED processes completely replaced conventional hot isostatic powder-based pressing processes in manufacturing steel parts, they would use over ten times the energy⁸. These laser-based AM systems are still characterized by relatively low efficiency, with only 9–23% of the laser beam energy melting steel powders and 3.6–7.0% for aluminium powders¹⁶. In addition, the powder feedstock is tremendously energy intensive to produce. The high carbon footprint is also due to other printer components, such as motors and control electronics. Compared with the overall energy operating a PBF machine, only about 0.8% of the total energy is allocated for powder melting¹⁷. The comparison of AM with casting, extrusion, rolling and others¹⁵ becomes relevant for ramping up AM fabrication beyond small-batch production while improving environmental impacts. Therefore, we need to improve the efficiency of AM processes and AM raw materials production^{9,10}. We also need more studies comparing AM and CM impacts per part produced. They are fundamental to making more informed sustainability decisions. Measuring the impact per part produced instead of the impact per kilogram of material processed allows a much fairer comparison among technologies. The translation from impact per kilogram to impact per part is not straightforward, as multiple CM processes may be involved for one AM process. In addition, AM and CM might have multiple pre-processing or post-processing operations, an important consideration that is captured when measuring per part produced. Their wasted material is not included when measuring per kilogram of material processed.

The second part of the claim, that AM is green because it eliminates transportation of parts in supply chains, also deserves clarification. Additive manufacturing is commonly considered to reduce transportation dramatically, which is potentially a strategic sustainability driver. However, in most cases, raw materials must still be shipped. Additive manufacturing reduces only the need to transport different parts made of the same materials. Even if AM eliminated material transport, it would not substantially improve most products' life-cycle impacts. Life-cycle assessments (LCAs) have shown for decades that transport accounts for a small portion of the lifetime impacts of most typical products¹⁸. It is a common misconception that transportation represents a large share of the environmental impacts of products because transport accounts for a considerable percentage of global greenhouse gas emissions¹⁹. The global impacts of transport are mostly from transporting people, not shipping goods. Parts' weight reduction enabled by AM reduces transportation costs and environmental impacts. But this does not make AM products sustainable by default if impacts from other life-cycle stages are not lessened.

However, other benefits can be underlined. Since materials are usually commodities while manufacturing is a value add, local printing keeps more money in local economies, potentially benefiting economic goals. Local manufacturers might also be more easily monitored and certified for good labour practices. Companies should start reflecting on the most sustainable strategy to pursue: producing internally and managing the transportation of components or externalizing the production but working on guaranteeing suppliers' certification. A systemic perspective, alongside sustainability models, is needed to promote AM sustainability in multiple ways and support companies in making informed decisions.

Where AM should go

A fair and reliable assessment of when AM is better or worse than CM and how AM could be improved is highly context dependent. The baseline impacts of some AM processes are so high that despite the increased sustainable design opportunities present in lightweight design, process consolidation and material saving, their environmental impact is still much more relevant than that of CM processes and materials. Weight reduction can substantially decrease the use-phase impacts of aircraft because lifetime fuel usage is most of the total lifetime impact. However, it does not provide comparable savings for automotive or marine vehicles²⁰. In addition, even if AM substantially reduces material waste versus many CM processes, its current high energy use usually overwhelms the benefit.

To deal with these issues, comprehensive and context-based life-cycle perspectives are needed. So far, LCAs of AM have often been fragmented and unsystematic. Clarifying where AM is and is not sustainable is an excellent opportunity for research and practice if the following aspects are considered.

First, LCAs should choose fairer functional units. We recommend impacts per part produced for certain reference parts, rather than (or in addition to) per kilogram of material processed. Second, include pre-process and post-process operations and the printer's construction. Third, include machine utilization scenarios. Energy use per part printed can vary by up to two orders of magnitude from maximizing temporal and spatial utilization for some printer types¹¹. Some printers have high idle power and are left running between prints. Others can print many parts at once without using considerably more energy. This can apply to both metal and polymer printers^{10,21}. Having fewer printers shared by many users can dramatically reduce impacts. Reducing batch volumes may not always lead to energy savings. Studies should also break down the energy use of AM processes to the component or subsystem level¹⁷. They could set priorities for the sustainable redesign of AM processes, comparing heating energy with material impacts, waste, mechanical or other systems, post-print annealing or machining, or other aspects of the process. Such studies can also compare

consolidated parts, where several CM processes are replaced by one AM part with some post-processing, potentially resulting in lower total impacts.

An LCA excluding material production and end-of-life impacts could lead to missed opportunities for AM. While material impacts do not often dominate AM's total life-cycle impacts, they are still considerable and can be a lever towards exploring more-sustainable AM materials. It could also mean making design compromises using materials with lower technical performance in favour of better sustainability impacts^{9,22}. Additive manufacturing may enable the exploitation of new green materials simply because it is a different process.

The LCAs should also be expanded to include context-dependent design decisions (that is, how does part lightweighting influence the product's use phase?). We already discussed transportation aspects, but additional product life-cycle phases should be considered. Part consolidation can be relevant for manufacturing operations and post-processing phases. Despite the high impact of AM per operation, their substantial reduction could lead to a relevant net benefit. Design could thus emerge as a fundamental mediating factor in AM's capability to support sustainable product development. While theoretical models of such trade-offs have been performed²³, empirical research has not yet shown how often part consolidation replaces enough operations to pay back the extra energy per operation. In addition, highly consolidated parts may be less repairable if they prevent disassembly and replacement. This has not yet been studied at scale to determine how frequently the cost outweighs the benefit.

Besides measuring impacts, AM processes, machines and materials must be redesigned to improve impacts. One example is the solar sinter by Markus Kayser²⁴, which sinters sand into glass using a giant Fresnel lens, eliminating electric heating by passively focusing sunlight into a concentrated spot²⁴. The print bed's motors and electronics are powered by solar photovoltaics, and the sand can be locally sourced. This is an extreme example, and no LCAs have yet been performed, but it suggests enormous improvements to AM processes and materials.

Another example is replacing melting of plastics with direct ink writing AM of bio-composite pastes that harden by drying²⁵. Rael and San Fratello's binder jet printing of sawdust, grape skins or salt has been measured to have one-tenth to one-fortieth of the impacts per part printed as other polymer print technologies²⁶. Although the strength of bio-composite pastes is much lower than that of standard polymers, redesigned parts could have five times the wall thickness, using five times as much material while still having half the impact of most other AM parts. Such low-energy printing of upcycled biomaterials can include multiple materials with different strengths, stiffnesses, colours or other properties²⁷. Furthermore, AM can enable more-expensive novel materials to become economically viable due to optimized designs using less material, especially if printing consolidates manufacturing steps and thus saves labour or other processing costs. Including a material's end-of-life impacts enables comparisons of new materials with better recyclability or compostability. Current multi-material printing renders even commonly recyclable polymers non-recyclable because they cannot be easily separated from each other, accumulating impurities. Recovering unprinted metal powder of mixed materials is also challenging²⁸, and recyclable multi-material prints require entirely new printers with different processes²⁹. Multi-material prints can be easily recovered at end of life if all ingredients are compostable. Compost generally requires no sorting after removing non-compost trash. Some marginally compostable materials require higher-temperature facilities to biodegrade, but these facilities also process easily compostable materials.

Sustainable design tools and methods could be applied to make such improvements more systematic. Some studies have already cut the environmental impacts of printing through these methods, although such progress needs further development to scale to industry³⁰. Prioritizing sustainability as a performance requirement when

developing printers and materials, even without special design methods, would drive important progress. Examples could be designing metal alloys tolerant to impurities to enable more recycling²² or architected materials with advanced mechanical properties⁹ to prevent the need for high-performance materials. However, making sustainability a required design specification is the first step.

The second step is learning and using sustainable design tools and methods to help achieve those goals. This should include system thinking, that is, looking at the whole system when considering impacts and generating new solutions. It can increase creativity while avoiding optimizing one part to the detriment of the whole. Several methods for supporting its adoption exist in sustainable design^{31–33}. However, even without them, the basic concept can be powerful. One example is finding materials that solidify chemically at room temperature rather than being melted. Sourcing these from agricultural waste (for example, pecan shells or sawdust) has been shown to reduce print energy by 75% and reduce material impacts by 80% compared with standard melting (MEX) of ABS plastic, reducing material costs by 50%³⁰. However, they are not yet a drop-in replacement for plastics.

Additive manufacturing parts could be improved by incorporating design for sustainability into existing DfAM principles and heuristics³⁴. Life-cycle assessment might be integrated into existing optimization software to guide material choice, process parameters and geometry. Designers should be trained to accept that, from a sustainability perspective, the material with the best mechanical performance is not always the rational choice unless other gains justify its application. In addition, there is the need for data-driven design support tools capable of addressing challenges of improving sustainability from a system-thinking perspective³⁵. Such tools should advance material discovery for sustainability³⁶ and drive the optimized distribution of materials to reduce the environmental impact⁹. They should support AM holistically, involving data sharing among stakeholders and providing computational support to allow informed decisions.

We must also include social issues when reflecting on where AM should go. Unfortunately, the social dimension is rarely considered. Additive manufacturing's positive or negative impacts on fair wages, wealth inequality, political power inequality, community support and other cultural factors are currently challenging to assess. Methodologies for measuring these impacts are not as detailed or agreed on as environmental metrics. Some case studies³⁷ and methodological suggestions³⁸ exist, but the state of research is still exploratory³⁹. Additive manufacturing tools generally require less operator time than computer numerical controlled machining. This could be considered favourable for decreasing labour burden or negative for increasing unemployment. The Organisation for Economic Co-operation and Development's recommendations suggest that AM may assist entrepreneurs by lessening their need for capital in manufacturing tooling, thus opening more opportunities to the lower and middle classes⁶. However, this is a hypothesis not yet backed by empirical studies.

The role of AM in democratizing manufacturing has been recognized widely, given the adoption of consumer-grade AM systems in homes, maker spaces and schools⁴⁰. It has also stimulated noteworthy cultural transformations. The continuous shift from the abstract to the physical world helps unlock our imagination⁴¹. Additive manufacturing strongly supports this shift, particularly the role of inexpensive, desktop-scale MEX systems in stimulating students' creativity and consciousness about their abilities. However, promoting a culture of sustainable prototyping and manufacturing among the young generation is also essential, for example, by discouraging the printing of the so-called phatic objects, objects printed without a real purpose⁴², favouring strategies involving repairing and adjustment⁴². Promoting this culture also requires the availability of affordable solutions and practices to enable the reuse or recycling of failed prints or those prints that have reached their end of life.

One social aspect already studied in detail is worker health and safety regarding material toxicity hazards. This overlaps extensively with the environmental sustainability of materials. Quantitative empirical studies have investigated the outgassing of particulates that could be inhaled while printing polymers^{43,44} or metals⁴⁵; others have investigated the toxicity of printed parts themselves^{46,47}. Some fine powders, such as aluminium, have long been known to be explosion hazards⁴⁸. However, these studies lack direct comparisons with CM. Future works should make such comparisons and examine new AM materials that reduce health and safety risks to workers and environmental impacts. Consequences to stakeholders upstream in the life cycle must also be included. Decisions in the early design phase, such as material selection for AM, may impact local communities, for example, conflict materials, land grabbing and working conditions in supply chains.

Sustainable by design with AM

Additive manufacturing's contribution to sustainable growth can be further raised if AM technologies are used to implement established practices in sustainable design. The digital transition and sustainable development comply with scenarios where radical changes are needed and, to some extent, are already taking place. Despite the AM community being ready to accept these transformations and demonstrating a noteworthy commitment, indications are still lacking on aligning this transformation with principles for a sustainable society⁴⁹. Although the relationship between sustainable design and DfAM seems evident, a standard list of shared principles and strategies is lacking. As sustainable design has evolved, some sub-disciplines have matured enough to represent independent research areas including sustainability-oriented design for X (DfX) methods. Additive manufacturing could be a means for consolidating and successfully applying such methods⁵⁰. How to reach this is discussed in the following.

Design for product repair and maintenance

This method promotes designing product architectures for easy disassembly and reassembly to service or replace parts^{51,52}. Additive manufacturing can fabricate replacements on demand instead of manufacturers storing spare parts for years. Alternatively, AM can produce parts the manufacturer no longer supplies⁵³. This often requires redesigning parts for AM because current parts are designed for other manufacturing methods; this is time consuming, but methods for such redesign are being developed⁵⁴. Companies should be prepared to manage the integration of printed parts within already consolidated product architectures. Fundamental limits exist to what replacement parts can be printed today (for example, circuit boards and chips are difficult or impossible). Researchers estimate that at most 7.5–29.0% of repairs in repair cafés might be helped by AM spare parts⁵⁵. Since mass-scale production usually has a lower impact in the case of CM, AM is currently most useful for replacing parts not supplied by manufacturers or fixing large parts in situ⁵⁶. Data-driven design for repair via AM is underexploited⁵⁷, and it is unclear how much intelligent AM and design⁵⁸ could improve this.

Design for upgradability

This method targets improving and updating components to meet changing customer expectations to prolong product lifetimes^{59,60}. New or improved functionalities can be added thanks to easy-to-upgrade features in the design⁶⁰. Design for upgradability also works for CM, but AM represents a powerful tool when products are not designed for CM or the manufacturer does not provide upgrade parts⁵³. Additive manufacturing also has an advantage when upgrades involve customization or personalization. Personalization could extend product life due to the user establishing emotional attachment. In the area of AM, it is unclear how effective this will be for sustainability. The same attribute could stimulate worse consumerism. Insufficient research exists to show actual benefits versus costs in practice. It is worth investigating, but

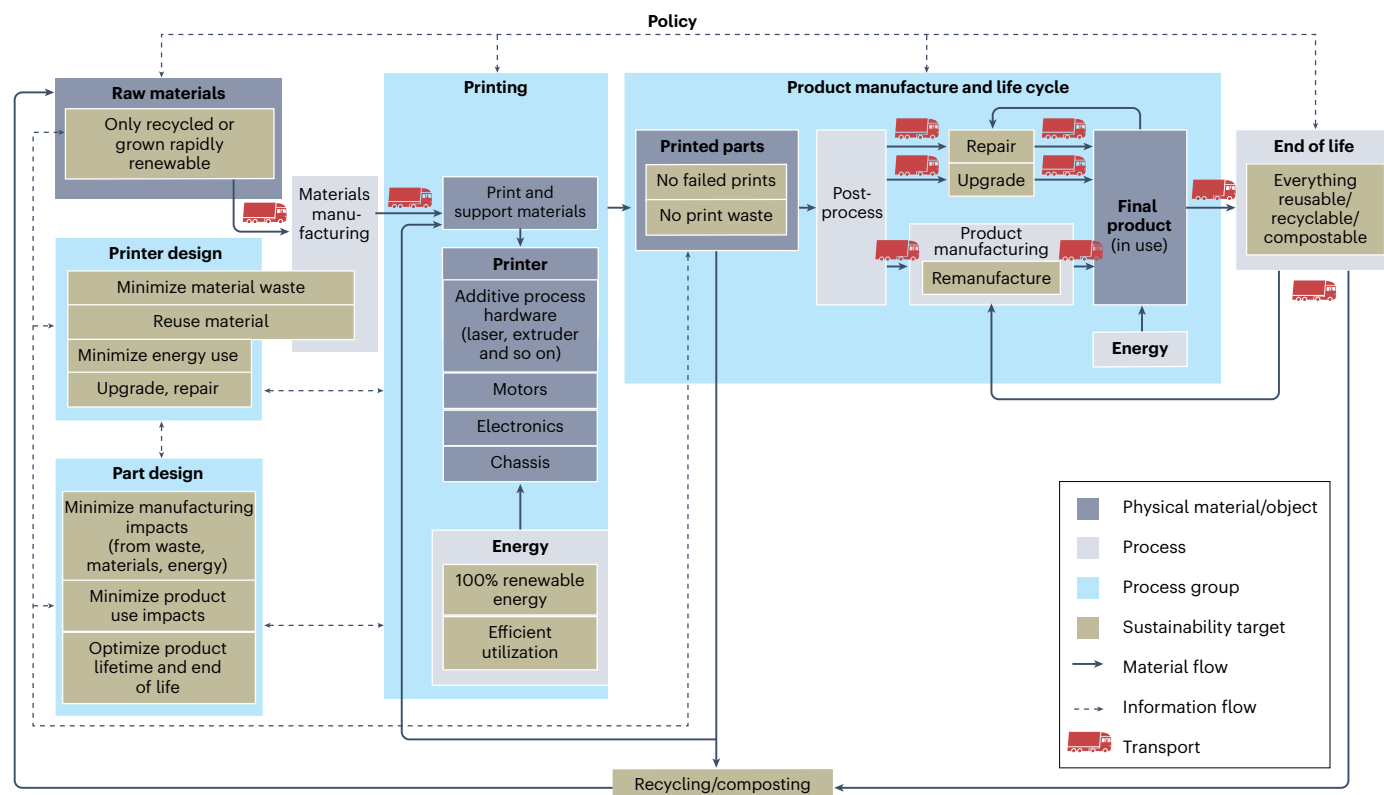


Fig. 1 | Envisioning a new role for AM. A scenario for sustainable AM driving sustainable development.

setting an ethical threshold concerning personalization is a complex strategy. How to support companies in guaranteeing both the profitability and sustainability of their upgrade services and whether AM alone or hybrid AM–CM strategies should be leveraged are open issues to be explored.

Design for remanufacturing or reuse

This method aims to give parts a second life after their first life cycle⁶¹, focusing on their easy disassembly and reassembly into a new product or a direct reuse⁶². As with repair, parts can be provided by CM or AM. Since current remanufacturing rarely happens at scale, AM has many opportunities to support designing parts that can be easily disassembled with the least damage or repaired after the disassembly if the damage occurred⁶³. Developing guidelines⁶⁴, decision support⁶⁵ and smart systems⁶⁶ facilitates design for remanufacturing, which can, in turn, be supported by AM⁶⁷ or hybrid AM–CM processes⁶⁸. The suitability of AM for remanufacturing has led to the proposal of shared guidelines on design for additive remanufacturing⁶³. There is a growing interest in it⁶⁹, with a call for more automation⁷⁰, even if multiple open issues must be addressed, such as the durability of AM components or improving repair and restoration phases⁶⁹. As with repair, depending on the production scale, AM of replacement parts can cause higher impacts than CM remanufacturing parts, just as it does for virgin product production. Break-even points should be identified⁷¹.

Design for recycling

Even if less effective than other circular economy (CE) approaches, design for recycling plays a fundamental role in extracting value from waste⁷². The challenge with recycling is that the raw material is usually downcycled; that is, it loses its original quality and properties⁷³. Additive manufacturing already allows the processing of thermoplastic materials with different percentages of recycled content⁷⁴. However, further research is needed to understand how to collect the waste and treat

the recycled material properly⁷⁵ since many printers are not robust to impurities in feedstocks. Some AM studies have also explored upcycling agricultural waste into semi-durable goods³⁰, although more development is required for commercial viability. Boosting market demand for secondary plastics is also essential⁷⁶. Multi-material printing and the possibility of embedding electronics⁷⁷ could make the recycling process even more challenging. The chemodiversity of materials affects recycling⁷⁸. Studies on multi-material printing must continue, but recyclability must be considered unless it is demonstrated that the new multi-material solution can considerably improve the product life cycle.

Ongoing issues

These DfX fields have overlapping borders^{57,61,67} because of commonly shared objectives. What is indisputable is their support for fulfilling CE goals and the central role AM can play⁵³. In addition, there is difficulty in assessing which DfX strategy to follow to best comply with CE principles: design out waste and pollution, keep products and materials in use or regenerate natural systems⁷⁹. This aspect transcends the AM field and is a shared open issue across domains. We also face methodological challenges concerning developing robust tools to support policymakers in strengthening the uptake of CE⁸⁰.

A future scenario

Systems thinking is an enabler of sustainable AM and helps AM enable other sustainable design. It urges designers to consider multiple aspects of product life cycles, from materials procurement to usage scenarios and end of life. Manageable closed loops can be essential for AM to support sustainable development, thus strengthening AM's role in facilitating CE practices. To enable this, a new role for AM should be envisioned. Figure 1 illustrates our vision of a sustainable AM production system scenario.

Figure 1 assumes that AM is used in a digital, flexible and adaptable manufacturing system strategy for circular material flows and

recursive improvement cycles. This vision incorporates the previously discussed aspects of where AM should develop and how sustainable by design with AM can be leveraged, and it is founded on the following assumptions:

- AM supports the scale-up of production volumes in multiple industrial fields.
- AM is used for manufacturing final parts and products, together with spare parts for repair, refurbishment and upgrade to prolong product lifetime.
- A new generation of AM technologies and materials is exploited, whose impacts and life cycle are improved.
- Implementing sustainable by design with AM methods represents a consolidated strategy that allows design engineers to make informed design choices concerning raw materials, the component in-service resource consumption and sociotechnical effects (for example, repair and remanufacturing).

Everything starts with the raw materials. They are crucial since materials give physicality to ideas. Products should be designed and produced with bio-based or recycled material components. Recycled content from other industrial processes can also be used to transform a cost into a new business opportunity.

In parallel, part design is performed. The product's design solution should consider sustainability, functional and aesthetic requirements. Sustainable design tools should be exploited to identify sustainability hot spots in the product life cycle and minimize impacts during raw-material acquisition, manufacturing, usage and return-to-life phases. Design requirements should include responsible material choice, optimal resource use in manufacturing, elimination of hazardous substances, safe working conditions, product lifetime and resource usage optimization and the proper management of parts' end of life.

The design requirements considered for the part design are also relevant for the printer design because AM process and machine impacts are embodied in the manufactured products. Optimizing energy consumption in the printing phase is strategic; increasing the machine's 'smartness' to minimize production waste and prevent failed prints, plus reuse what waste exists, is essential.

Once the raw material is manufactured and the part and printer design are complete, the printing can start. Although our view is oriented to AM, AM and CM processes will integrate or hybridize to optimize sustainable manufacturing. Conventional manufacturing can be combined to overcome some acknowledged limits of AM to foster the adoption of win-win schemes in manufacturing. Once successful strategies in AM are identified, they could also be tailored to work for CM. What little waste from this step and previous manufacturing stages exists should be recirculated and reused through dedicated recycling/composting processes. In addition, the possibility of sharing information related to the operating phase of the machine directly with the machine manufacturer could provide helpful feedback for the design of the next generation of machines. Conversely, the machine manufacturers will have to share the best practices leading to the optimal use of their systems. In this phase, attention must be paid to the equipment characteristics and the processes implemented. The AM system hardware (for example, motors, extruders, lasers) is relevant in environmental assessments. Likewise, the energy needed to make AM systems work is critical to the sustainability of the process. This situation can be alleviated by minimizing energy consumption and using renewable energy sources.

Finished parts will enter an assembly cycle, and the product life will start after production. That is the product manufacture and life-cycle phase. During this phase, collecting information about the product operating conditions can provide valuable data for designing the next generation of products. The product may also be subjected to repair,

which can extend its useful life. The information retrieved during the maintenance phase is another relevant feedback for the part design phase. At the end of the use phase, two situations could occur: (1) users have developed a strong attachment to the product and require an upgrade, or (2) a new life starts for the product in other users' hands through remanufacturing or refurbishment, likewise supported by AM. The information gathered during these phases is essential to update the know-how guiding new product design.

When the product definitively ends its useful life, it is processed, disassembled and reintroduced as recycled material or components that can undergo a remanufacturing cycle. In the hypothesis that no hazardous materials are present in the product, everything will be reused, recycled or composted.

The role of policymakers in this scenario is to make decisions that provide guidance and tools for driving sustainability in all phases. Tools that can promote the proposed actions in the scenario are currently lacking. Let this be a call for more studies examining policy design in relation to sustainable AM and investigating impacts on workers, entrepreneurs and society.

Additive manufacturing is not inherently circular or sustainable, but this scenario shows how AM can support sustainable development and CE. Exploring these possibilities is now required, with AM's weight in the global manufacturing scenario becoming relevant soon. Additive manufacturing has not yet finished scaling, and technologies are still evolving. Hence, there is still time for action before they become entrenched. Simultaneously, consumption cycles and how we conceptualize product life must be transformed. Each product has a history that must be valued. Each material can create value for a product. From waste, we can create value. Refurbished components can contribute to increasing the added value of new products, and innovations in AM and DfAM can thus contribute to developing this value. A vision for sustainable AM will happen only if all the actors and stakeholders involved in the product value chain have a synergy of intents and commitment towards sustainability targets.

References

1. Gibson, I., Rosen, D., Stucker, B. & Khorasani, M. *Additive Manufacturing Technologies* (Springer, 2021).
This book comprehensively overviews additive manufacturing technologies, detailing the main process principles, materials, design opportunities and digital workflow.
2. Additive manufacturing market. *Precedence Research* <https://www.precedenceresearch.com/additive-manufacturing-market> (2023).
3. ISO/ASTM 52900:2021, *Additive Manufacturing—General Principles—Fundamentals and Vocabulary* (ISO, 2021).
4. Thompson, M. K. et al. Design for additive manufacturing: trends, opportunities, considerations, and constraints. *CIRP Ann. Manuf. Technol.* **65**, 737–760 (2016).
5. Rosen, D. & Wong, J. in *Additive Manufacturing Design and Applications* (eds Seifi, M. et al.) 1–14 (ASM International, 2023); <https://doi.org/10.31399/asm.hb.v24A.a0006947>
6. *The Next Production Revolution: Implications for Governments and Business* (OECD, 2017).
7. Telenko, C. & Seepersad, C. A comparison of the energy efficiency of selective laser sintering and injection molding of nylon parts. *Rapid Prototyp. J.* **18**, 472–481 (2012).
8. Azevedo, J. M. C., CabreraSerrenho, A. & Allwood, J. M. Energy and material efficiency of steel powder metallurgy. *Powder Technol.* **328**, 329–336 (2018).
This paper shows by an example how to objectively consider and analyse different aspects of a possible future manufacturing scenario in which AM would be scaled up to current production volumes.
9. Raabe, D., Tasan, C. C. & Olivetti, E. A. Strategies for improving the sustainability of structural metals. *Nature* **575**, 64–74 (2019).

10. Shi, Y. & Faludi, J. Using life cycle assessment to determine if high utilization is the dominant force for sustainable polymer additive manufacturing. *Addit. Manuf.* **35**, 101307 (2020).
11. Liu, J. et al. Current and future trends in topology optimization for additive manufacturing. *Struct. Multidiscip. Optim.* **57**, 2457–2483 (2018).
12. Priarone, P. C. & Ingarao, G. Towards criteria for sustainable process selection: on the modelling of pure subtractive versus additive/subtractive integrated manufacturing approaches. *J. Clean. Prod.* **144**, 57–68 (2017).
13. Takeda, O. & Okabe, T. H. Current status of titanium recycling and related technologies. *JOM* **71**, 1981–1990 (2019).
14. Khorram Niaki, M. & Nonino, F. *The Management of Additive Manufacturing* (Springer, 2018).
15. Van Sice, C. & Faludi, J. Comparing environmental impacts of metal additive manufacturing to conventional manufacturing. *Proc. Des. Soc.* **1**, 671–680 (2021).
16. Gutowski, T. et al. Note on the rate and energy efficiency limits for additive manufacturing. *J. Ind. Ecol.* **21**, S69–S79 (2017).
17. Yi, L. & Aurich, J. C. Energy performance evaluation of selective laser melting. *Procedia CIRP* **105**, 559–564 (2022).
18. Jørgen Hanssen, O. Environmental impacts of product systems in a life cycle perspective. *J. Clean. Prod.* **6**, 299–311 (1998).
19. IPCC *Climate Change 2022: Impacts, Adaptation and Vulnerability* (eds Pörtner, H. O. et al.) (Cambridge Univ. Press, 2022).
20. Kellens, K. et al. Environmental dimensions of additive manufacturing: mapping application domains and their environmental implications. *J. Ind. Ecol.* **21**, 49–69 (2017).
21. Faludi, J., Baumers, M., Maskery, I. & Hague, R. Environmental impacts of selective laser melting: do printer, powder, or power dominate? *J. Ind. Ecol.* **21**, S144–S156 (2017).
22. Olivetti, E. A. & Cullen, J. M. Toward a sustainable materials system. *Science* **360**, 1396–1398 (2018).
This paper promotes a systemic view towards achieving sustainable products by considering the environmental life cycle of materials.
23. Yang, S., Min, W., Ghibaudo, J. & Zhao, Y. F. Understanding the sustainability potential of part consolidation design supported by additive manufacturing. *J. Clean. Prod.* **232**, 722–738 (2019).
24. Markus, K. *Solar Sinter Project* (Royal College of Art, 2011).
25. Rosenthal, M., Henneberger, C., Gutkes, A. & Bues, C.-T. Liquid deposition modeling: a promising approach for 3D printing of wood. *Holz Roh Werkst* **76**, 797–799 (2018).
26. Rael, R. & San Fratello, V. *Printing Architecture: Innovative Recipes for 3D Printing* (Princeton Architectural Press, 2018).
27. Mogas-Soldevila, L., Duro-Royo, J. & Oxman, N. Water-based robotic fabrication: large-scale additive manufacturing of functionally graded hydrogel composites via multichamber extrusion. *3D Print. Addit. Manuf.* **1**, 141–151 (2014).
28. Horn, M. et al. Multi-material additive manufacturing—recycling of binary metal powder mixtures by screening. *Procedia CIRP* **93**, 50–55 (2020).
29. Hiller, J. D. & Lipson, H. Fully recyclable multi-material printing. In *Proc. 2009 International Solid Freeform Fabrication Symposium* (ed. Bourell, D. L.) 98–106 (Univ. Texas, 2009); <https://doi.org/10.26153/tsw/15092>
30. Faludi, J., Van Sice, C. M., Shi, Y., Bower, J. & Brooks, O. M. K. Novel materials can radically improve whole-system environmental impacts of additive manufacturing. *J. Clean. Prod.* **212**, 1580–1590 (2019).
This paper provides a foundational study on novel, bio-based AM materials, supported by a system-level analysis of their sustainability impacts.
31. Byggeth, S., Broman, G. & Robèrt, K.-H. A method for sustainable product development based on a modular system of guiding questions. *J. Clean. Prod.* **15**, 1–11 (2007).
32. Hallstedt, S. I. & Isaksson, O. Material criticality assessment in early phases of sustainable product development. *J. Clean. Prod.* **161**, 40–52 (2017).
33. Hallstedt, S. I. Sustainability criteria and sustainability compliance index for decision support in product development. *J. Clean. Prod.* **140**, 251–266 (2017).
This paper provides a novel approach to define the sustainability design space and long-term sustainability criteria of a product solution, considering the complete life cycle.
34. Blösch-Paidosh, A. & Shea, K. Industrial evaluation of design heuristics for additive manufacturing. *Des. Sci.* **8**, e13 (2022).
35. Alexander, S. M. et al. Qualitative data sharing and synthesis for sustainability science. *Nat. Sustain* **3**, 81–88 (2020).
36. Gomes, C. P., Fink, D., Van Dover, R. B. & Gregoire, J. M. Computational sustainability meets materials science. *Nat. Rev. Mater.* **6**, 645–647 (2021).
37. Soares, B. et al. Social life cycle performance of additive manufacturing in the healthcare industry: the orthosis and prosthesis cases. *Int. J. Comput. Integr. Manuf.* **34**, 327–340 (2021).
38. Naghshineh, B., Ribeiro, A., Jacinto, C. & Carvalho, H. Social impacts of additive manufacturing: a stakeholder-driven framework. *Technol. Forecast. Soc. Change* **164**, 120368 (2021).
39. Matos, F. & Jacinto, C. Additive manufacturing technology: mapping social impacts. *J. Manuf. Technol. Manage.* **30**, 70–97 (2018).
40. Alemán, M. W., Tomko, M. E., Linsey, J. S. & Nagel, R. L. How do you play that makerspace game? An ethnographic exploration of the habitus of engineering makerspaces. *Res. Eng. Des.* **33**, 351–366 (2022).
41. Brown, T. *Change by Design. How Design Thinking Transforms Organizations and Inspires Innovation* (Harper Collins, 2019).
42. Bosqué, C. What are you printing? Ambivalent emancipation by 3D printing. *Rapid Prototyp. J.* **21**, 572–581 (2015).
43. Stephens, B., Azimi, P., El Orch, Z. & Ramos, T. Ultrafine particle emissions from desktop 3D printers. *Atmos. Environ.* **79**, 334–339 (2013).
44. Azimi, P., Fazli, T. & Stephens, B. Predicting concentrations of ultrafine particles and volatile organic compounds resulting from desktop 3D printer operation and the impact of potential control strategies. *J. Ind. Ecol.* **21**, S107–S119 (2017).
45. Chen, R. et al. Exposure, assessment and health hazards of particulate matter in metal additive manufacturing: a review. *Chemosphere* **259**, 127452 (2020).
46. Oskui, S. M. et al. Assessing and reducing the toxicity of 3D-printed parts. *Environ. Sci. Technol. Lett.* **3**, 1–6 (2016).
47. Tedla, G., Jarabek, A. M., Byrley, P., Boyes, W. & Rogers, K. Human exposure to metals in consumer-focused fused filament fabrication (FFF)/3D printing processes. *Sci. Total Environ.* **814**, 152622 (2022).
48. Mason, R. B. & Taylor, C. S. Explosion of aluminum powder dust clouds. *Ind. Eng. Chem.* **29**, 626–631 (1937).
49. Broman, G. I. & Robèrt, K.-H. A framework for strategic sustainable development. *J. Clean. Prod.* **140**, 17–31 (2017).
This paper presents a framework including overarching socioecological sustainability principles used from a backcasting perspective for defining a sustainability vision.
50. Yang, S. & Zhao, Y. F. Additive manufacturing-enabled design theory and methodology: a critical review. *Int. J. Adv. Manuf. Technol.* **80**, 327–342 (2015).
This review paper analyses the suitability of engineering design theory and methodology to support DfAM and finds it lacking since it does not encourage the development of creative ideas that benefit from AM's potential.
51. Ackermann, L. Design for product care: enhancing consumers' repair and maintenance activities. *Des. J.* **21**, 543–551 (2018).

52. de Fazio, F., Bakker, C., Flipsen, B. & Balkenende, R. The disassembly map: a new method to enhance design for product reparability. *J. Clean. Prod.* **320**, 128552 (2021).
53. Sauerwein, M., Doubrovski, E., Balkenende, R. & Bakker, C. Exploring the potential of additive manufacturing for product design in a circular economy. *J. Clean. Prod.* **226**, 1138–1149 (2019).
This article provides a wide perspective on the opportunities enabled by AM when it comes to designing products while aiming at the realization of CE principles and includes insights from both the literature and empirical research.
54. Bolaños Arriola, J., van Oudheusden, A. A., Flipsen, B. & Faludi, J. *3D Printing for Repair Guide* (TU Delft OPEN, 2022).
55. Samenjo, K., van Oudheusden, A., Arriola, J. B., Flipsen, B. & Faludi, J. Opportunities for 3D-printable spare parts: estimations from historical data. In *Proc. PLATE 2021: The 4th Conference on Product Lifetimes and the Environment* (ed. Fitzpatrick, C.) 1–10 (2022).
56. Wilson, J. M., Piya, C., Shin, Y. C., Zhao, F. & Ramani, K. Remanufacturing of turbine blades by laser direct deposition with its energy and environmental impact analysis. *J. Clean. Prod.* **80**, 170–178 (2014).
57. Aziz, N. A., Adnan, N. A. A., Wahab, D. A. & Azman, A. H. Component design optimisation based on artificial intelligence in support of additive manufacturing repair and restoration: current status and future outlook for remanufacturing. *J. Clean. Prod.* **296**, 126401 (2021).
58. Xiong, Y., Tang, Y., Zhou, Q., Ma, Y. & Rosen, D. W. Intelligent additive manufacturing and design: state of the art and future perspectives. *Addit. Manuf.* **59**, 103139 (2022).
59. Go, T. F., Wahab, D. A. & Hishamuddin, H. Multiple generation life-cycles for product sustainability: the way forward. *J. Clean. Prod.* **95**, 16–29 (2015).
60. Aziz, N. A., Wahab, D. A., Ramli, R. & Azhari, C. H. Modelling and optimisation of upgradability in the design of multiple life cycle products: a critical review. *J. Clean. Prod.* **112**, 282–290 (2016).
61. Lindkvist Haziri, L. & Sundin, E. Supporting design for remanufacturing—a framework for implementing information feedback from remanufacturing to product design. *J. Remanufacturing* **10**, 57–76 (2020).
62. Potting, J., Hekkert, M., Worrell, E. & Hanemaaijer, A. *Circular Economy: Measuring Innovation in Product Chains* (PBL Netherlands Environmental Assessment Agency, 2017).
63. Schlesinger, L., Koller, J., Pagels, M. & Döpfer, F. Alignment of design rules for additive manufacturing and remanufacturing. *J. Remanuf.* <https://doi.org/10.1007/s13243-022-00122-9> (2022).
64. Charter, M. & Gray, C. Remanufacturing and product design. *Int. J. Prod. Dev.* **6**, 375 (2008).
65. Yang, S. S., Ong, S. K. & Nee, A. Y. C. A decision support tool for product design for remanufacturing. *Procedia CIRP* **40**, 144–149 (2016).
66. Ke, C., Jiang, Z., Zhang, H., Wang, Y. & Zhu, S. An intelligent design for remanufacturing method based on vector space model and case-based reasoning. *J. Clean. Prod.* **277**, 123269 (2020).
67. Kandukuri, S., Günay, E. E., Al-Araidah, O. & Okudan Kremer, G. E. Inventive solutions for remanufacturing using additive manufacturing: ETRIZ. *J. Clean. Prod.* **305**, 126992 (2021).
68. Liu, J., Zheng, Y., Ma, Y., Qureshi, A. & Ahmad, R. A topology optimization method for hybrid subtractive–additive remanufacturing. *Int. J. Precis. Eng. Manuf. Green. Technol.* **7**, 939–953 (2020).
69. Kanishka, K. & Acherjee, B. A systematic review of additive manufacturing-based remanufacturing techniques for component repair and restoration. *J. Manuf. Process.* **89**, 220–283 (2023).
70. Kerin, M. & Pham, D. T. A review of emerging industry 4.0 technologies in remanufacturing. *J. Clean. Prod.* **237**, 117805 (2019).
71. Ardente, F., Talens Peiró, L., Mathieux, F. & Polverini, D. Accounting for the environmental benefits of remanufactured products: method and application. *J. Clean. Prod.* **198**, 1545–1558 (2018).
72. King, S. Recycling our way to sustainability. *Nature* **611**, S7 (2022).
73. Syberg, K. Beware the false hope of recycling. *Nature* **611**, S6 (2022).
74. Mikula, K. et al. 3D printing filament as a second life of waste plastics—a review. *Environ. Sci. Pollut. Res.* **28**, 12321–12333 (2021).
75. Cruz Sanchez, F. A., Boudaoud, H., Camargo, M. & Pearce, J. M. Plastic recycling in additive manufacturing: a systematic literature review and opportunities for the circular economy. *J. Clean. Prod.* **264**, 121602 (2020).
76. DeWeerd, S. How to make plastic less of an environmental burden. *Nature* **611**, S2–S5 (2022).
77. Jiang, R., Kleer, R. & Pillar, F. T. Predicting the future of additive manufacturing: a Delphi study on economic and societal implications of 3D printing for 2030. *Technol. Forecast. Soc. Change* **117**, 84–97 (2017).
78. Zuin, V. G. & Kümmerer, K. Chemistry and materials science for a sustainable circular polymeric economy. *Nat. Rev. Mater.* **7**, 76–78 (2022).
79. de Oliveira, C. T. & Oliveira, G. G. A. What circular economy indicators really measure? An overview of circular economy principles and sustainable development goals. *Resour. Conserv. Recycl.* **190**, 106850 (2023).
80. Polverini, D. Regulating the circular economy within the ecodesign directive: progress so far, methodological challenges and outlook. *Sustain. Prod. Consum.* **27**, 1113–1123 (2021).

Acknowledgements

We acknowledge the Design Society (www.designsociety.org) for supporting and promoting the activities of its special interest groups (SIGs). This Perspective results from a collaboration between the Design for Additive Manufacturing (DfAM) SIG and the Sustainable Design SIG.

Author contributions

S.G., J.F., T.S., Y.B., N.M., S.I.H. and D.W.R. contributed equally to conceptualizing, drafting and revising the paper. S.G. coordinated the research team for the writing of the article.

Competing interests

The authors declare no competing interests.

Additional information

Correspondence should be addressed to Serena Graziosi.

Peer review information *Nature Sustainability* thanks the anonymous reviewers for their contribution to the peer review of this work.

Reprints and permissions information is available at www.nature.com/reprints.

Publisher's note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Springer Nature or its licensor (e.g. a society or other partner) holds exclusive rights to this article under a publishing agreement with the author(s) or other rightsholder(s); author self-archiving of the accepted manuscript version of this article is solely governed by the terms of such publishing agreement and applicable law.

© Springer Nature Limited 2024