

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics (PPT)

Kramer, Onno

Publication date

2018

Document Version

Final published version

Citation (APA)

Kramer, O. (2018). *Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics (PPT)*. 16th Multiphase Flows conference and shore course, Dresden, Germany.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.


Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.



15 November 2018

16th Multiphase Flows conference & shore course – Simulation, Experiment and Application

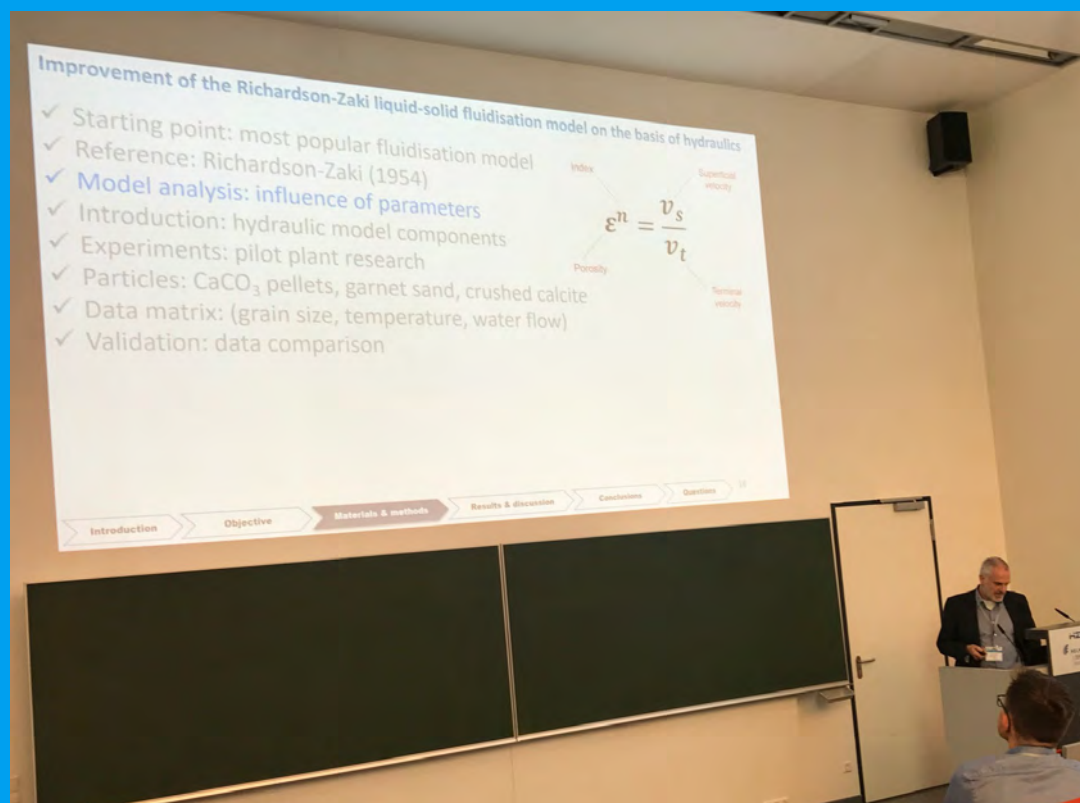



Onno Kramer

15 November 2018

16th Multiphase Flows conference & shore course – Simulation, Experiment and Application



Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics





Contents

- o Introduction
- o Objectives
- o Materials and methods
- o Results and discussion
- o Conclusions
- o Questions



Contents

- **Introduction**
- Objectives
- Materials and methods
- Results and discussion
- Conclusions
- Questions

Hydraulic modelling of liquid-solid fluidisation in drinking water treatment processes

Onno Kramer^{1, 2, 3, 4}

Eric Baars¹

Peter de Moel^{3, 5}

Wim van Vugt²

Johan Padding⁴

Jan Peter van der Hoek^{1, 3}

¹ **Waternet** Drinking Water Department

² **HU** University of Applied Sciences Utrecht,
Institute for Life Science and Chemistry,


³ **TUD** Delft University of Technology,
Faculty of Civil Engineering and Geosciences

⁴ **TUD** Delft University of Technology,
Faculty of Mechanical, Maritime and Materials Engineering

⁵ **Omnisys**
Consultancy



Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

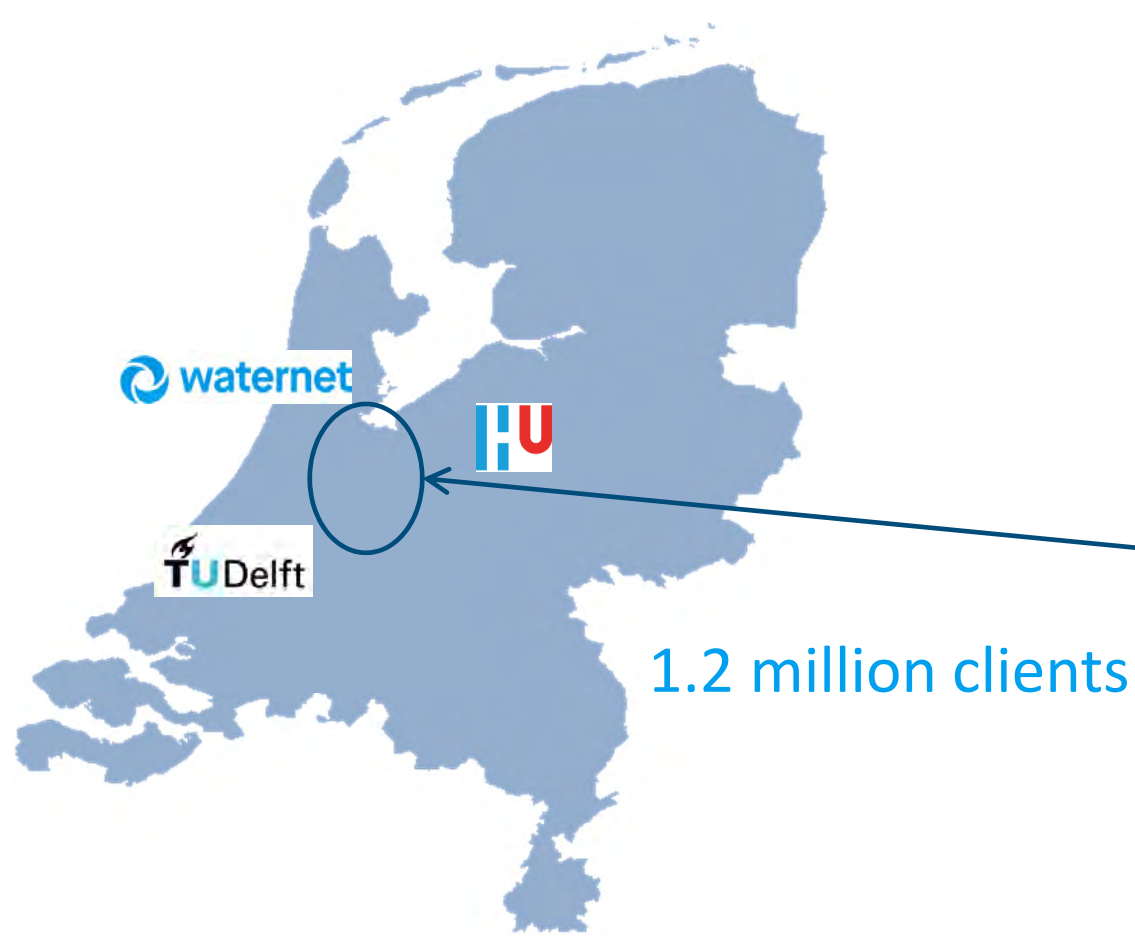


Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Background: (water cycle)
- ✓ Field: (drinking water treatment processes)
- ✓ System: (multiphase flows)
- ✓ Process: (softening)
- ✓ Fluidisation: (liquid-solid = water-calcite pellets)





Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Background: (water cycle)
- ✓ Field: (drinking water treatment processes)
- ✓ System: (multiphase flows)
- ✓ Process: (softening)
- ✓ Fluidisation: (liquid-solid = water-calcite pellets)

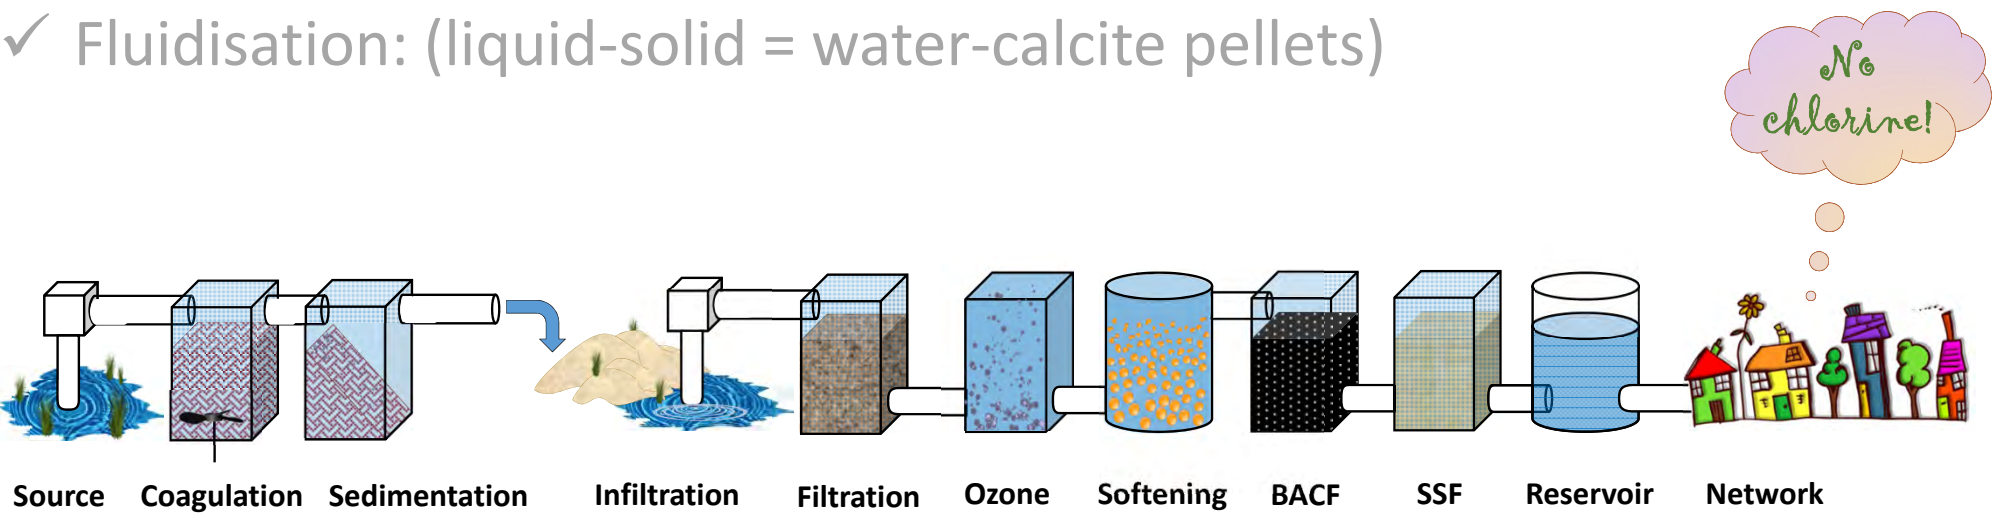

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics


- ✓ Background: (water cycle)
- ✓ Field: (drinking water treatment processes)
- ✓ **System: (multiphase flows)**
- ✓ Process: (softening)
- ✓ Fluidisation: (liquid-solid = water-calcite pellets)

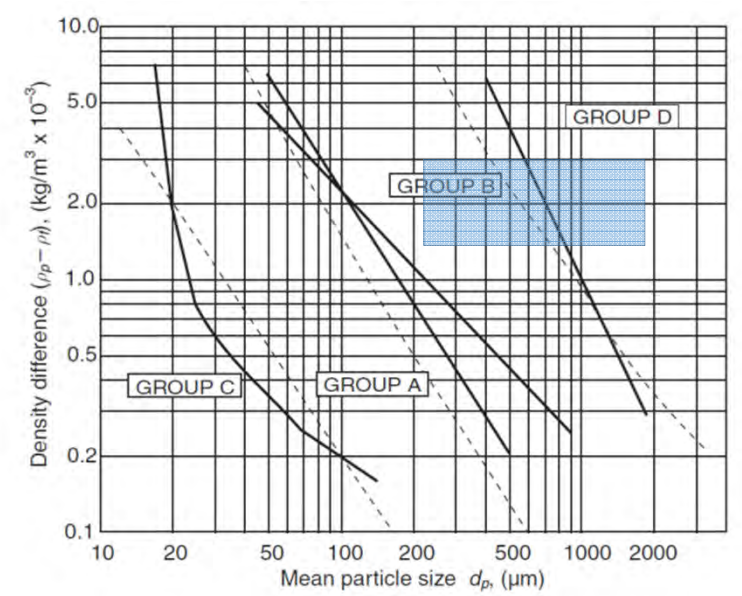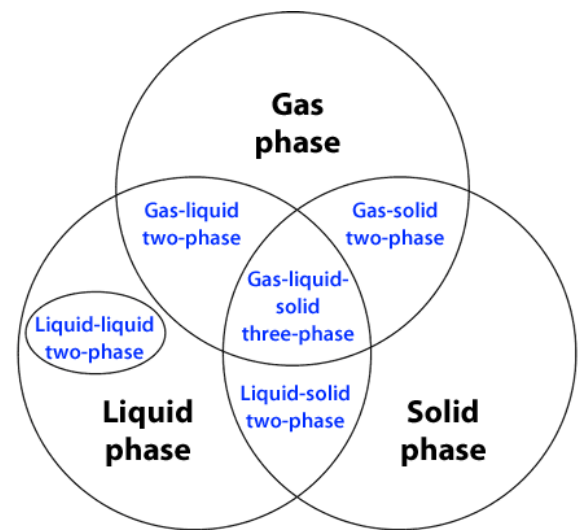

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics


- ✓ Background: (water cycle)
- ✓ Field: (drinking water treatment processes)
- ✓ System: (multiphase flows)
- ✓ **Process: (softening)**
- ✓ Fluidisation: (liquid-solid = water-calcite pellets)

- Hardness reduction to 1.4 mmol/L
- Reduces solubility of lead (public health) and copper (environment)
- Economic benefits and comfort
 - Reduction of washing powder
 - Increase life time hot water equipment
 - Cleaner laundry, tasteful tea

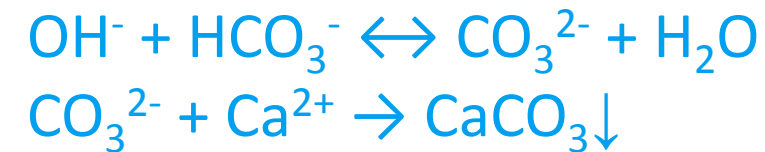

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Background: (water cycle)
- ✓ Field: (drinking water treatment processes)
- ✓ System: (multiphase flows)
- ✓ Process: (softening)
- ✓ Fluidisation: (liquid-solid = water-calcite pellets)

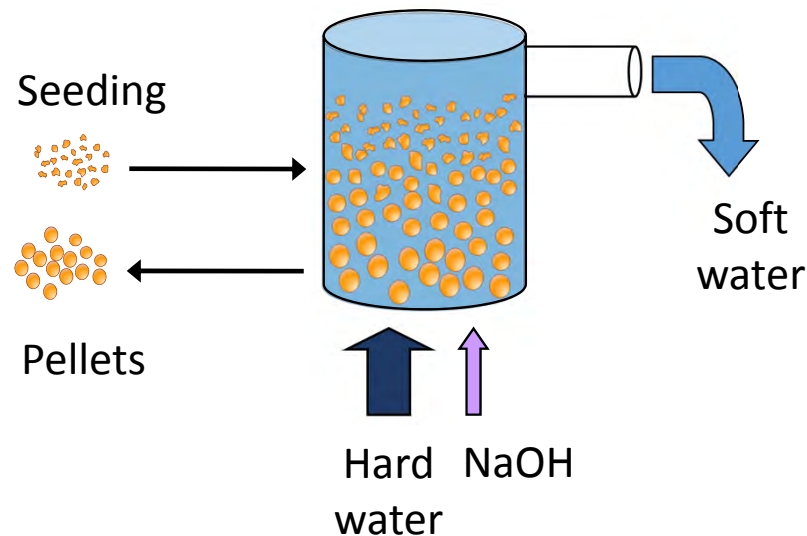



Contents

- o Introduction
- **Objectives**
- o Materials and methods
- o Results and discussion
- o Conclusions
- o Questions

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

✓ Objectives:

- Increasing sustainability
- Reducing chemical use
- Improving water quality

✓ Method: improved model based on hydraulics (porosity)

✓ Focus: crystallisation on specific surface area

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

✓ Objectives:

- Increasing sustainability
- Reducing chemical use
- Improving water quality

✓ Method: improved model based on hydraulics (porosity)

✓ Focus: crystallisation on specific surface area



Contents

- o Introduction
- o Objectives
- **Materials and methods**
- o Results and discussion
- o Conclusions
- o Questions

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Starting point: most popular fluidisation model
- ✓ Reference: Richardson-Zaki (1954)
- ✓ Model analysis: influence of parameters
- ✓ Introduction: hydraulic model components
- ✓ Experiments: pilot plant research
- ✓ Particles: CaCO_3 pellets, garnet sand, crushed calcite
- ✓ Data matrix: (grain size, temperature, water flow)
- ✓ Validation: data comparison



Introduction

Objective

Materials & methods

Results & discussion

Conclusions

Questions

16

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Starting point: most popular fluidisation model
- ✓ Reference: Richardson-Zaki (1954)
- ✓ **Model analysis: influence of parameters**
- ✓ Introduction: hydraulic model components
- ✓ Experiments: pilot plant research
- ✓ Particles: CaCO_3 pellets, garnet sand, crushed calcite
- ✓ Data matrix: (grain size, temperature, water flow)
- ✓ Validation: data comparison

$$\varepsilon^n = \frac{v_s}{v_t}$$

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics


- ✓ Starting point: most popular fluidisation model
- ✓ Reference: Richardson-Zaki (1954)
- ✓ **Model analysis: influence of parameters**
- ✓ Introduction: hydraulic model components
- ✓ Experiments: pilot plant research
- ✓ Particles: CaCO_3 pellets, garnet sand, crushed calcite
- ✓ Data matrix: (grain size, temperature, water flow)
- ✓ Validation: data comparison

$$\epsilon^n = \frac{v_s}{v_t}$$

Diagram illustrating the Richardson-Zaki equation: $\epsilon^n = \frac{v_s}{v_t}$. The variables are labeled as follows:


- ϵ^n : Porosity (Index)
- v_s : Superficial velocity
- v_t : Terminal velocity

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

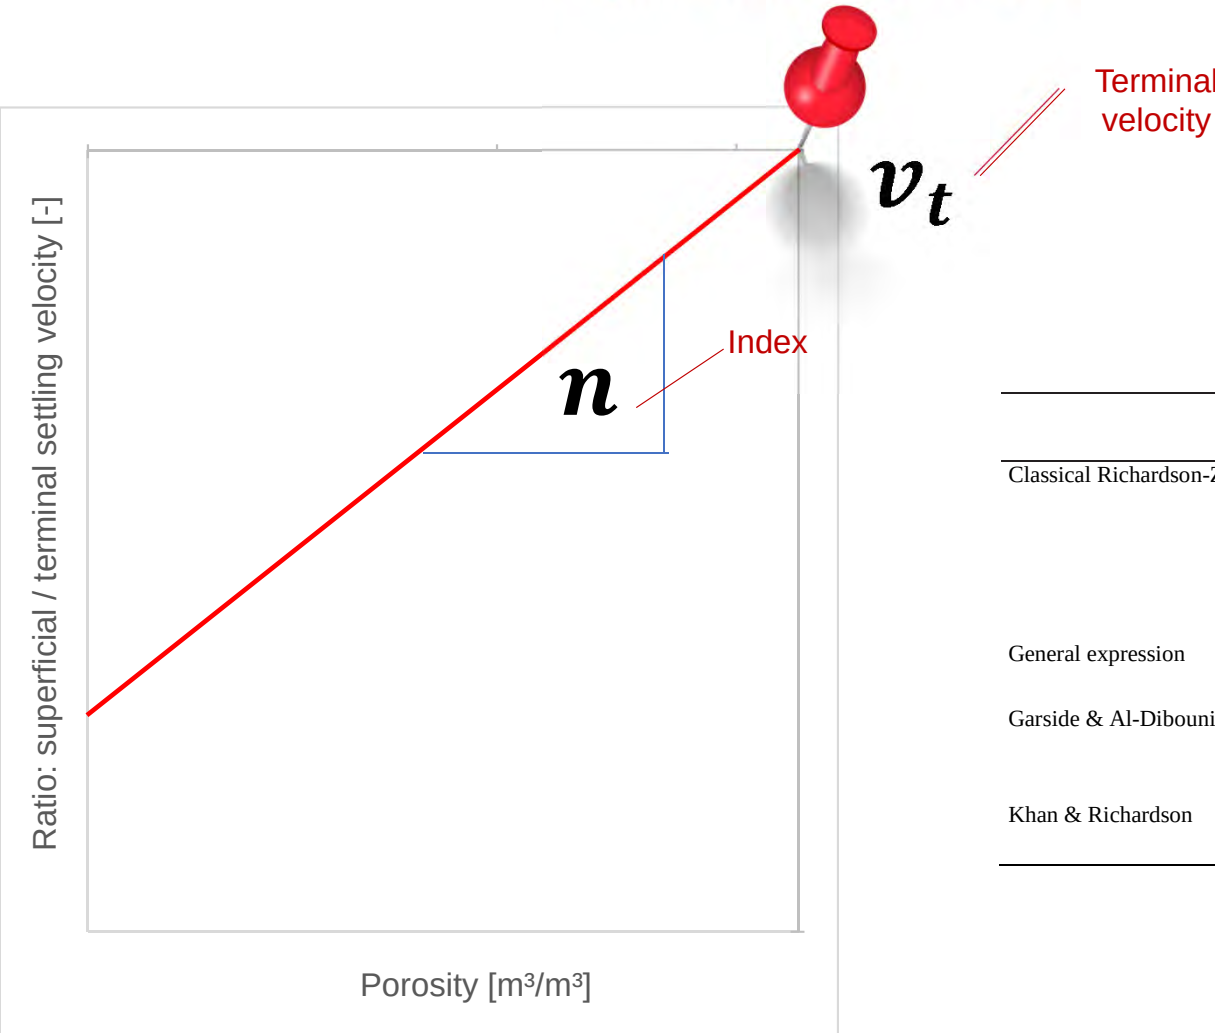


Formula	
Classical Richardson-Zaki equation	$n = \begin{cases} Re_t < 0.2, & n = 4.65 \\ 0.2 \leq Re_t < 1, & n = 4.4 Re_t^{-0.03} \\ 1 \leq Re_t < 500, & n = 4.4 Re_t^{-0.1} \\ Re_t \geq 500, & n = 2.4 \end{cases}$
General expression	$n = c_1 Re_t^{c_2}$
Garside & Al-Dibouni equation	$\frac{n_L - n}{n - n_T} = \alpha Re_t^\beta$
Khan & Richardson	$\frac{n_L - n}{n - n_T} = \alpha Ar^\beta$

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

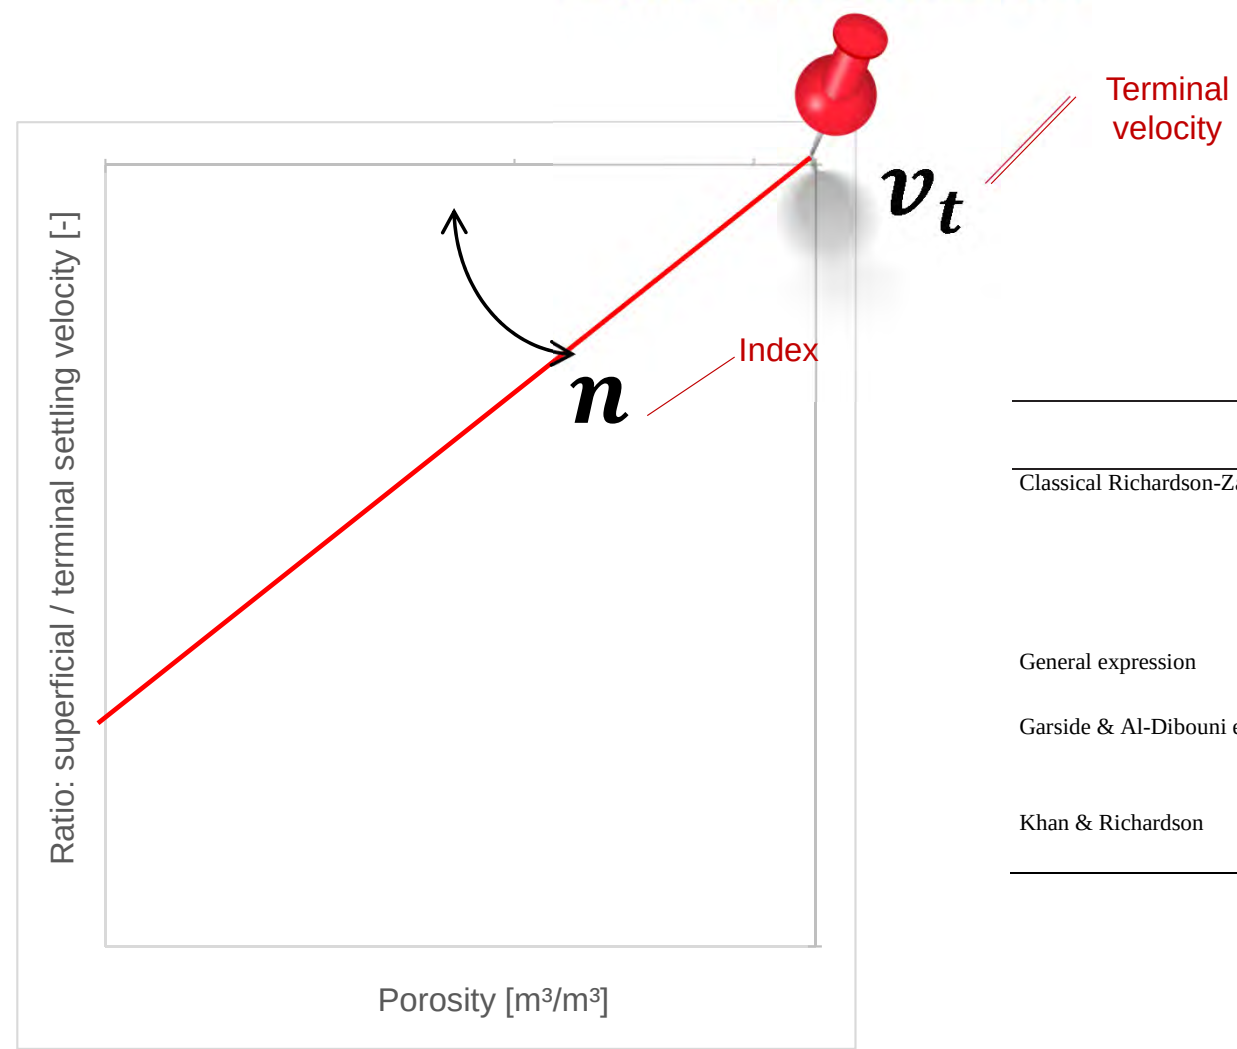


Formula	
Classical Richardson-Zaki equation	$n = \begin{cases} Re_t < 0.2, & n = 4.65 \\ 0.2 \leq Re_t < 1, & n = 4.4 Re_t^{-0.03} \\ 1 \leq Re_t < 500, & n = 4.4 Re_t^{-0.1} \\ Re_t \geq 500, & n = 2.4 \end{cases}$
General expression	$n = c_1 Re_t^{c_2}$
Garside & Al-Dibouni equation	$\frac{n_L - n}{n - n_T} = \alpha Re_t^\beta$
Khan & Richardson	$\frac{n_L - n}{n - n_T} = \alpha Ar^\beta$


Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

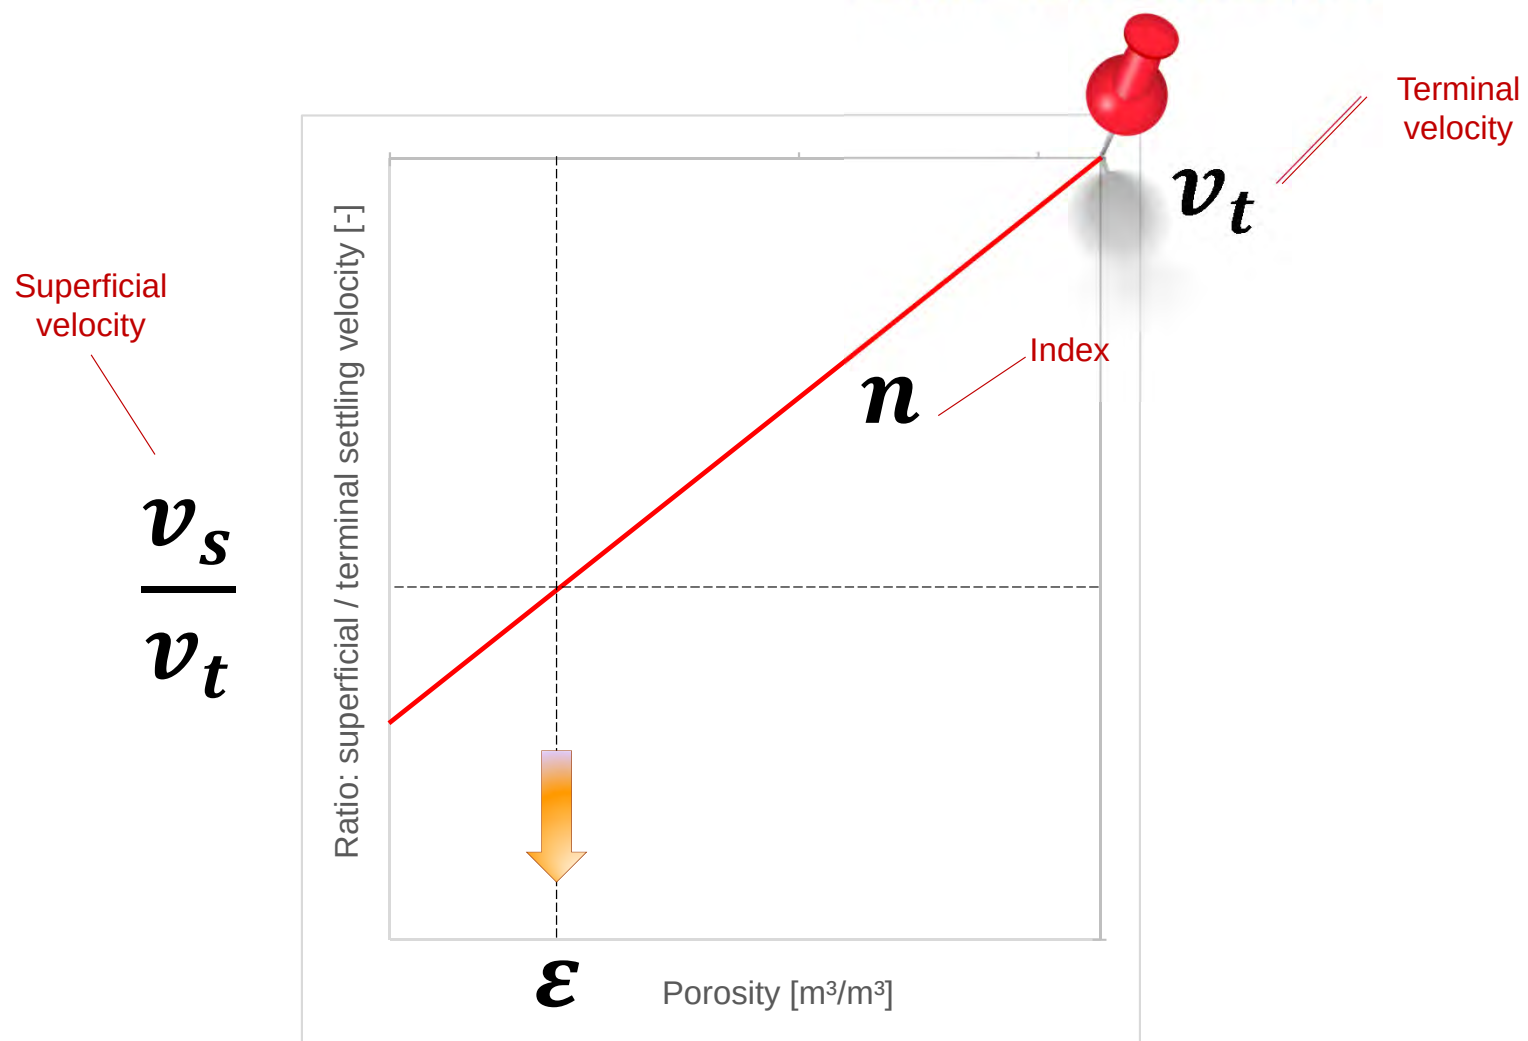


Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

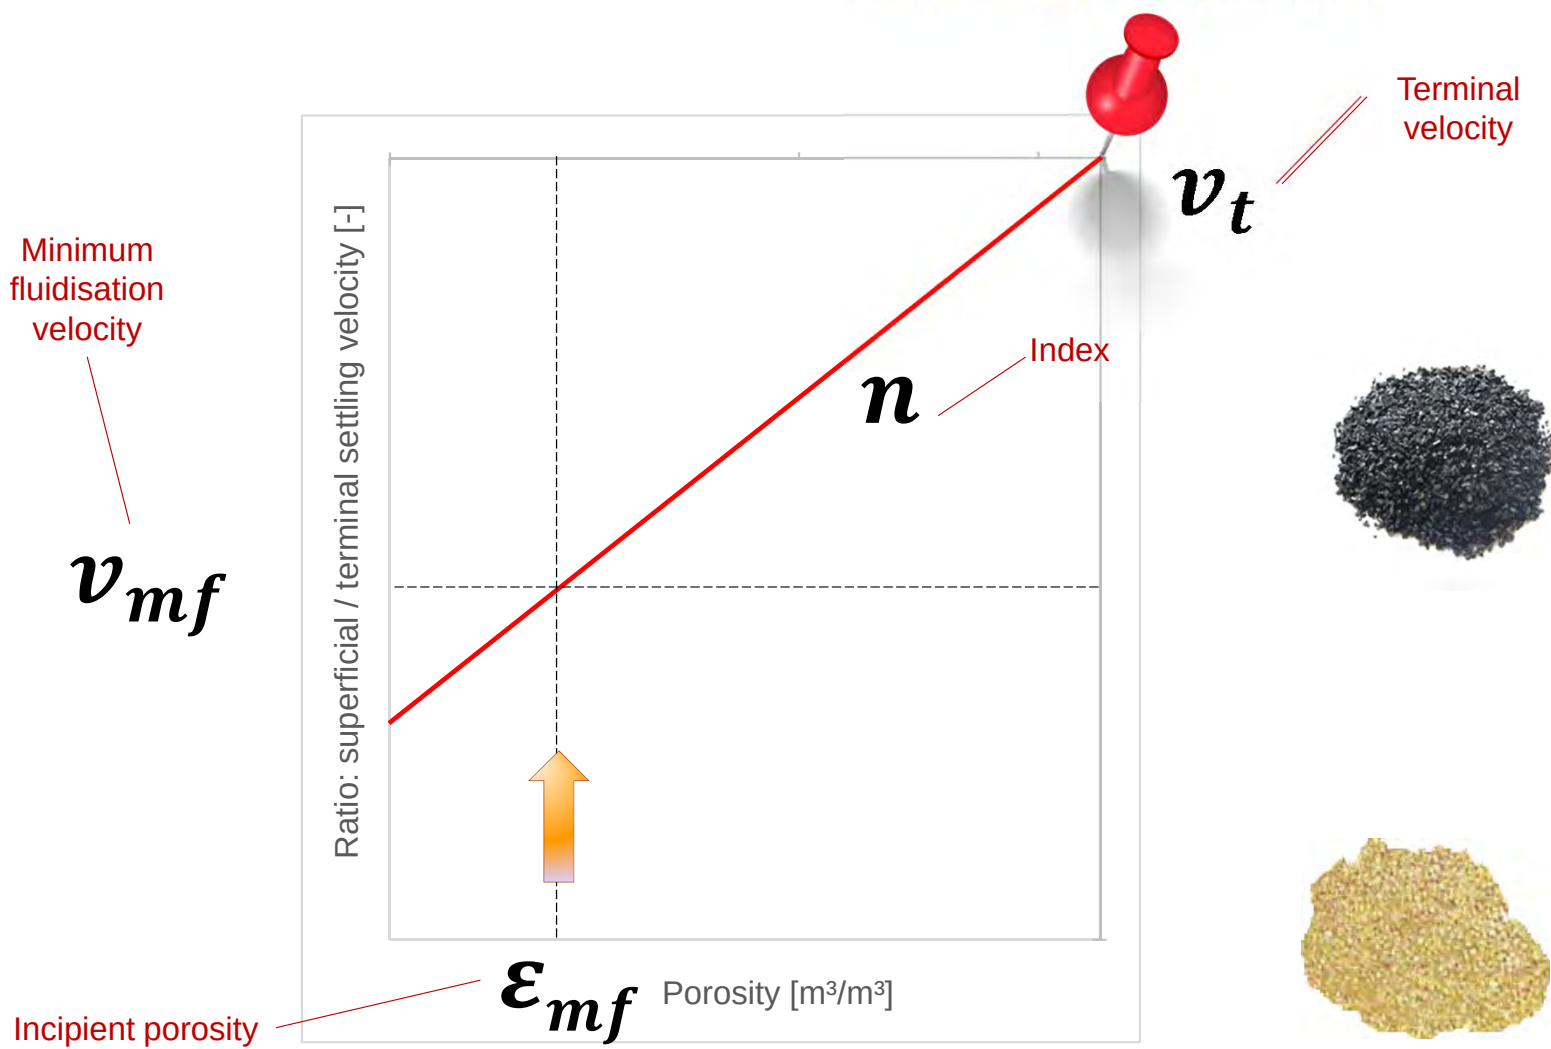

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

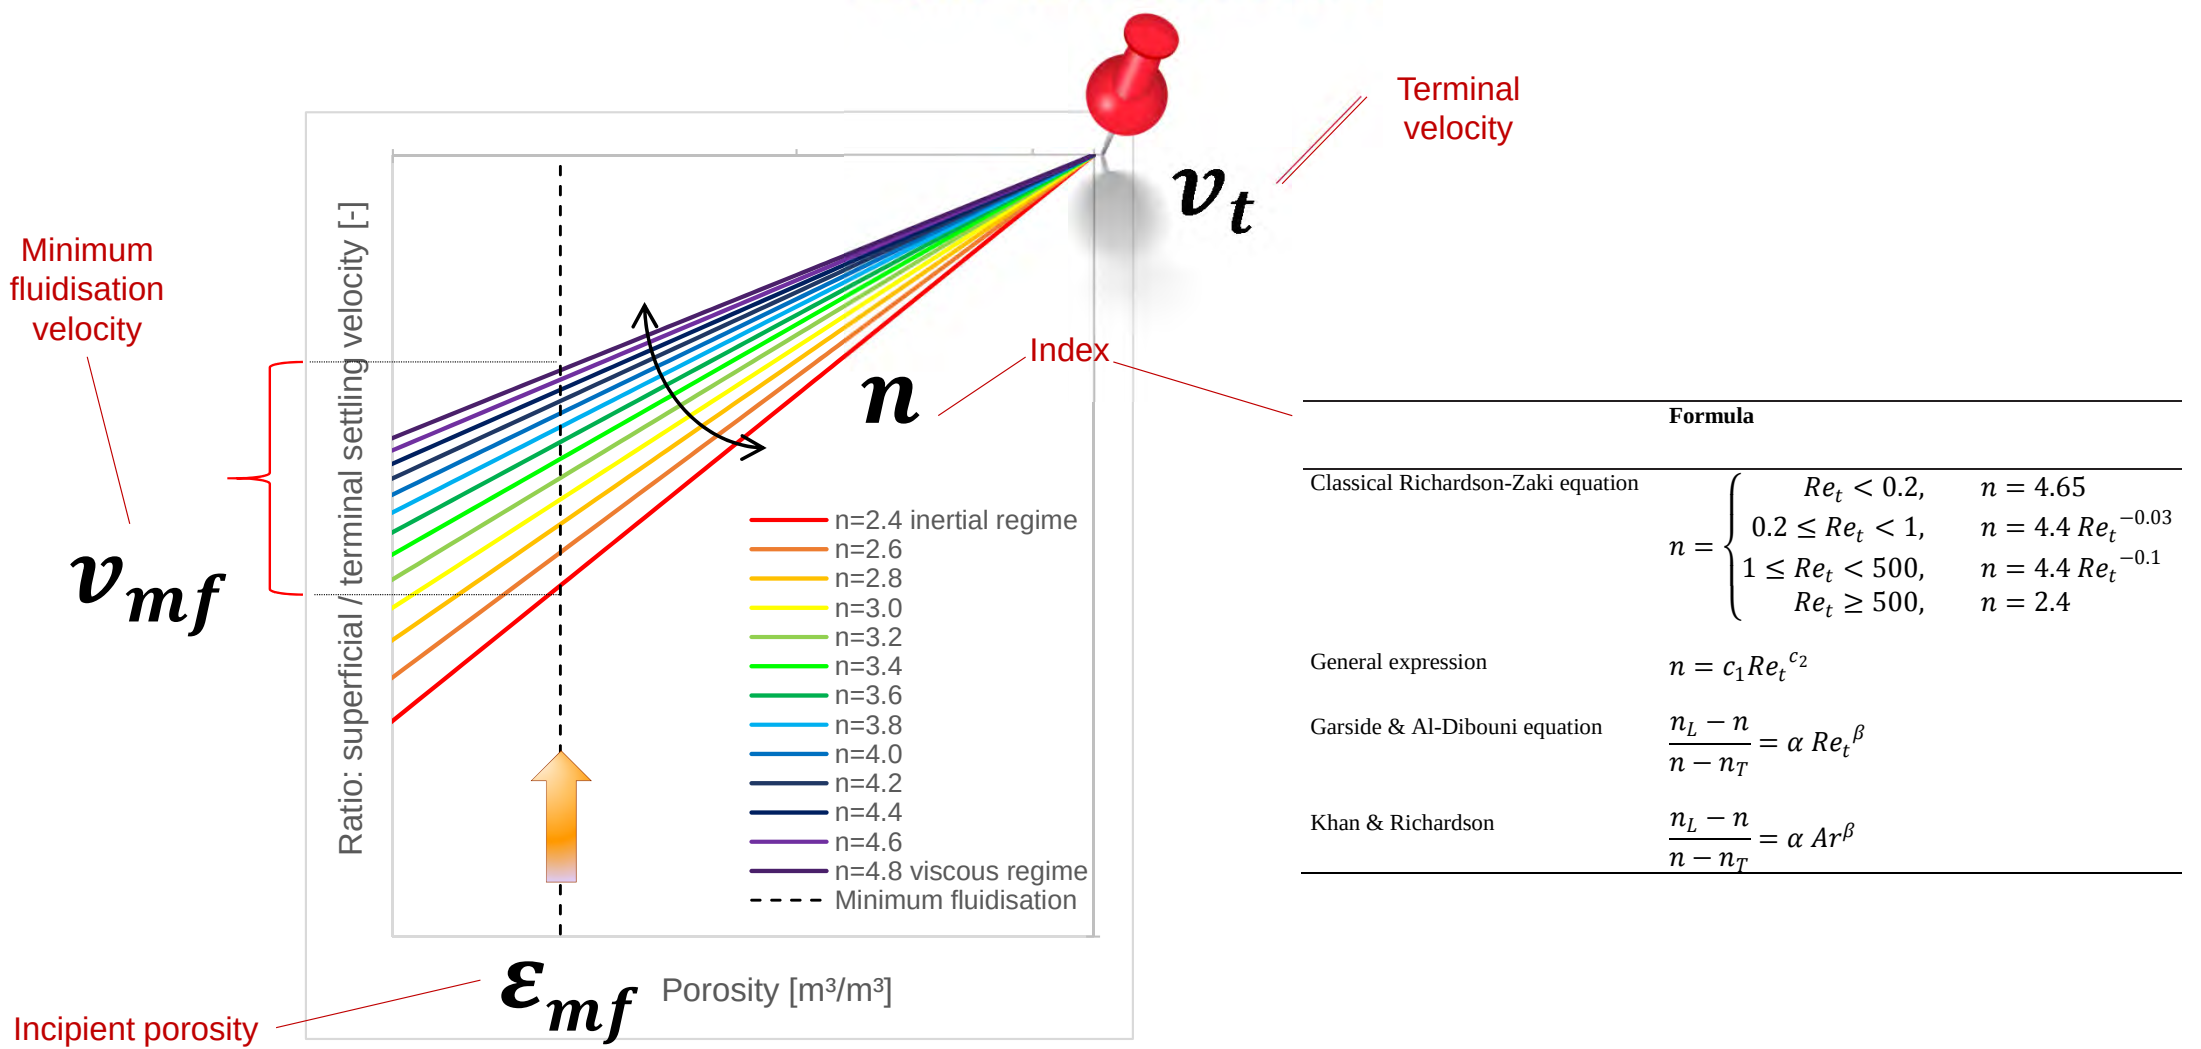


Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

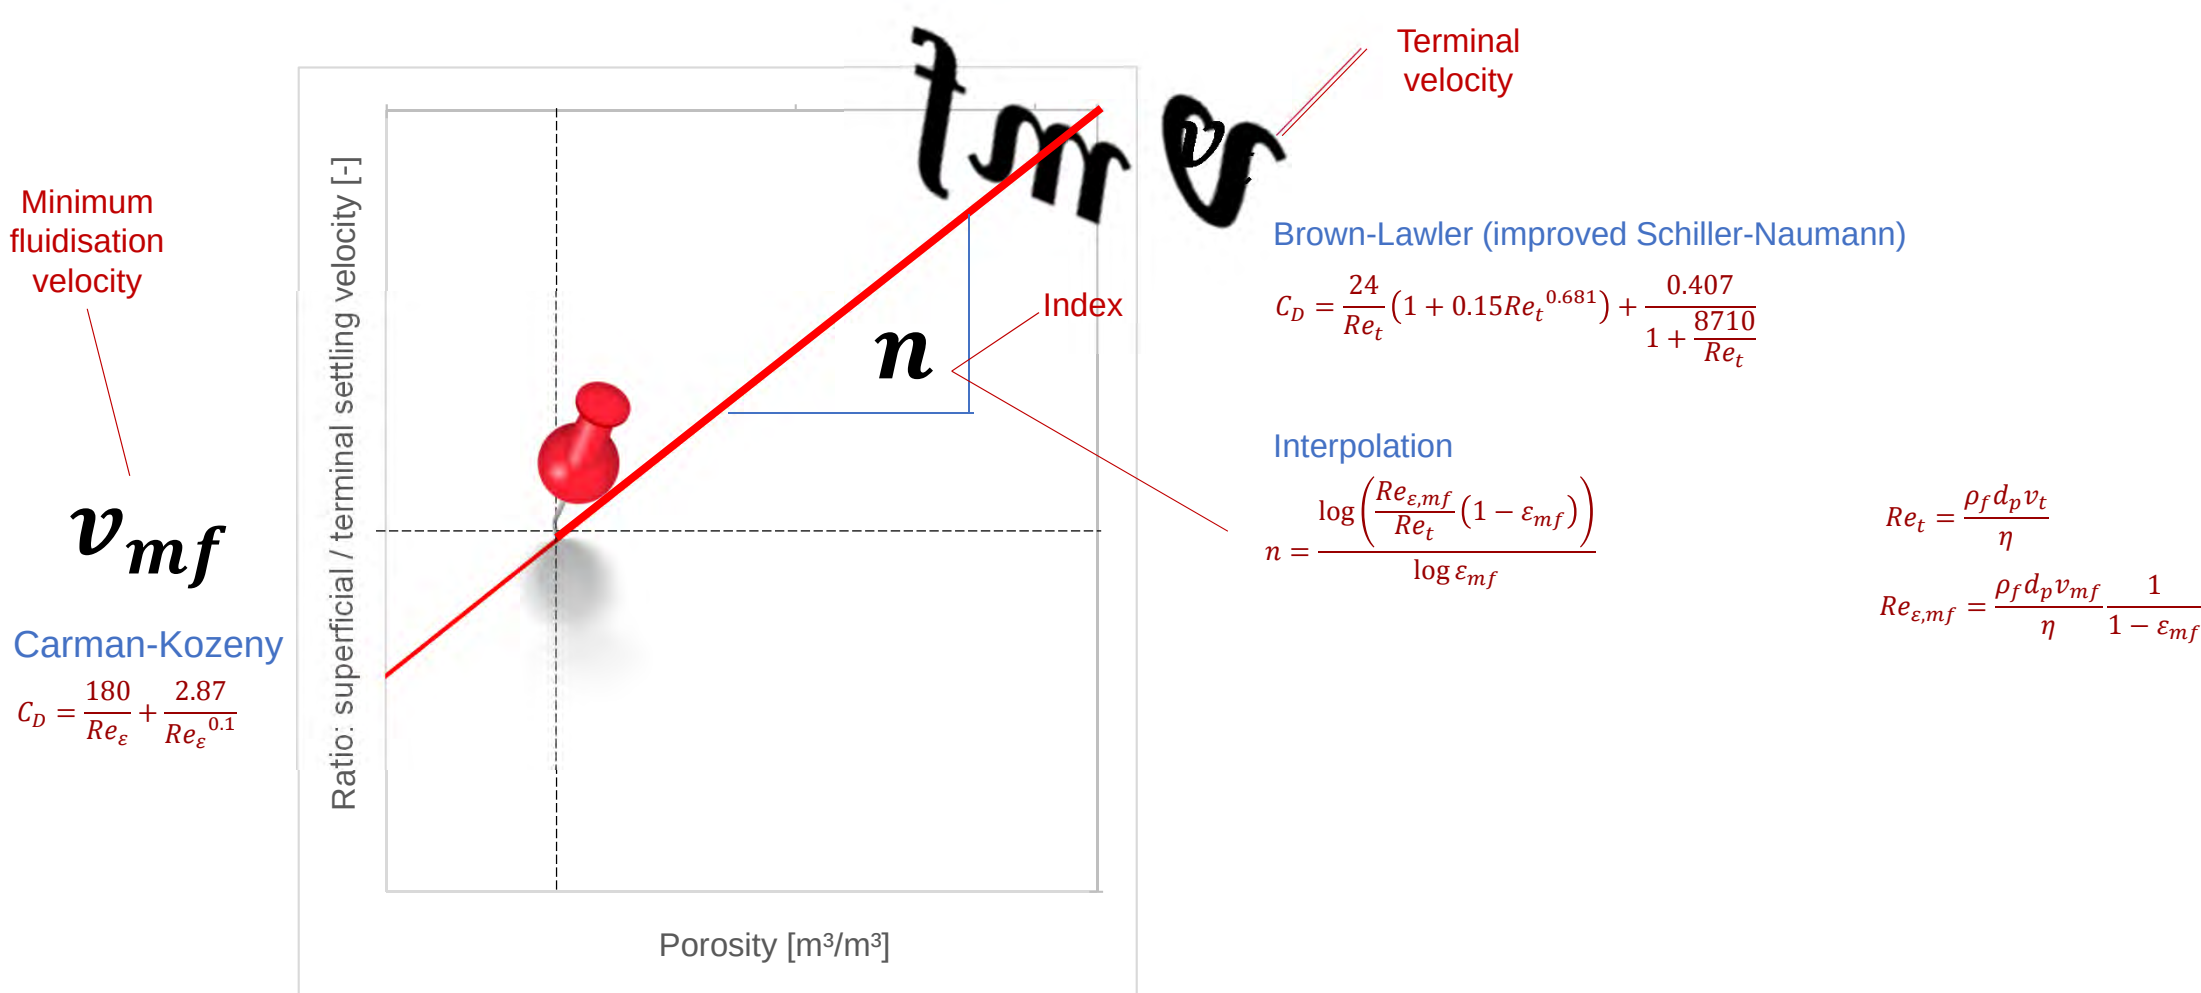

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Starting point: most popular fluidisation model
- ✓ Reference: Richardson-Zaki (1954)
- ✓ Model analysis: influence of parameters
- ✓ **Introduction: hydraulic model components**
- ✓ Experiments: pilot plant research
- ✓ Particles: CaCO₃ pellets, garnet sand, crushed calcite
- ✓ Data matrix: (grain size, temperature, water flow)
- ✓ Validation: data comparison

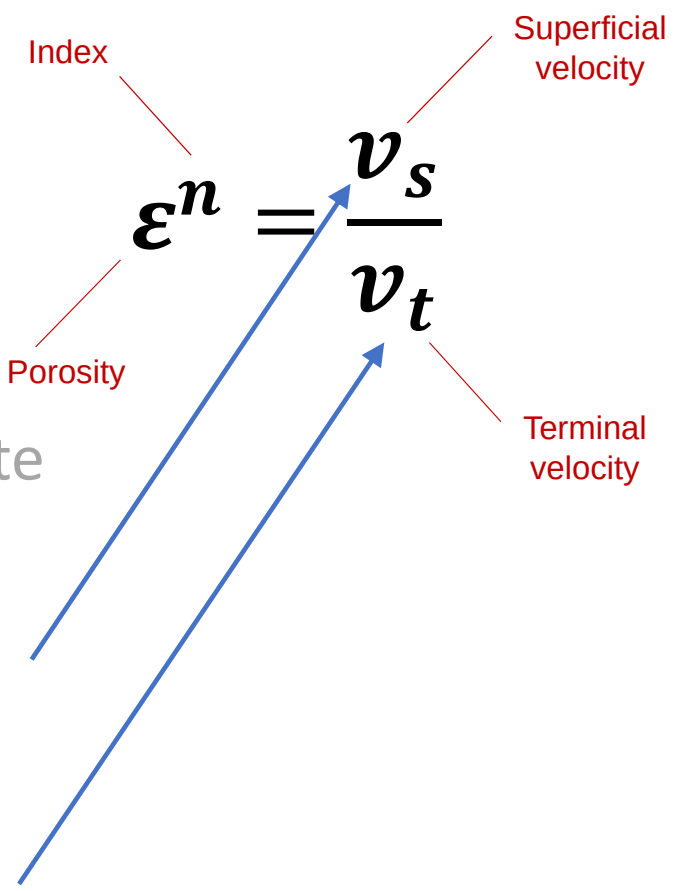

Carman-Kozeny (at minimum fluidisation)

$$C_D = \frac{180}{Re_\epsilon} + \frac{2.87}{Re_\epsilon^{0.1}}$$


Brown-Lawler (at terminal settling)

$$C_D = \frac{24}{Re_t} (1 + 0.15 Re_t^{0.681}) + \frac{0.407}{1 + \frac{8710}{Re_t}}$$

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Starting point: most popular fluidisation model
- ✓ Reference: Richardson-Zaki (1954)
- ✓ Model analysis: influence of parameters
- ✓ Introduction: hydraulic model components
- ✓ **Experiments: pilot plant research**
- ✓ Particles: CaCO_3 pellets, garnet sand, crushed calcite
- ✓ Data matrix: (grain size, temperature, water flow)
- ✓ Validation: data comparison

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

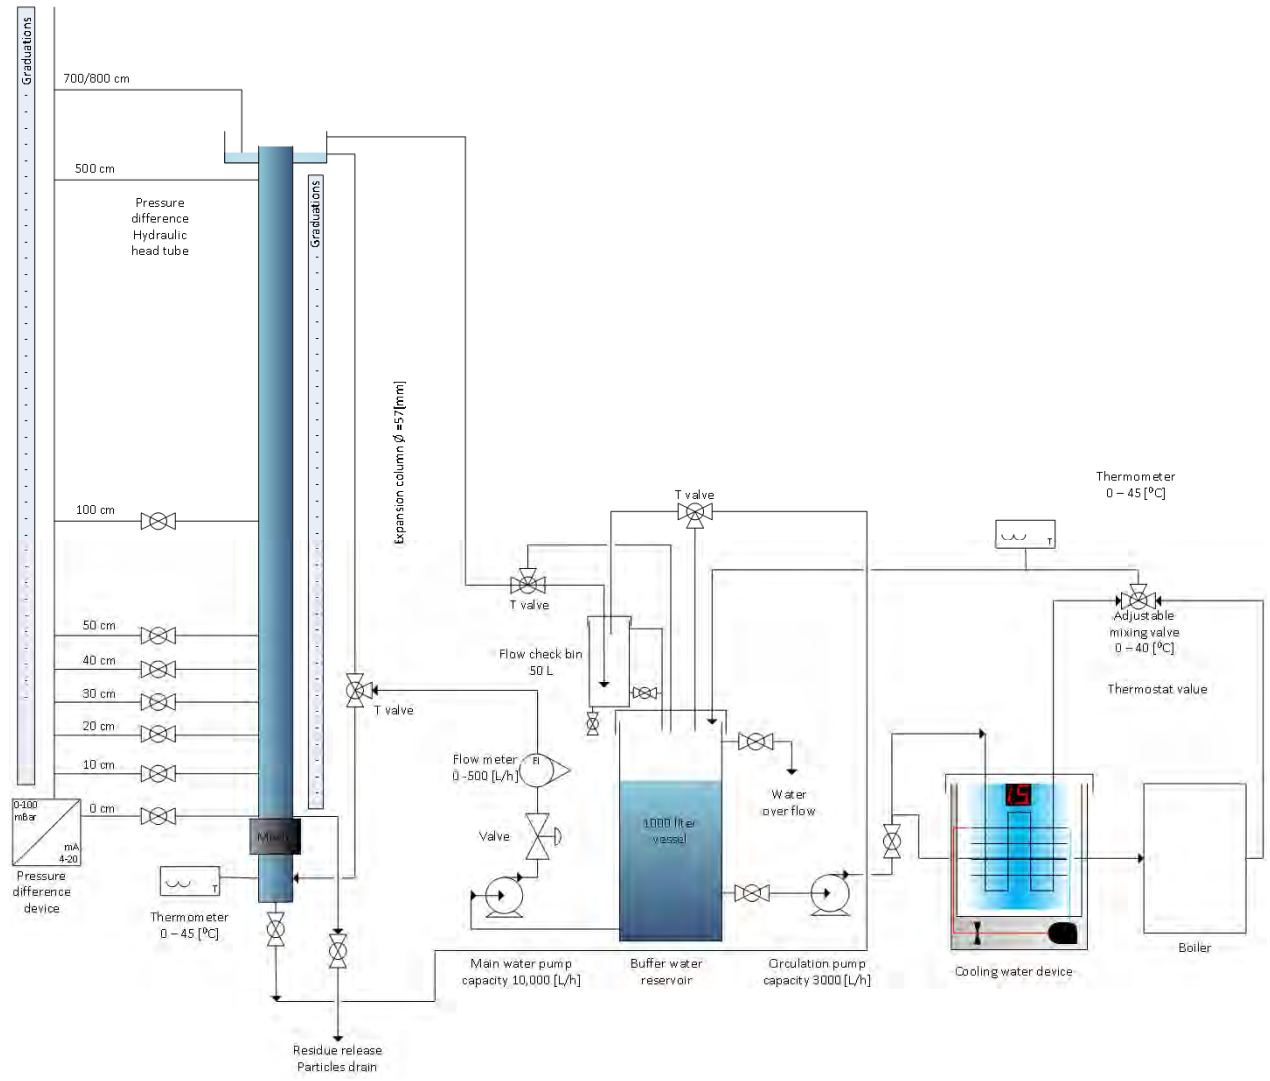


Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Starting point: most popular fluidisation model
- ✓ Reference: Richardson-Zaki (1954)
- ✓ Model analysis: influence of parameters
- ✓ Introduction: hydraulic model components
- ✓ Experiments: pilot plant research
- ✓ **Particles: CaCO_3 pellets, garnet sand, crushed calcite**
- ✓ Data matrix: (grain size, temperature, water flow)
- ✓ Validation: data comparison



1 mm





1.4 - 1.7 mm calcite pellets



0.425 - 0.5 crushed calcite

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Starting point: most popular fluidisation model
 - ✓ Reference: Richardson-Zaki (1954)
 - ✓ Model analysis: influence of parameters
 - ✓ Introduction: hydraulic model components
 - ✓ Experiments: pilot plant research
 - ✓ Particles: CaCO_3 pellets, garnet sand, crushed calcite
 - ✓ Data matrix: (grain size, temperature, water flow)
 - ✓ Validation: data comparison
- ✓ 10 sieved fractions
($0.4 < d_z < 2.0 \text{ mm}$)
 - ✓ 4 temperatures
(5, 15, 25, 35 °C)
 - ✓ 25 ascending water flows
(0-180 m/h)



Contents

- o Introduction
- o Objectives
- o Materials and methods
- **Results and discussion**
- o Conclusions
- o Questions



waternet

waterschap amstel gooi en vecht
gemeente amsterdam

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Experiments: 76 fluidisation characteristics
- ✓ Results: model (implicit) and simplified model (explicit)
- ✓ Application: drinking water pellet softening
- ✓ Model accuracy improvement

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Experiments: 76 fluidisation characteristics
- ✓ Results: model (implicit) and simplified model (explicit)
- ✓ Application: drinking water pellet softening
- ✓ Model accuracy improvement


$$\frac{4.8 - n}{n - 2.4} = 0.015 Ar^{0.5}$$

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

$$\varepsilon^n = \frac{v_s}{v_t}$$





$$Re_t = \frac{\rho_f d_p v_t}{\eta}$$

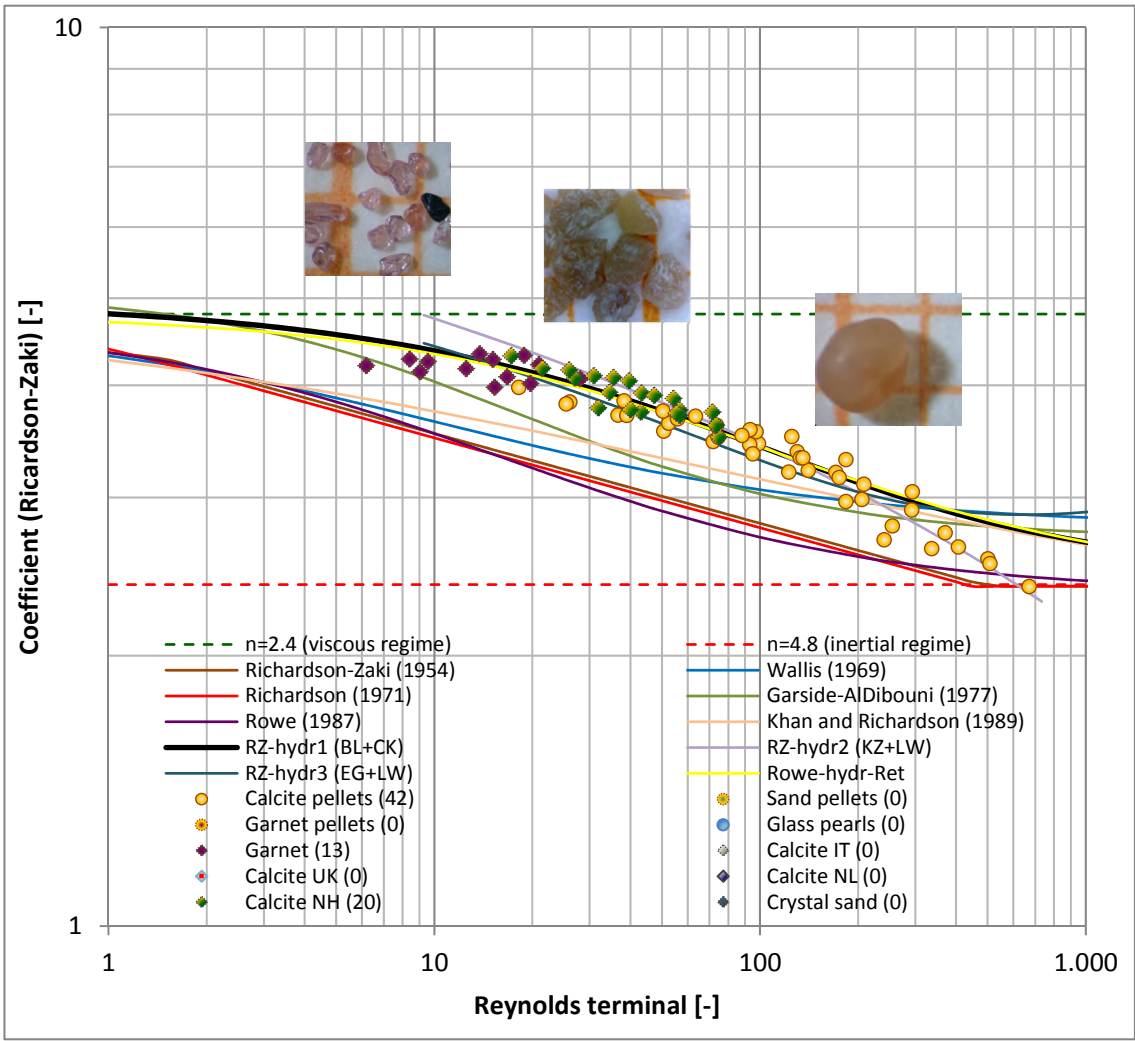

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Experiments: 76 fluidisation characteristics
- ✓ Results: model (implicit) and simplified model (explicit)
- ✓ Application: drinking water pellet softening
- ✓ Model accuracy improvement

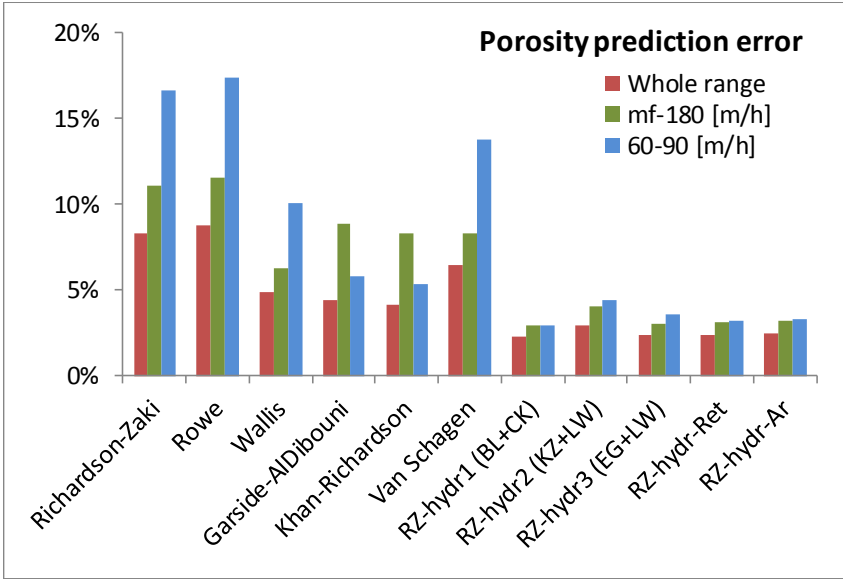
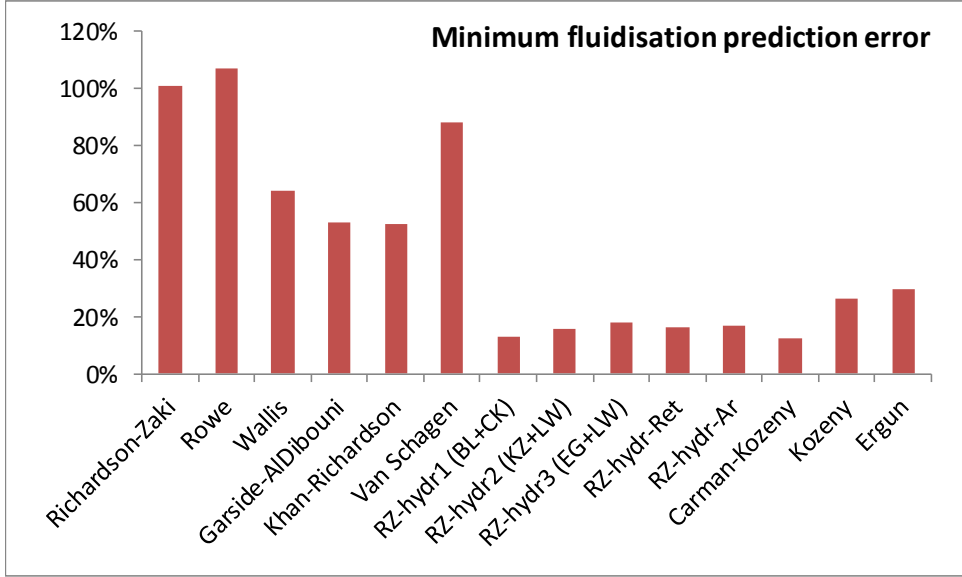


Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ Experiments: 76 fluidisation characteristics
- ✓ Results: model (implicit) and simplified model (explicit)
- ✓ Application: drinking water pellet softening

✓ **Model accuracy improvement**
minimum fluidisation >100%→12%

porosity >15%→3%

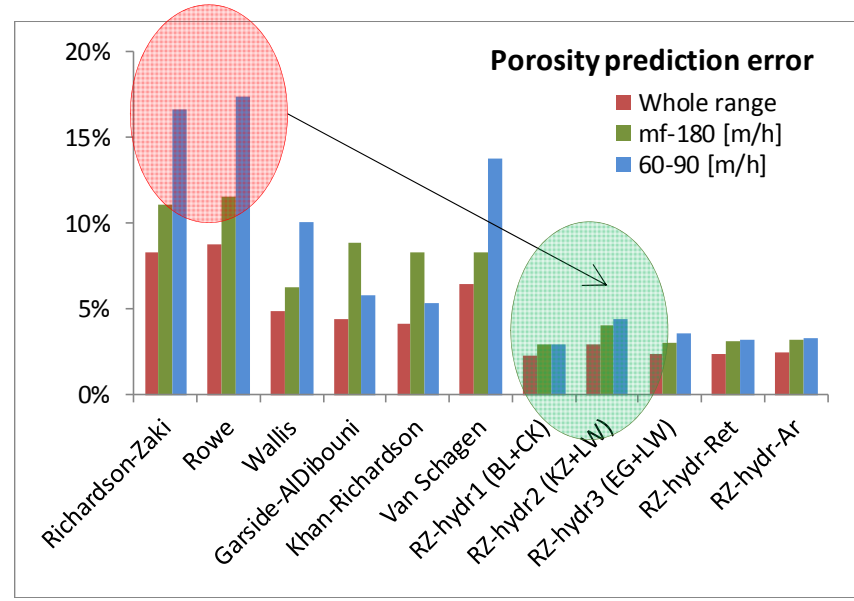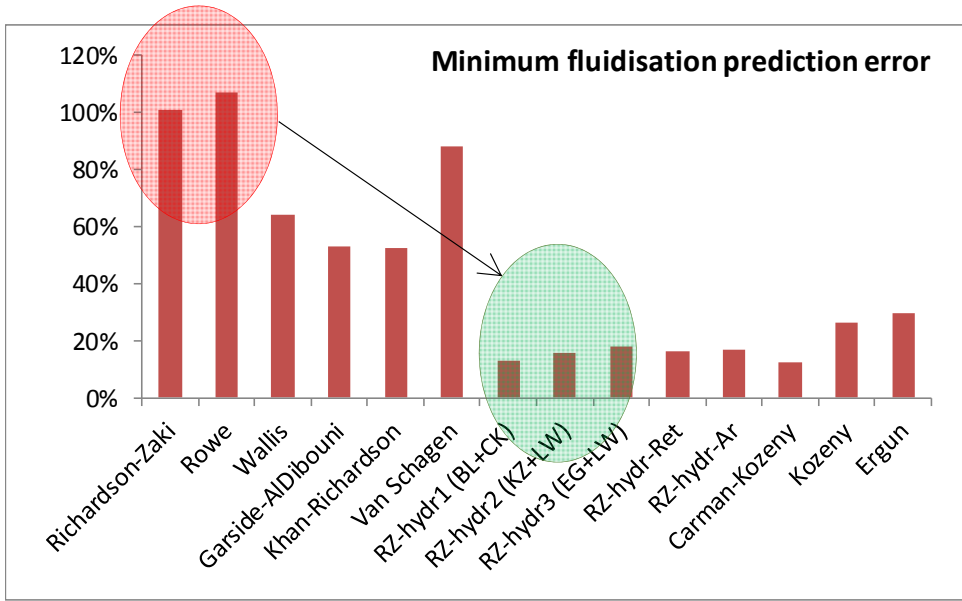



Contents

- o Introduction
- o Objectives
- o Materials and methods
- o Results and discussion
- **Conclusions**
- o Questions

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ RZ models can be improved based on hydraulics principles i.e. 3 points (ϵ, v)
 $(0,0)$ (ϵ_{mf}, v_{mf}) $(\epsilon \rightarrow 1, v_t)$
- ✓ Porosity can be predicted more accurately
- ✓ Recommendations:
 - Model enhancement (more general)
 - Identification of irregularly shaped particles
 - Implications for specific surface area (Interfacial Area Density)

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

- ✓ RZ models can be improved based on hydraulics principles i.e. 3 points (ε, v)
 $(0,0)$ $(\varepsilon_{mf}, v_{mf})$ $(\varepsilon \rightarrow 1, v_t)$
- ✓ Porosity can be predicted more accurately
- ✓ Recommendations:
 - Model enhancement (more general)
 - Identification of irregularly shaped particles
 - Implications for specific surface area (Interfacial Area Density)



Contents

- o Introduction
- o Objectives
- o Materials and methods
- o Results and discussion
- o Conclusions
- o Questions**



waternet

waterschap amstel gooi en vecht
gemeente amsterdam

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics



ELSEVIER

Powder Technology

Available online 6 November 2018

In Press, Accepted Manuscript ?



Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

O.J.I. Kramer ^{a, b, c, d}  , P.J. de Moel ^{a, e}, E.T. Baars ^c, W.H. van Vugt ^d, J.T. Padding ^b, J.P. van der Hoek ^{a, c}

 **Show more**

<https://doi.org/10.1016/j.powtec.2018.11.018>

Under a Creative Commons license

[Get rights and content](#)

[open access](#)

DOI: 10.1016/j.powtec.2018.11.018

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

Thank you for your attention





Personalia

Name: Onno Kramer

Phone.: 06-42147123

E-mail: onno.kramer@waternet.nl

Network: LinkedIn

Publications: TUDelft PureCycle , ResearchGate,



Waternet, Sector Drinking Water, Department, Production



HU University of Applied Sciences Utrecht, Institute for Life Science and Chemistry



Delft University of Technology

Faculty of Civil Engineering and Geosciences, Department Water Management, Section Sanitary Engineering, Research Group Drinking Water
Faculty of Mechanical, Maritime and Materials Engineering, Department Process and Energy, Section Intensified Reaction and Separation Systems



Optional for questions

A.R. Khan, J.F. Richardson, Fluid-particle interactions and flow characteristics of fluidized beds and settling suspensions of spherical particles, Chem. Eng. Commun. 78 (1989) 111–130. doi:10.1080/00986448908940189.

Chem. Eng. Comm. 1989, Vol. 78, pp. 111–130
Reprints available directly from the publisher.
Photocopying permitted by license only.
© 1989 Gordon and Breach Science Publishers S.A.
Printed in the United States of America

FLUID-PARTICLE INTERACTIONS AND FLOW
CHARACTERISTICS OF FLUIDIZED BEDS AND
SETTLING SUSPENSIONS OF SPHERICAL
PARTICLES

A.R. KHAN* and J.F. RICHARDSON

Department of Chemical Engineering
University College of Swansea
Singleton Park
Swansea SA2 8PP, UK

(Received October, 1987; in final form August 4, 1988)

The published correlations for the velocity-voidage relationship observed during fluidization and sedimentation of uniformly sized spherical particles in solid-liquid systems are compared with published experimental results. It is found that the expression suggested by Richardson and Zaki represents the experimental data well over a wide range of values of Galileo number ($10^{-2} < Ga < 10^{10}$) and voidage ($0.4 < \epsilon < 1$). Methods are given for predicting the constants in the expression as a function of the properties of the system, including wall effects.

KEYWORDS Fluidized beds Fluid-particle interactions Spherical particles.

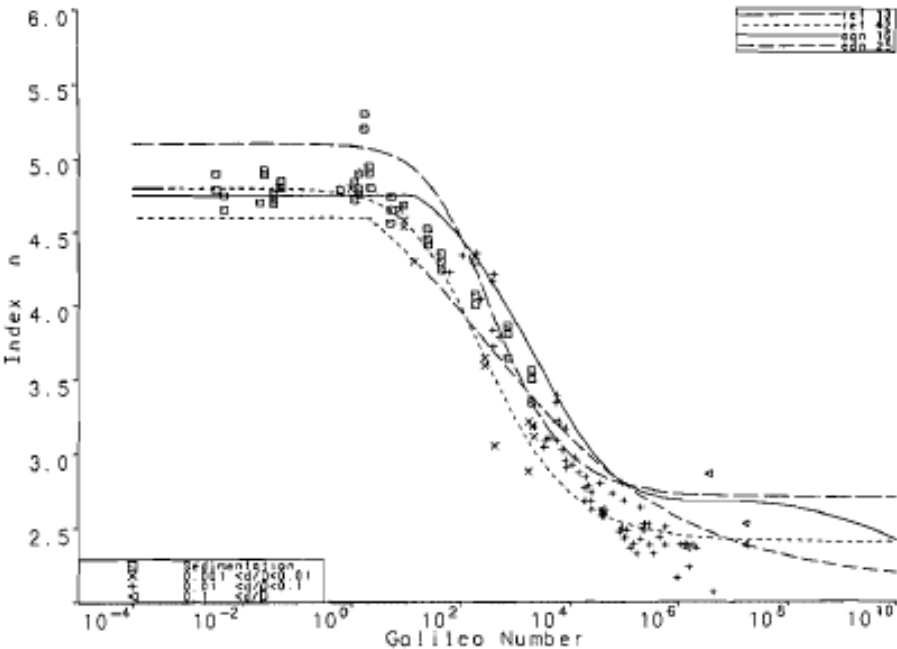


FIGURE 5 Comparison of published correlations with experimental values of index n .

J. Garside, M.R. Al-Dibouni, Velocity-voidage relationships for fluidization and sedimentation in solid-liquid systems, Ind. Eng. Chem. Process Des. Dev. 16 (1977) 206–214.
doi:10.1021/i260062a008.

Velocity–Voidage Relationships for Fluidization and Sedimentation
in Solid–Liquid Systems

John Garside* and Maan R. Al-Dibouni
Department of Chemical Engineering, University College London, London WC1E 7JE

Published experimental results for the velocity–voidage relationship observed during fluidization and sedimentation of uniformly sized spheres in solid–liquid systems are compared and new experimental results are presented. Predictions of various published correlations that are available to describe this relation are compared with these experimental results and the inadequacy of most of the correlations is demonstrated. New correlations are suggested. The most reliable of these is based on a logistic curve and can be represented by the equation $(U_R - A)/(B - U_R) = 0.06Re_t^{+0.2}$, where $A = \epsilon^{4.14}$ and $B = 0.8\epsilon^{7.28}$ for $\epsilon \leq 0.85$ or $B = \epsilon^{2.65}$ for $\epsilon > 0.85$. $U_R = U_s/U_t$ where U_s is the relative average velocity between particles and fluid, U_t is the terminal velocity of a single particle, Re_t is the particle Reynolds number based on U_t , and ϵ is the bed voidage.

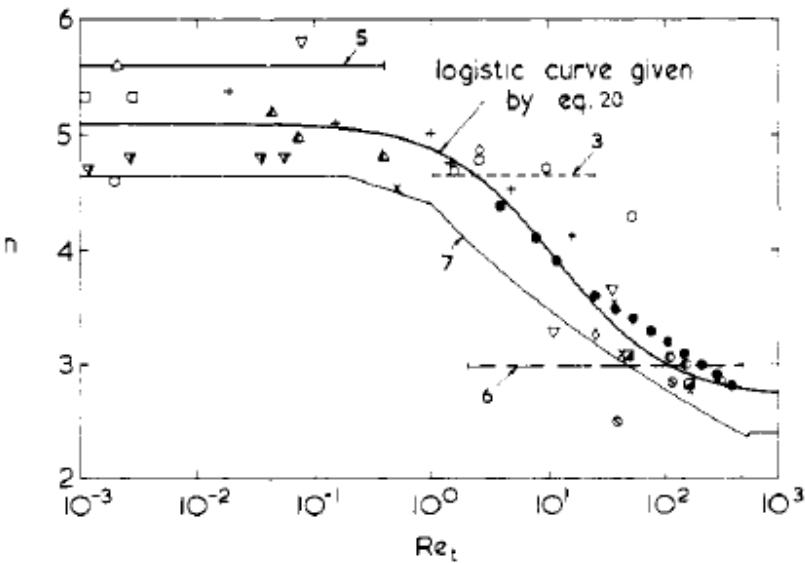


Figure 8. Variation of exponent n with Reynolds number. (See Table I for explanation of symbols; See Table III for key to different curves.)

A.D. Maude, R.L. Whitmore, A generalized theory of sedimentation, Br. J. Appl. Phys. 9 (1958) 477–482. doi:10.1103/RevModPhys.20.35.

A generalized theory of sedimentation

By A. D. MAUDE, B.Sc., Ph.D., A.Inst.P.,* and R. L. WHITMORE, B.Sc., Ph.D., A.Inst.P., Department of Mining and Fuels, University of Nottingham

[Paper first received 3 January, and in final form 25 June, 1958]

A theoretical relationship between the concentration and the sedimentation velocity of non-flocculated suspensions of particles is derived. It is shown that the settling velocity relative to that of a single particle in the suspension is $(1 - c)^\beta$ where β is a function of particle shape, size distribution and Reynolds number and c is the volume of solid per unit volume of suspension. The expression is shown to satisfy the experimental results of other workers. An empirical relationship between β and the Reynolds number is suggested.

1. INTRODUCTION

When a body falls through a fluid, it accelerates until it reaches a constant terminal velocity. This velocity is determined by the density of the fluid ρ_f , the density of the body ρ_s , the viscosity of the fluid η , the shape and orientation of the body and by some length characterizing the size of the body d . The velocity may also depend, to some extent, upon the size and shape of the containing vessel, but if this is large its influence may be neglected.

The problem becomes more complicated if many bodies are present and the system becomes a sedimenting suspension. When the bodies are more or less evenly dispersed throughout the fluid, their rate of fall is decreased, and it is of considerable practical interest to know the relation between the concentration of bodies and the magnitude of this decrease.

* Now at the City of Liverpool College of Technology.
VOL. 9, DECEMBER 1958

Many theoretical and empirical relations⁽¹⁻⁸⁾ have been proposed to solve this problem, but they suffer from various defects, in particular they lack generality. It would be of considerable practical value if an equation could be derived which would cover a wide range of particle shapes, size ranges and rates of fall, and in the following paper an attempt is made to do this.

2. FALL OF SPHERES AT LOW REYNOLDS NUMBER

Consider a mass of equi-velocity particles falling through a pure fluid. If v is the average volume of one particle, and g is the acceleration due to gravity, then the average force on one particle is $F = (\rho_s - \rho_f)gv$. If c is the volume of solid in unit form of suspension, then it may be shown from

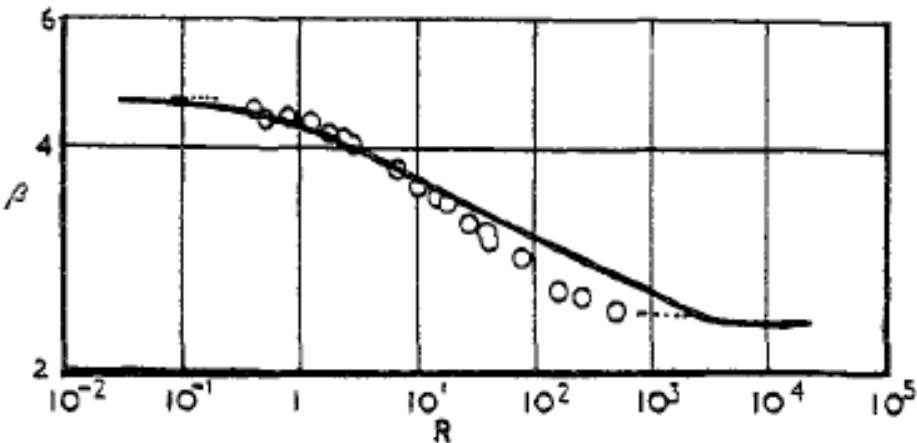


Fig. 2. Variation of the exponent of $(1 - c)$ with Reynolds number

J.F. Richardson, M.A. da S. Jerónimo, Velocity-voidage relations for sedimentation and fluidisation, Chem. Eng. Sci. 34 (1979) 1419–1422. doi:10.1016/0009-2509(79)85167-2.

Chemical Engineering Science Vol 34 pp 1419–1422
Pergamon Press Ltd 1979 Printed in Great Britain

Velocity-voidage relations for sedimentation and fluidisation

(Received 26 February 1979, accepted 30 April 1979)

A concentrated suspension of uniform particles settles at a lower rate than one of the particles in isolation in a large expanse of fluid. This phenomenon arises from a combination of factors. Thus in a suspension there is a significant upflow of displaced fluid, there are changed buoyancy effects and steeper velocity gradients at a given particle velocity relative to the fluid. The relation between sedimentation velocity and concentration in a suspension is similar to that between fluidisation velocity and concentration in a liquid solid system, and various empirical relations have been suggested. It is now proposed to examine how the constant in one of these relations can be calculated from the slope of the curve of drag coefficient against particle Reynolds number, and to show how calculated and experimental values compare.

THE EFFECT OF CONCENTRATION ON THE DRAG FORCE-VELOCITY RELATION FOR A SPHERE

For a single isolated particle settling in a fluid

$$\frac{\pi}{6} d^3 (\rho_s - \rho) g = \left(\frac{R'}{\rho u_0^2} \right) \rho u_0^2 \frac{\pi}{4} d^2 \quad (1)$$

J F RICHARDSON

Department of Chemical Engineering
University College, Swansea
Wales

M A da S JERÓNIMO

Centro de Engenharia Química da
Universidade do Porto
Portugal

from which

$$\left(\frac{R'}{\rho u_0^2} \right) \frac{u_0^2 d^2 \rho^2}{\mu^2} = \frac{2 d^3 g (\rho_s - \rho) \rho}{3 \mu^2} \quad (2)$$

i.e.

$$\frac{R'}{\rho u_0^2} \text{Re}_0^2 = \frac{2}{3} \text{Ga} \quad (3)$$

Suppose that in a suspension of voidage ϵ , the force on a particle at a given relative velocity is increased by some factor $f(\epsilon)$. Then

$$\frac{\pi}{6} d^3 (\rho_s - \rho) g = \left(\frac{R'}{\rho u^2} \right) \rho u^2 \frac{\pi}{4} d^2 f(\epsilon) \quad (4)$$

where $f(\epsilon)$ takes account of all interparticle effects including the increase in buoyancy force, and $(R'/\rho u^2)$ is still the friction factor for the isolated particle. Combining eqns (3) and (4)

$$f(\epsilon) = \frac{2}{3} \frac{\text{Ga}}{(R'/\rho u^2) \text{Re}^2} \quad (5)$$

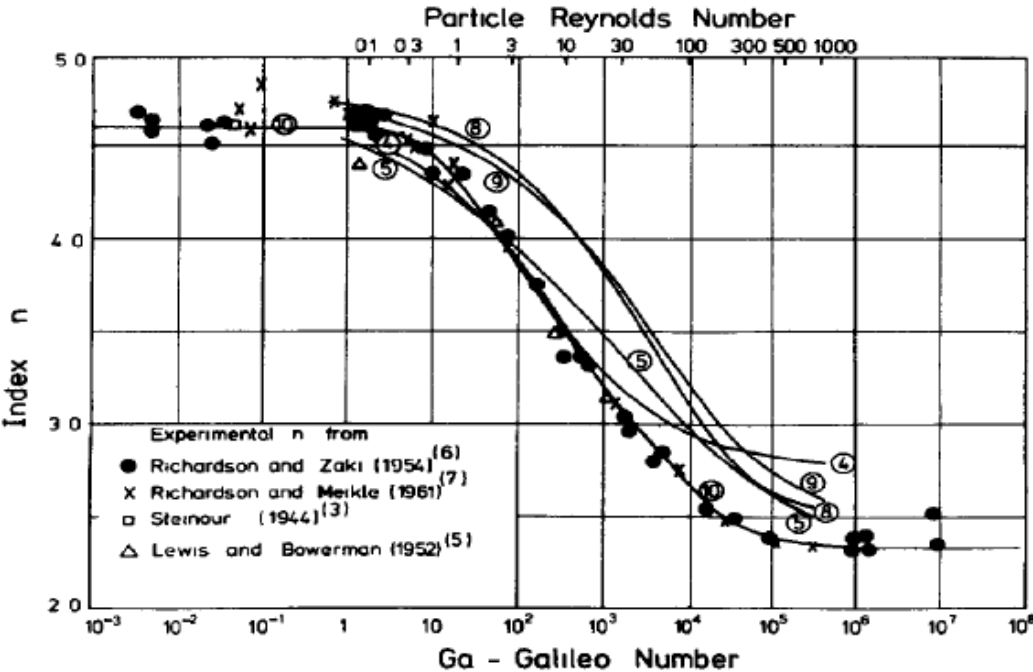


Fig 1 Experimental and calculated values of n as a function of Galileo and particle Reynolds numbers

P.N. Rowe, A convenient empirical equation for estimation of the Richardson-Zaki exponent, Chem. Eng. Sci. 43 (1987) 2795–2796. doi:[https://doi.org/10.1016/0009-2509\(87\)87035-5](https://doi.org/10.1016/0009-2509(87)87035-5).

Chemical Engineering Science, Vol. 42, No. 11, pp. 2795–2796, 1987.
 Printed in Great Britain. 0009–2509/87 \$3.00 + 0.00
 © 1987 Pergamon Journals Ltd.

A convenient empirical equation for estimation of the Richardson–Zaki exponent

(Received 1 April 1987; accepted 11 May 1987)

Wilhelm and Kwauk (1948) were the first to publish studies of the variation of voidage with fluid velocity for fluidized particles and to show that their results using water as the fluid (described as particulate fluidization) were correlated by an equation of the form

$$Re = Ke^n \tag{1}$$

Richardson and Zaki (1954) showed some of the logic behind this choice which can be conveniently written

$$u = u_t e^n \tag{2}$$

and made a systematic experimental study of how the

exponent, n (commonly referred to now as the Richardson–Zaki exponent) varies with Re_t . Their results, conveniently presented in Richardson (1971), for cases where particle size is small compared with vessel diameter, were described by four empirical equations covering different Reynolds number ranges. These equations are a little awkward to use particularly in the regions where they overlap and a continuous functions covering all values of Re_t is more useful especially when embodied in a general theory such as that of Foscolo and Gibilaro (1984).

Inspection of their data suggests it can be fitted by a logistic curve which is symmetrical and asymptotes to limiting values


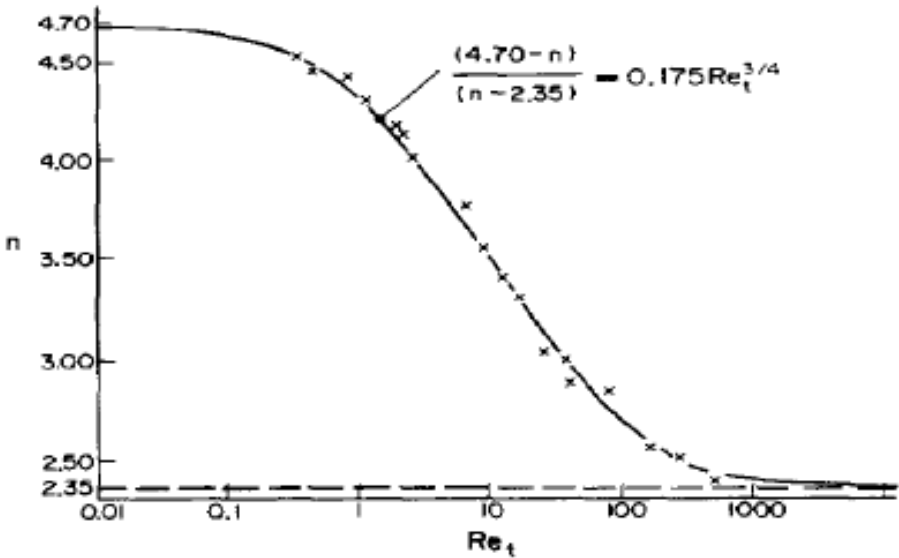


Fig. 1.

Linear relationship $\log v_s/v_t$ versus $\log \epsilon$ like Richardson-Zaki

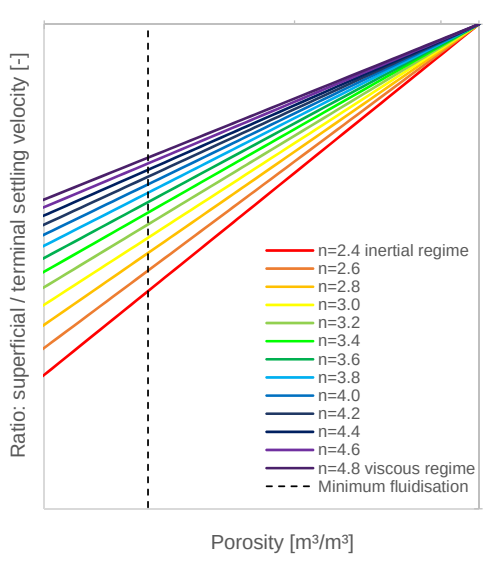

J. Fluid Mech. (1972), vol. 52, part 2, pp. 245–268
Printed in Great Britain

245

Sedimentation in a dilute dispersion of spheres

By G. K. BATCHELOR

Department of Applied Mathematics and Theoretical Physics,
University of Cambridge

(Received 26 August 1971)

The dispersion considered consists of spheres with random positions in a fluid under gravity. The volume fraction of the spheres is statistically homogeneous and isotropic. It is shown that the mean volume flux is proportional to the mean value of the velocity of the spheres. A systematic and rigorous derivation is presented by the choice of a quantity V whose mean value has the same long-range dependence as the mean of $U - V$ can be expressed. The result is that, correct to order c , the mean value of U is $U_0(1 - 6.55c)$, where U_0 is the velocity of a single sphere in unbounded fluid. The only assumption made in the calculation is that the centres of spheres in the dispersion take with equal probability all positions such that no two spheres overlap; arguments are

The results (5.3), (5.4) and (5.8), together with (3.14), show that the mean translational velocity of a sphere in a dispersion of identical rigid spheres with (small) volume concentration c is

$$\begin{aligned}\bar{U} &= U_0 + cU_0(-5.50 + 0.50 - 1.55) \\ &= U_0(1 - 6.55c),\end{aligned}\tag{5.9}$$

is difficult, and many observers have sought other kinds of average settling velocity, such as the speed of fall of the relatively sharp ‘top’ of the cloud of particles in a vessel. The available data of different kinds have been examined by Maude & Whitmore (1958) who concluded that the observed mean settling velocity of identical spheres moving with small Reynolds number is best represented, over a wide range of values of c including small values, by a relation of the form

$$\bar{U} = U_0(1 - c)^\beta,$$

A generalized theory of sedimentation

By A. D. MAUDE, B.Sc., Ph.D., A.Inst.P.,* and R. L. WHITMORE, B.Sc., Ph.D., A.Inst.P., Department of Mining and Fuels, University of Nottingham

[Paper first received 3 January, and in final form 25 June, 1958]

A theoretical relationship between the concentration and the sedimentation velocity of non-flocculated suspensions of particles is derived. It is shown that the settling velocity relative to that of a single particle in the suspension is $(1 - c)^\beta$ where β is a function of particle shape, size distribution and fluid properties. The expression for β is derived for spheres and for a general case.

Thus equation (16) becomes

$$\frac{F\rho_i}{\eta^2} \propto \left(\frac{U\rho_i d}{\eta}\right)^m (1 - c)^\alpha$$


which gives

$$U = U_0(1 - c)^{\alpha/m}$$


G. K. Batchelor, 1972, Sedimentation in a dilute dispersion of spheres, *Journal of Fluid Mechanics*, Volume 52, Issue 2, pp. 245-268, <https://doi.org/10.1017/S0022112072001399>

A.D. Maude, R.L. Whitmore, A generalized theory of sedimentation, *Br. J. Appl. Phys.* 9 (1958) 477–482. doi:10.1103/RevModPhys.20.35.

Improvement of the Richardson-Zaki liquid-solid fluidisation model on the basis of hydraulics

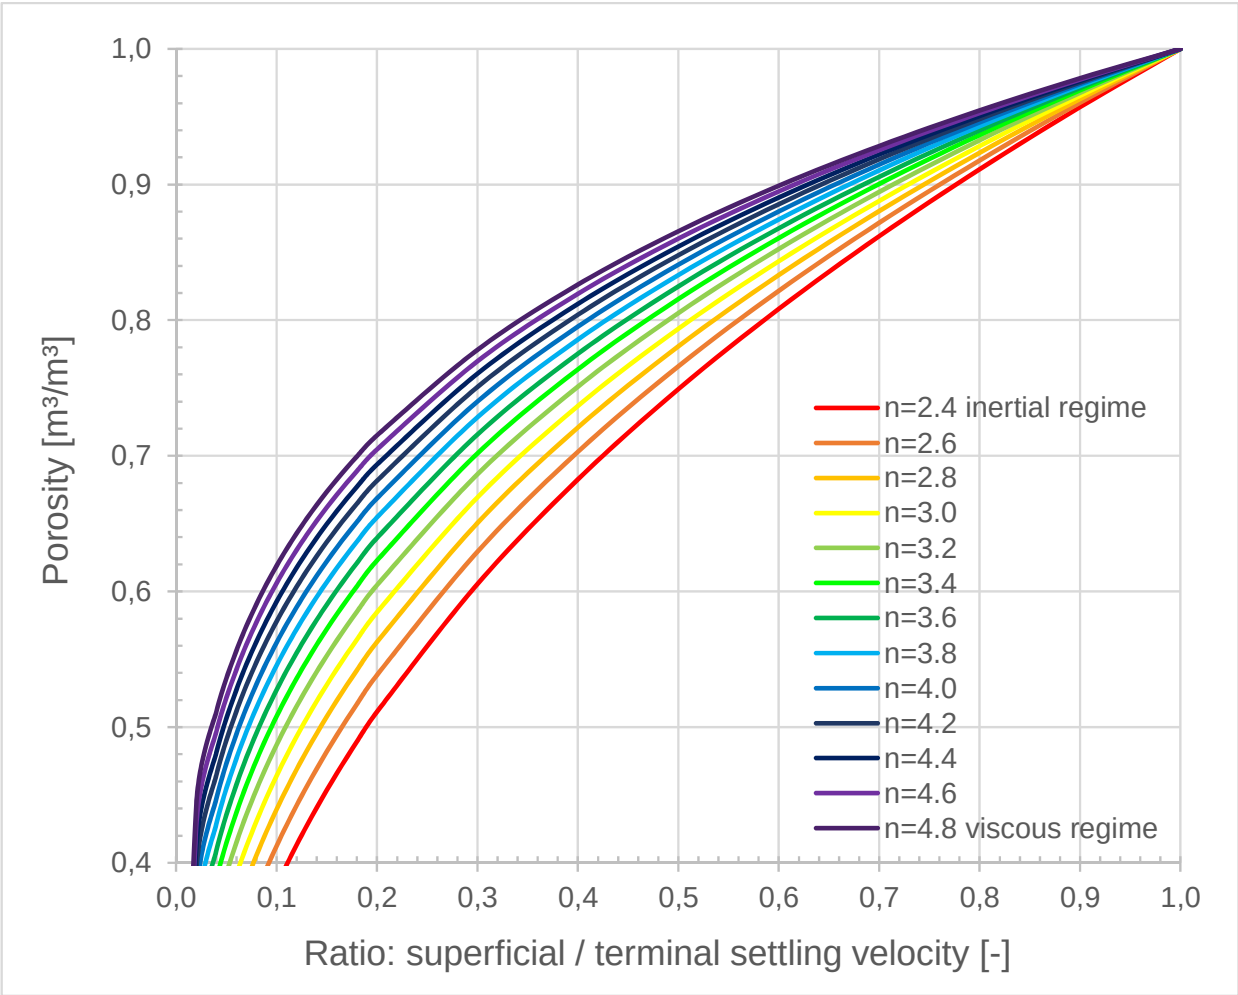

Richardson-Zaki (1954) experimental data

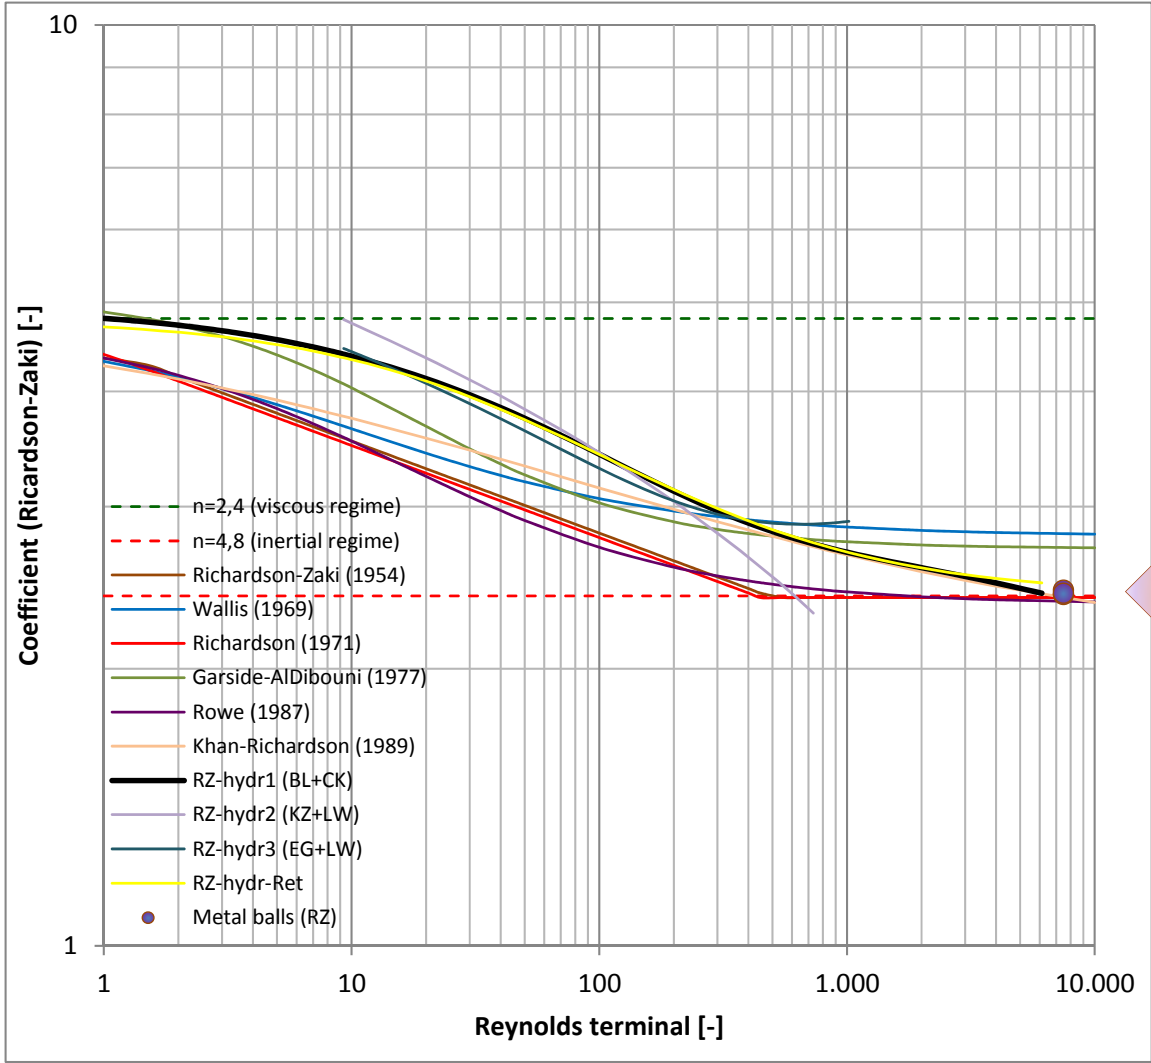



RZ data

SEDIMENTATION AND FLUIDISATION: PART I

By J. F. RICHARDSON, Ph.D.* (ASSOCIATE MEMBER) and W. N. ZAKI, Ph.D.*


SUMMARY

The present work is concerned with the study of sedimentation and liquid-solid fluidisation. In the former, suspended solids are falling under the influence of gravity in a stationary fluid, while in the latter, the particles are kept in suspension by an upward flow of liquid. The object is to examine experimentally the effect of concentration of suspended particles upon their rate of settlement, and to find a satisfactory method of correlating the results. The present part of the experimental work has been confined to uniformly sized spherical particles, greater than 100 microns in diameter. As reported elsewhere, an attempt has been made to develop an expression, from theoretical considerations, for the rate of settling of suspensions, and the experimental results obtained in the present work are compared with those predicted from this theory. The work has been extended for comparison to liquid-solid fluidised systems.

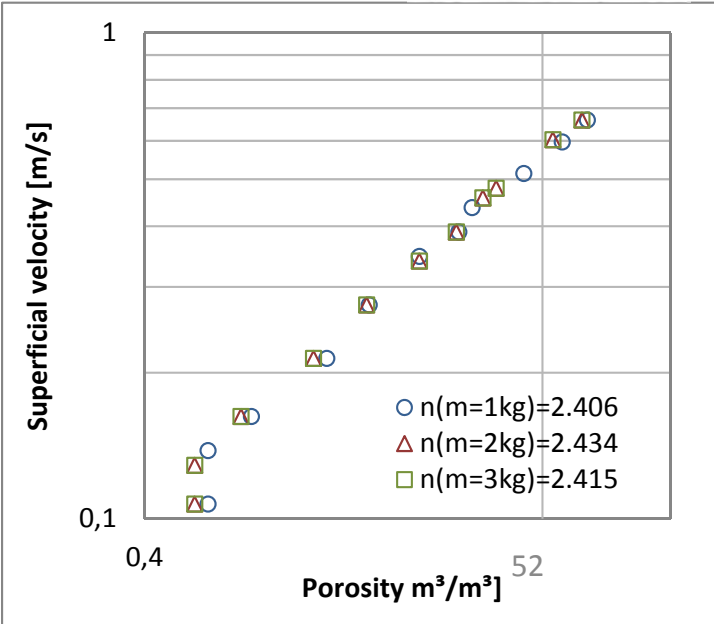

Drinking water softening (circular economy)

- ✓ Profit: re-use calcite as a seeding material
 - Cost reduction: 100.000 €/year (0,4%)
 - Sustainability: 40.000 eco-points/year (5%)
 - Valorisation: high market segments: glass/paper/capet...
 - Vision: possibilities introduction of process cycles in industry
 - So much to learn...
 - Legislation
 - Hydraulic
 - LCA calculation

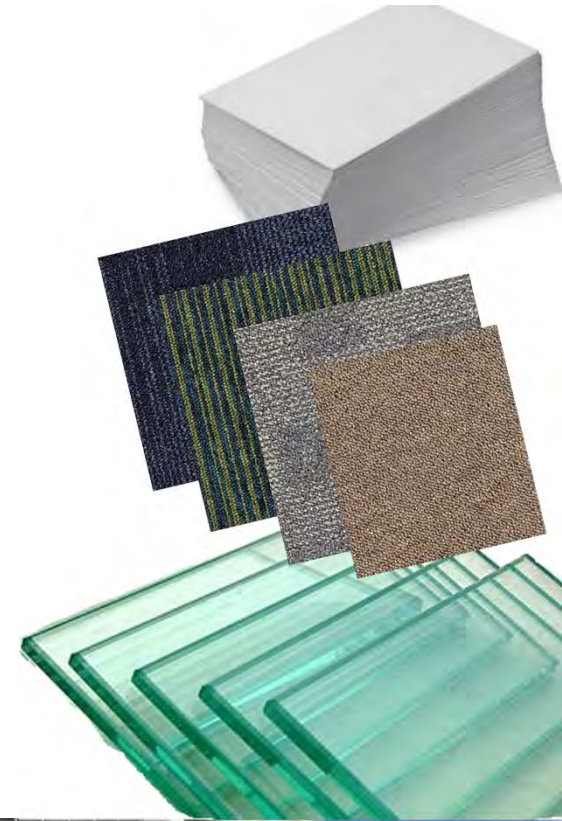

Circular economy in drinking water treatment: reuse of ground pellets as seeding material in the pellet softening process

M. J. A. Schetters, J. P. van der Hoek, O. J. I. Kramer, L. J. Kors,
L. J. Palmen, B. Hofs and H. Koppers



Eureqa®: The A.I.-Powered Modeling Engine

Eureqa automates the process of model building and interpretation, enabling you to extract answers from your data 90% faster.



Overview | In-Action | Features | Key Industries | Solutions

Overview

Automation. Speed. Industry Solutions.

Symbolic regression: Archimedes number $\rightarrow n_{RZ}$

Ar nRZ - Eureqa Pro - Academic

File Edit Project Tools View Help

Project: Ar nRZ Search: How to View Results

This Project

Dataset 1 Search 1 (running)

Enter Data Prepare Data Define Search Start Search Results Reports Secure Cloud

Best Solutions of Different Sizes

Size	Fit	Solution
20	0.205	$nRZ = 3.95 + 6.32e-6Ar + \frac{57}{Ar - 383} - 0.00638 \sqrt{Ar}$
26	0.202	$nRZ = 3.66 + \frac{232}{Ar} + 1.58e-7Ar \sqrt{Ar} - 4.45e-5Ar - 1.65e-10Ar^2$
28	0.201	$nRZ = 3.77 + 2.28e-7Ar \sqrt{Ar} + \frac{111995}{Ar^2} - 5.84e-5Ar - 2.56e-10Ar^2$
30	0.201	$nRZ = 3.77 + 2.27e-7Ar \sqrt{Ar} + \frac{111994}{Ar^2 - 2.63e3} - 5.83e-5Ar - 2.56e-10Ar^2$
18	0.210	$nRZ = 3.94 + 6.21e-6Ar + \frac{106}{Ar} - 0.00631 \sqrt{Ar}$
13	0.216	$nRZ = 4.05 + 8.68e-6Ar - 0.00752 \sqrt{Ar}$
11	0.218	$nRZ = 7.12 - 0.394 \log(3.1e3 + Ar)$
15	0.216	$nRZ = 4.06 + 8.95e-6Ar - 0.00762 \sqrt{Ar - 98.9}$

Solution Details (calculated on validation data)

Solution	$nRZ = 3.949 + 6.319e-6Ar + 57/(Ar - 382.9) - 0.006381 \sqrt{Ar}$
R^2 Goodness of Fit	0.94691871
Correlation Coefficient	0.97427472
Maximum Error	0.32099426
Mean Squared Error	0.0086841242
Mean Absolute Error	0.064523955

Plot Type: Solution Fit Plot (default)

Solutions Plotted Accuracy vs Complexity

Eureqa

Join the Forums...

Help & Forums

[Quick Start Guide](#)

[Video Tutorial](#)

[Technique Blog](#)

[Documentation](#)

[Help Forums](#)

CFD oppertunities

- Interstitial velocity versus terminal settling velocity
- Tortuosity versus ratio terminal and interstitial velocity
- Influence of the geometric representation (shape) on the specific surface area
- Particle interactions and collisions versus drag
- Relevant forces buoyancy, gravity and friction
- Surface roughness impact
- ...

Any suggestions are welcome.

Please mail me at: o.j.i.kramer@tudelft.nl

