

On characteristic values for calculating factors of safety for dyke stability

Varkey, D.; Hicks, M.A.; van den Eijnden, A.P.; Vardon, P.J.

DOI

[10.1680/jgele.19.00034](https://doi.org/10.1680/jgele.19.00034)

Publication date

2020

Document Version

Final published version

Published in

Geotechnique Letters

Citation (APA)

Varkey, D., Hicks, M. A., van den Eijnden, A. P., & Vardon, P. J. (2020). On characteristic values for calculating factors of safety for dyke stability. *Geotechnique Letters*, *10*(2), 353-359. <https://doi.org/10.1680/jgele.19.00034>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

On characteristic values for calculating factors of safety for dyke stability

D. VARKEY*, M. A. HICKS*, A. P. VAN DEN EIJNDEN* and P. J. VARDON*

Various simplified approaches are used to calculate the characteristic values of shear strength properties, which have then been used in deterministic stability analyses of a dyke cross-section. The calculated factors of safety are compared with the 5-percentile ‘system response’ of the dyke cross-section, calculated using the more exhaustive random finite-element method (RFEM), which is consistent with the requirements of Eurocode 7. The simplified methods accounting for variance reduction due to averaging of property values mostly give factors of safety within 10% of the RFEM solution, whereas the factor of safety based on the 5-percentile material properties is significantly over-conservative.

KEYWORDS: numerical modelling; slopes; statistical analysis

ICE Publishing: all rights reserved

NOTATION

a	factor accounting for the extent and quality of test results and levels of expertise
b_i	coefficient of variable X_i in the linearised performance function
COV	inherent coefficient of variation
COV _m	coefficient of variation due to measurement error
COV _s	coefficient of variation due to statistical error
COV _t	coefficient of variation due to transformation error
COV _{total}	total coefficient of variation
c'	effective cohesion
F	factor of safety
G	system response function
l_i	component of failure length in the i direction
X	variable
X_{extr}	expected extreme value of X
X_k	characteristic value of X
X_m	mean value of X
Γ^2	variance reduction factor
Γ_i^2	Γ^2 in the i direction; Γ^2 for X_i
γ	unit weight
η	percentile of the underlying distribution corresponding to X_k
θ	scale of fluctuation
θ_i	θ in the i direction
μ_i	mean of X_i
σ_i	standard deviation of X_i
Φ	standard normal cumulative distribution function
ϕ'	effective friction angle

INTRODUCTION

Engineering practice often uses characteristic soil property values, which are meant to account for (among other things) the spatial nature of soil variability with respect to the extent of the failure mechanism, and partial factors – for example, as in Eurocode 7 (EC7) (CEN, 2004). Although EC7 gives only limited guidance on determining characteristic values,

several simplified approaches have been proposed (Shen *et al.*, 2019). However, a more rigorous approach is the random finite-element method (RFEM) (Fenton & Griffiths, 2008), which combines random field theory with the finite-element method within a Monte-Carlo framework (Griffiths *et al.*, 2009; Hicks & Spencer, 2010). In particular, Hicks *et al.* (2019) used RFEM to account for spatial variability of soil properties in the reliability-based assessment and re-design of a dyke in the Netherlands. The assessment revealed that the factor of safety did not meet national safety requirements. However, it resulted in a 48% higher factor of safety compared to that obtained using a simple interpretation of EC7 based on 5-percentile property values, and thereby led to a less intrusive and more economic re-design.

This paper uses various simplified approaches to determine characteristic soil property values for the dyke cross-section analysed by Hicks *et al.* (2019). These values have then been used in deterministic finite-element slope stability analyses, and the resulting factors of safety (F) compared with $F = 0.98$, the 5-percentile system response previously computed using RFEM.

CHARACTERISTIC VALUES AND DESIGN ACCORDING TO EC7

Section 2.4.5.2 of EC7 states that, if statistical methods are to be used in the derivation of characteristic values, clause (11) applies (Table 1). From this clause, it can be inferred that the characteristic value should be selected so as to give a minimum confidence level or reliability of 95% with respect to the system response, before application of partial factors. Hicks & Samy (2002), Hicks (2012) and Hicks & Nuttall (2012) investigated the implications of clause (11) and its footnote, and explained the relationship between them by relating the scale of fluctuation (θ) – that is, the distance over which soil property values are significantly correlated, with the length of the potential failure surface. They also introduced an ‘effective’ property distribution that can be back-figured from the response of the system/structure, as simply illustrated in Fig. 1 for a single material property (X) represented by a normal distribution. The mean and standard deviation of this ‘effective’ property distribution are generally lower than those of the underlying

Manuscript received 15 October 2019; first decision 7 April 2020; accepted 8 April 2020.


Published online at www.geotechniqueletters.com on 1 May 2020.

*Section of Geo-Engineering, Faculty of Civil Engineering and Geosciences, Delft University of Technology, Delft, The Netherlands.

Table 1. Clause (11) extracted from Section 2.4.5.2 of EC7

(11)	<p>If statistical methods are used, the characteristic value should be derived such that the calculated probability of a worse value governing the occurrence of the limit state under consideration is not greater than 5%.</p> <p>NOTE: In this respect, a cautious estimate of the mean value is a selection of the mean value of the limited set of geotechnical parameter values, with a confidence level of 95%; where local failure is concerned, a cautious estimate of the low value is a 5% fractile.</p>
------	---

Source: CEN (2004)

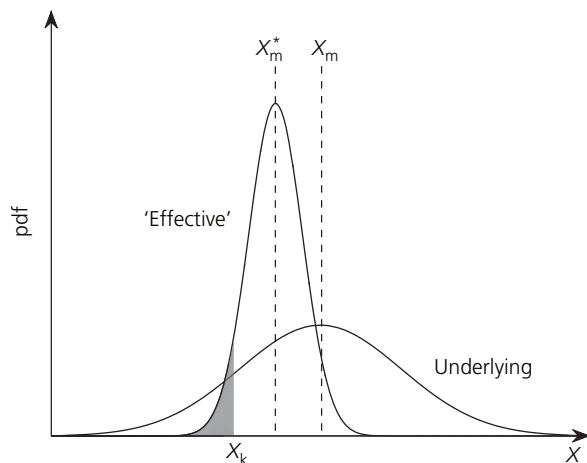**Fig. 1.** Derivation of characteristic property value satisfying EC7 (source: based on Hicks (2012) and Hicks *et al.* (2019))

property distribution, due to the respective influences of weaker zones on the failure mechanism and averaging of soil properties along the failure surface. Consequently, the 5 percentile of the effective distribution, which represents the characteristic value (X_k) defined in clause (11), generally corresponds to a percentile (η) of the underlying distribution that is higher than 5%.

Unfortunately, the derivation of X_k in Fig. 1 is not trivial, as demonstrated by Hicks & Samy (2002) and Hicks & Nuttall (2012), although some attempt has been made to approximate the process for simpler applications (Ching & Phoon, 2013). This is because it is a function of the underlying property distribution, the spatial correlation of properties and the problem being analysed. Moreover, the derivation becomes more complicated for multiple soil properties and multiple soil layers, because there are then many possible combinations of X_k that can give the same reliability. One solution is to use a simplified approach for

calculating the value of X_k , which can then, after application of partial factors, be used in deterministic analyses to obtain reliability-based values of F . For example, Dutch engineering practice calculates F for dykes by using the 5 percentile of either the underlying soil property distribution or a distribution which takes some account of spatial variability by using simplified variance reduction. Recently, Hicks *et al.* (2019) showed how RFEM can be used (with or without partial factors) to directly determine reliability-based factors of safety, without having to explicitly derive the characteristic values. Although this method is computationally intensive, it removes the need to determine X_k , is completely general, and automatically accounts for both variance reduction and the reduced mean due to weaker zones.

ANALYSIS OF DYKE CROSS-SECTION

Figure 2 shows the idealised dyke cross-section analysed by Hicks *et al.* (2019), which is the same as that used previously by Kames (2015) in limit equilibrium slope stability analyses based on 5-percentile characteristic values. Table 2 lists, for each soil layer, the mean, 5 percentile and coefficient of variation (COV) of the shear strength parameters (cohesion c' and tangent of friction angle ϕ'), which were assumed to follow log-normal distributions, as well as the unit weight γ , which was assumed to be deterministic (Kames, 2015). Hicks *et al.* (2019) also assumed the vertical and horizontal scales of fluctuation to be $\theta_v = 0.5$ m and $\theta_h = 6.0$ m, respectively, based on CPT data from a similar site (de Gast *et al.*, 2017).

Hicks *et al.* (2019) used RFEM with the strength reduction method to compute the probability distribution of possible values of F , given the soil parameter statistics listed in Table 2. From that distribution, the 5-percentile response corresponded to $F = 0.98$ (before application of partial factors). They also demonstrated, by way of a simple approach, that the 5-percentile system response implied X_k values corresponding to a single value of η of 34%.

5-Percentile design point

The 5-percentile design point is here defined as the most likely combination of parameters on the 'characteristic' surface (i.e. the 5-percentile system response surface, corresponding to $F = 0.98$). It was evaluated using the HLRF (Hasofer-Lind-Rackwitz-Fiessler) algorithm (Hasofer & Lind, 1974; Rackwitz & Fiessler, 1978), with the performance function $G = F - 0.98$ being evaluated by the finite-element method without accounting for spatial variability. Based on the location of the shear strain invariant contours observed in the previous RFEM analyses, six variables were considered in defining the 5-percentile design point – that is, two variables (c' and $\tan \phi'$) for soil

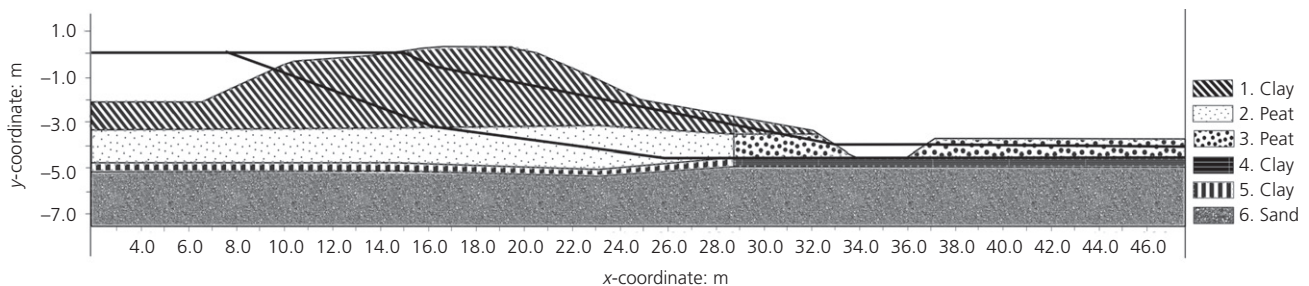
**Fig. 2.** Dyke cross-section showing soil layers and phreatic surfaces (represented by solid black lines): the top phreatic surface relates to layers 1–5 and the bottom phreatic surface relates to layer 6

Table 2. Unit weights and shear strength parameters for different layers of the dyke section

Layer	γ : kN/m ³	c'			$\tan \phi'$		
		Mean: kPa	5-percentile value: kPa	COV	Mean	5-percentile value	COV
1	13.9*	4.4	1.1	0.773	0.580	0.506	0.081
2	9.8	3.2	1.0	0.656	0.398	0.361	0.058
3	9.9	2.0	0.5	0.775	0.358	0.279	0.145
4	15.0	4.5	1.7	0.544	0.559	0.547	0.012
5	15.0	5.4	2.9	0.352	0.601	0.594	0.007
6	20.0	0.0	0.0	0.000	0.637	0.637	0.000

* $\gamma = 6.9$ kN/m³ above phreatic surface.

Table 3. Most likely combination of characteristic soil property values corresponding to 5-percentile system response ($F = 0.98$) of the dyke section, the respective percentiles of the underlying distributions (η) and the sensitivity indices of the variables

Layer	c'			$\tan \phi'$		
	5-percentile design point, X_k : kPa	η : %	Sensitivity index	5-percentile design point, X_k	η : %	Sensitivity index
1	2.688	35.27	0.27	0.577	49.70	0.00
2	1.863	27.27	0.58	0.396	46.98	0.01
3	1.285	38.11	0.14	0.354	49.70	0.00

layers 1, 2 and 3. The parameters of layers 4, 5 and 6 were found to have negligible influence on F .

Table 3 shows the most likely combination of characteristic values, as well as the corresponding η values and the sensitivity indices of the variables. The results imply that F is less sensitive to $\tan \phi'$ for all layers, with the characteristic values of $\tan \phi'$ corresponding to η values approaching 50%. Conversely, F is most sensitive to c' for the underlying peat layer (layer 2); the characteristic value of c' for this layer corresponds to $\eta = 27.27\%$.

Characteristic values for the dyke section computed using various analytical equations

The approaches described above and in Hicks *et al.* (2019) to back-calculate the characteristic values require a reliability-based F from a fully stochastic analysis – for example, using RFEM. However, several simpler (albeit more approximate) solutions exist. Hence, characteristic values for c' and $\tan \phi'$ for layers 1 to 3 of the dyke section have been calculated using the methods reviewed below, and, using the computed X_k values for these layers and mean values (X_m) for the other (not influential) layers, deterministic slope stability assessments have been carried out using finite elements with the strength reduction method.

Schneider (1997) equation. It was proposed by Schneider (1997) that:

$$X_k = X_m \times (1 - \text{COV} \times 0.5) \tag{1}$$

The resulting characteristic values, value of η and value of F are listed in Table 4. This shows that the X_k values are mostly underestimated relative to the 5-percentile design point values, especially for $\tan \phi'$, resulting in a slightly conservative value of F (i.e. relative to $F = 0.98$).

Schneider & Schneider (2012) equation. Equation (1) was extended by Schneider & Schneider (2012) to include variance reduction (Γ^2) (Vanmarcke, 1977) due to averaging of soil property values along the failure surface. The derivation was based on the total coefficient of variation

Table 4. Characteristic soil property values for the dyke section computed using equation (1) (Schneider, 1997), value of η and resulting value of F

Layer	c'		$\tan \phi'$		F
	X_k : kPa	η : %	X_k	η : %	
1	2.472	30.85	0.555	30.85	0.96
2	1.984	30.85	0.386	30.85	
3	1.122	30.85	0.329	30.85	

$\text{COV}_{\text{total}}$ (Phoon & Kulhawy, 1999):

$$\text{COV}_{\text{total}} = \sqrt{\Gamma^2 \times \text{COV}^2 + \text{COV}_m^2 + \text{COV}_t^2 + \text{COV}_s^2} \tag{2}$$

Assuming that the COVs due to measurement (m), transformation (t) and statistical (s) errors are negligible, so that $\text{COV}_{\text{total}} \approx \text{COV} \times \Gamma$, Schneider & Schneider (2012) proposed the following equations for X_k . When X is modelled as a normal distribution

$$X_k = X_m \times (1 - \text{COV} \times \Gamma \times 1.645) \tag{3}$$

whereas for a log-normal distribution of X

$$X_k = X_m \times \left(0.192 \sqrt{\ln(1+(\text{COV} \times \Gamma)^2)} / \sqrt{1 + (\text{COV} \times \Gamma)^2} \right) \tag{4}$$

where $\Gamma^2 = \Gamma_x^2 \times \Gamma_y^2 \times \Gamma_z^2$ and Γ_i^2 is the variance reduction due to the averaging of property values over the failure length l_i in the direction i , given by

$$\Gamma_i^2 = \left(\frac{\theta_i}{l_i} \times \left(1 - \frac{\theta_i}{3 \times l_i} \right) \right); \theta_i < l_i \tag{5}$$

$$\Gamma_i^2 = \left(1 - \frac{l_i}{3 \times \theta_i} \right); \theta_i \geq l_i$$

Equations (3) and (4) imply that X_k is the 5 percentile of a distribution with a COV that is reduced relative to the underlying distribution. Although this aspect is

similar to the concept of ‘effective’ property distribution described in section ‘Characteristic values and design according to EC7’, equations (3) and (4) do not consider the reduction in the mean of the distribution arising from the influence of weak zones. Moreover, they require the estimation of Γ_i^2 and thereby l_b , which may not be straightforward.

To calculate the variance reduction for the dyke section, a deterministic analysis based on mean soil properties was used to provide a representative failure mechanism (Fig. 3(a)). The length of the failure surface was calculated

based on the curve fitted through the failure points in Fig. 3(b). The estimated lengths of the horizontal and vertical components of the surface passing through each soil layer are given in Table 5, along with the respective values of Γ (equation (5)), the X_k values (equation (4)), and resulting value of F . The characteristic values and thereby η values are greatly underestimated for layer 3, resulting in a conservative estimate of F . Although it is unsurprising that a failure length smaller than θ , as in layer 3, would result in X_k tending towards the 5 percentile (as has been computed by equation (4)), the higher η values of the 5-percentile design point for layer 3 (Table 3) are due to the lower relative influence of layer 3 on the failure mechanism.

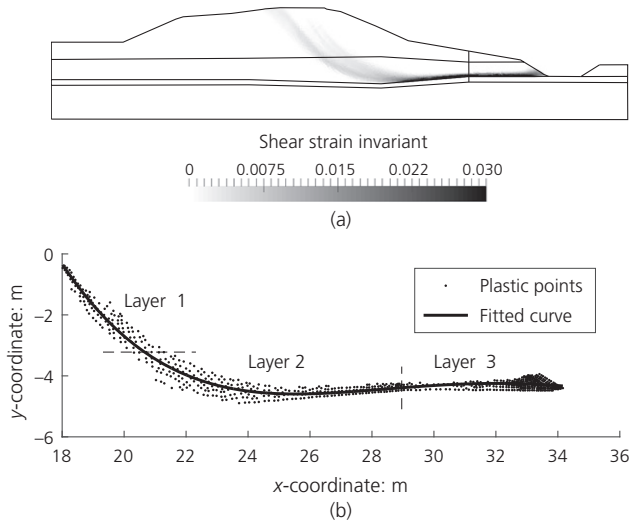


Fig. 3. Deterministic analysis of the dyke section based on mean soil property values: (a) shear strain invariant contours at slope failure; (b) failure surface fitted through plastic points in order to calculate variance reduction using equation (5)

Equation proposed by CEN. An evolution committee of CEN, the European Committee for Standardisation, which plans to publish a revised version of EC7, has proposed (Orr, 2017):

$$X_k = X_m - a \times (X_m - X_{extr}) \times \sqrt{\theta_v/l_v} \tag{6}$$

where X_{extr} is the expected extreme value, which Orr (2017) proposed to be at a distance of 3 standard deviations from the mean, l_v is the vertical component of the failure length and a is a factor accounting for the extent and quality of field and laboratory investigations and levels of expertise (with lower values of a corresponding to high-quality tests and reliable results).

Based on the values of a suggested by Orr (2017), the characteristic soil property values computed using equation (6) and resulting values of F are listed in Tables 6(a)–6(c). Note that, in using equation (6), an upper limit for θ_v/l_v of 1.0 has been implemented in order to avoid the possibility of $X_k < X_{extr}$. The table shows that the X_k values for $\tan \phi'$ are greatly underestimated (even though, as indicated by the 5-percentile design point, the dyke section is less sensitive to $\tan \phi'$). Conversely, the X_k values for c' for

Table 5. Characteristic soil property values for the dyke section computed using equation (4) (Schneider & Schneider, 2012), η values and resulting value of F

Layer	l_h : m	l_v : m	Γ	c'		$\tan \phi'$		F
				X_k : kPa	η : %	X_k	η : %	
1	3.1	2.7	0.380	2.627	34.04	0.551	27.66	0.89
2	8.3	1.0	0.478	1.842	26.63	0.380	22.16	
3	5.1	0.0	0.845	0.624	8.77	0.290	8.43	

Table 6. Characteristic soil property values for the dyke section computed using equation (6) (Orr, 2017), η values and resulting value of F , for different values of a : (a) $a = 0.5$; (b) $a = 0.75$; (c) $a = 1.0$

Layer	l_v : m	c'			$\tan \phi'$			F
		X_{extr} : kPa	X_k : kPa	η : %	X_{extr}	X_k	η : %	
(a)								
1	2.7	0.447	3.548	51.10	0.454	0.558	28.95	1.04
2	1.0	0.445	2.226	37.92	0.334	0.375	16.30	
3	0.0	0.202	1.101	29.89	0.230	0.294	9.76	
(b)								
1	2.7	0.447	3.122	43.67	0.454	0.539	19.40	0.89
2	1.0	0.445	1.739	23.56	0.334	0.364	6.54	
3	0.0	0.202	0.651	9.81	0.230	0.262	1.81	
(c)								
1	2.7	0.447	2.696	35.43	0.454	0.525	11.90	0.69
2	1.0	0.445	1.252	10.21	0.334	0.353	1.99	
3	0.0	0.202	0.202	0.13	0.230	0.230	0.13	

layer 1 are overestimated, due to a relatively smaller value of θ_v/l_v leading to greater spatial averaging. Table 6 shows that the X_k values are very sensitive to the value of a and F varies from moderately unconservative to extremely conservative, depending on a .

Effective random dimensions-quantile value method. A method to approximate the 5 percentile of the system response function (G) directly, through the reformulation of the characteristic values based on the concept of number of effective random dimensions (ERD) in a quantile value method (QVM), was recently proposed by Ching *et al.*

(2020). The method relies on the linearisation of G around the parameter means:

$$b_i = G(\mu_1, \dots, \mu_i + 0.5 \times \sigma_i, \dots, \mu_n) - G(\mu_1, \dots, \mu_i - 0.5 \times \sigma_i, \dots, \mu_n) \quad (7)$$

where b_i is the coefficient of variable X_i in the linearised G and μ_i and σ_i are the mean and standard deviation of X_i .

For uncorrelated variables, ERD is then calculated as

$$ERD = \frac{(|b_1| + |b_2| + \dots + |b_n|)^2}{\sum_i b_i^2} \quad (8)$$

Table 7. Characteristic soil property values for the dyke section computed using ERD-QVM- Γ , η values and resulting value of F

Layer	c'			$\tan \phi'$			F
	b	X_k : kPa	η : %	b	X_k	η : %	
1	0.064	2.728	36.1	0.002	0.562	36.1	0.96
2	0.136	2.046	32.7	0.010	0.387	32.7	
3	0.097	0.918	21.4	0.005	0.316	21.4	

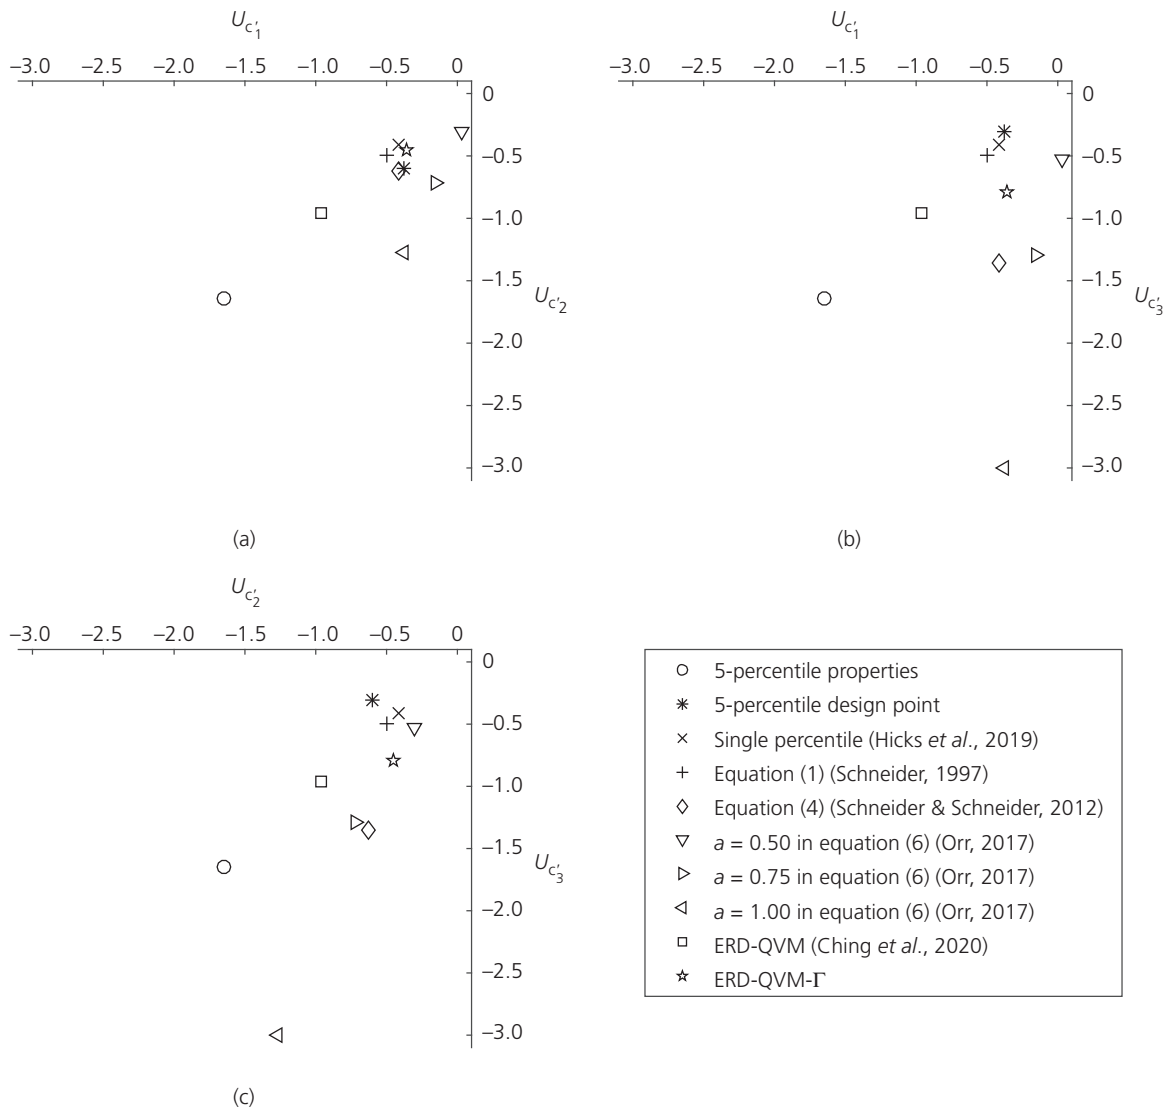


Fig. 4. Characteristic values in standard normal space of c'_1 , c'_2 and c'_3 for layers 1, 2 and 3, respectively, computed using various methods: (a) layers 1 and 2; (b) layers 1 and 3; (c) layers 2 and 3

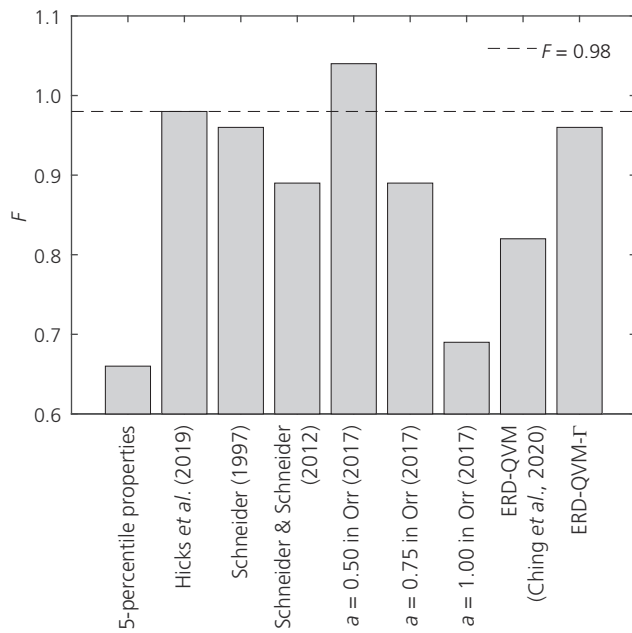


Fig. 5. Comparison of factors of safety obtained by the various methods with $F = 0.98$ (corresponding to the 5-percentile system response based on RFEM)

The required η that achieves the target exceedance probability of 5% is then

$$\eta = \Phi\left(\frac{\Phi^{-1}(0.05)}{\sqrt{\text{ERD}}}\right) \times 100\% \quad (9)$$

where Φ is the standard normal cumulative distribution function.

Applying this method to the six variables gives $\text{ERD} = 2.93$, $\eta = 17\%$ and thereby $F = 0.82$. Due to the need for linearisation against all variables, the method does not allow the direct inclusion of spatial variability.

Effective random dimensions-quantile value method-Γ (proposed in this study). By combining the ERD-QVM with the method in section ‘Schneider & Schneider (2012) equation’ to account for spatial variability, equations (7) and (9) can be modified to:

$$b_i = G(\mu_1, \dots, \mu_i + 0.5 \times \sigma_i \times \Gamma_i, \dots, \mu_n) - G(\mu_1, \dots, \mu_i - 0.5 \times \sigma_i \times \Gamma_i, \dots, \mu_n) \quad (10)$$

$$\eta_i = \Phi\left(\frac{\Phi^{-1}(0.05)}{\sqrt{\text{ERD}}}\right) \times \Gamma_i \times 100\% \quad (11)$$

where Γ_i^2 is the variance reduction for X_i .

Applying this method to the six variables and using Γ_i from Table 5 gives $\text{ERD} = 3.08$, and thereby the η values listed in Table 7 and $F = 0.96$.

Comparison of methods

Figure 4 illustrates, in standard normal space, the characteristic values of c' computed for layers 1 to 3 using the different methods. The values corresponding to the RFEM-based simple approach in Hicks *et al.* (2019) and the 5-percentile design point lie on the characteristic surface of points resulting in $F = 0.98$. Figure 5 shows that the value computed using $a = 0.50$ in equation (6) lies on the unconservative side ($F > 0.98$) of the characteristic surface,

whereas the values computed using other simplified methods are on the conservative side ($F < 0.98$). Although there are other variables that define the characteristic surface (i.e. $\tan \phi'$ for layers 1 to 3), these have not been illustrated in Fig. 4 for reasons of clarity.

CONCLUSIONS

Figure 5 compares the factors of safety obtained by the finite-element method using the characteristic soil properties obtained by the various simplified methods, and compares them with $F = 0.98$ obtained using RFEM (corresponding to the 5-percentile system response). Aside from the over-conservative values of F computed using 5-percentile property values, ERD-QVM and equation (6) when based on unreliable data, all other methods give values of F within 10% of the benchmark solution (both conservative and unconservative). In this study, Schneider (1997) equation and ERD-QVM-Γ give the best approximations, although which method is the best will be problem-dependent. The more rigorous approach reported by Hicks *et al.* (2019) is computationally intensive; however, it by-passes the need to explicitly determine characteristic values, is completely general and can lead to economy of design, so it may be prudent to use such an approach in larger projects.

ACKNOWLEDGEMENTS

This work is part of the research programme Reliable Dykes with project number 13864, financed by the Netherlands Organisation for Scientific Research (NWO).

REFERENCES

- CEN (European Committee for Standardisation) (2004). Eurocode 7: Geotechnical design. Part 1: General rules, EN 1997-1. European Committee for Standardisation, Brussels, Belgium.
- Ching, J. & Phoon, K. K. (2013). Probability distribution for mobilised shear strengths of spatially variable soils under uniform stress state. *Georisk: Assess. Manage. Risk Engng Systems Geohaz.* 7, No. 3, 209–224.
- Ching, J., Phoon, K. K., Chen, K. F., Orr, T. L. L. & Schneider, H. R. (2020). Statistical determination of multivariate characteristic values for Eurocode 7. *Struct. Saf.* 82, 101893.
- de Gast, T., Vardon, P. J. & Hicks, M. A. (2017). Estimating spatial correlations under man-made structures on soft soils. In *Proceedings of Geo-Risk 2017: Impact of Spatial Variability, Probabilistic Site Characterization, and Geohazards (GSP284)* (eds J. Huang, G. A. Fenton, L. Zhang and D. V. Griffiths), pp. 382–389. Denver, CO, USA: ASCE.
- Fenton, G. A. & Griffiths, D. V. (2008). *Risk assessment in geotechnical engineering*. New York, NY, USA: John Wiley & Sons.
- Griffiths, D. V., Huang, J. & Fenton, G. A. (2009). Influence of spatial variability on slope reliability using 2-D random fields. *J. Geotech. Geoenviron. Engng* 135, No. 10, 1367–1378.
- Hasofer, A. M. & Lind, N. C. (1974). Exact and invariant second-moment code format. *J. Engng Mech. Div.* 100, No. 1, 111–121.
- Hicks, M. A. (2012). An explanation of characteristic values of soil properties in Eurocode 7. In *Modern geotechnical design codes of practice: development, calibration and experiences* (eds P. Arnold, G. A. Fenton, M. A. Hicks, T. Schweckendiek and B. Simpson), pp. 36–45. Amsterdam, the Netherlands: IOS Press.
- Hicks, M. A. & Nuttall, J. D. (2012). Influence of soil heterogeneity on geotechnical performance and uncertainty: a stochastic view on EC7. In *Proceedings of 10th international probabilistic workshop* (eds C. Moormann, M. Huber and D. Proske), pp. 215–227. Stuttgart, Germany: Universität Stuttgart.
- Hicks, M. A. & Samy, K. (2002). Reliability-based characteristic values: a stochastic approach to Eurocode 7. *Ground Engng* 35, No. 12, 30–34.

- Hicks, M. A. & Spencer, W. A. (2010). Influence of heterogeneity on the reliability and failure of a long 3D slope. *Comput. Geotech.* **37**, No. 7–8, 948–955.
- Hicks, M. A., Varkey, D., van den Eijnden, A. P., de Gast, T. & Vardon, P. J. (2019). On characteristic values and the reliability-based assessment of dykes. *Georisk: Assess. Manage. Risk Engnd Systems Geohaz.* **13**, No. 4, 313–319.
- Kames, J. (2015). *Veiligheidsstoets Boezemkaden*, Technical Report 14.0046944. Heerhugowaard, the Netherlands: Hollands Noorderkwartier (in Dutch).
- Orr, T. L. L. (2017). Defining and selecting characteristic values of geotechnical parameters for designs to Eurocode 7. *Georisk: Assess. Manage. Risk Engnd Systems Geohaz.* **11**, No. 1, 103–115.
- Phoon, K. K. & Kulhawy, F. H. (1999). Characterization of geotechnical variability. *Can. Geotech. J.* **36**, No. 4, 612–624.
- Rackwitz, R. & Fiessler, B. (1978). Structural reliability under combined random load sequences. *Comput. Struct.* **9**, No. 5, 489–494.
- Schneider, H. R. (1997). Definition and characterization of soil properties. In *Proceedings of 14th international conference on soil mechanics and geotechnical engineering*, Hamburg, Germany, pp. 273–281. Rotterdam, the Netherlands: Balkema.
- Schneider, H. R. & Schneider, M. A. (2012). Dealing with uncertainties in EC7 with emphasis on determination of characteristic soil properties. In *Modern geotechnical design codes of practice: development, calibration and experiences* (eds P. Arnold, G. A. Fenton, M. A. Hicks, T. Schweckendiek and B. Simpson), pp. 87–101. Amsterdam, the Netherlands: IOS Press.
- Shen, M., Khoshnevisan, S., Tan, X., Zhang, Y. & Juang, C. H. (2019). Assessing characteristic value selection methods for design with LRFD – a design robustness perspective. *Can. Geotech. J.* **56**, No. 10, 1475–1485.
- Vanmarcke, E. H. (1977). Reliability of earth slopes. *J. Geotech. Engng Div., ASCE* **103**, No. 11, 1247–1265.

HOW CAN YOU CONTRIBUTE?

To discuss this paper, please submit up to 500 words to the editor at journals@ice.org.uk. Your contribution will be forwarded to the author(s) for a reply and, if considered appropriate by the editorial board, it will be published as a discussion in a future issue of the journal.