

Relative Affine Localization for Robust Distributed Formation Control

Li, Z.; Rajan, R.T.

Publication date
2022

Document Version
Final published version

Published in
42nd WIC Symposium on Information Theory and Signal Processing in the Benelux (SITB 2022)

Citation (APA)

Li, Z., & Rajan, R. T. (2022). Relative Affine Localization for Robust Distributed Formation Control. In J. Louveaux, & F. Quitin (Eds.), *42nd WIC Symposium on Information Theory and Signal Processing in the Benelux (SITB 2022)* (pp. 64-65)

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Relative Affine Localization for Robust Distributed Formation Control

Zhonggang Li
Faculty of EEMCS
Delft University of Technology
Delft, The Netherlands
z.li-56@student.tudelft.nl

Raj Thilak Rajan
Faculty of EEMCS
Delft University of Technology
Delft, The Netherlands
r.t.rajan@tudelft.nl

Abstract—Multiagent systems have been widely researched and deployed in the industry for their potential to collectively achieve goals by distributing tasks to individual agents [1]–[4]. Formation control, one of the many applications of multiagent systems, aims at steering agents into a stable geometric pattern in space [3], [4]. There has been a variety of crafted distributed controllers in literature based on different dynamics that agents follow, and different variables that agents sense and control [5]. Affine formation control is brought to the spotlight where N agents in $\mathbb{R}^D$ converge to the target formation up to an affine transformation [6]. A more general scenario of affine formation control is the dynamic formation maneuvering problem where the target configuration is time-varying and the agents need to not only converge to the desired formation but also track the maneuvering pattern. This problem is addressed in [7] where a series of controller designs are introduced depending on the dynamics of the agents.

One of the practical challenge for affine formation control is the awareness of relative positions of the neighbouring nodes, which may not be always available due to e.g. sensor malfunctioning and environmental interference. Missing relative positions entail an adverse impact on the control, which leads to a suboptimal or even unstable formation. In this work, we present relative affine localization (RAL) to estimate unavailable relative positions from the known ones in dynamic affine formation control settings. It is found that the global affine transformation parameters over the network can be locally estimated through a set of linear equations. As such, the missing relative positions of the neighboring agents can also be localized and then employed by the controller. We also conclude that in $\mathbb{R}^D$, D relative positions for each agent are sufficient for localization in general. Furthermore, a sequential Least Squares (SLS)-based adaptive filter across time is also implemented on top of RAL to track the underlying affine parameters and improve the performance. Fig. 1 shows the improvements in tracking error $\delta(t)$ when using RAL and SLS-based filtering. We also study two practical scenarios where the system is subject to a percentage of loss of relative positions and out-of-service agents, respectively. As a result, RAL is robust to these cases in terms of convergence and optimality. It is worth mentioning that this method applies to all the controllers introduced in [7] since they involve relative positions.

Index Terms—affine formation control, missing observations, sequential Least Squares

This work is partially funded by the European Leadership Joint Undertaking (ECSEL JU), under grant agreement No 876019, the ADACORSA project - "Airborne Data Collection on Resilient System Architectures."

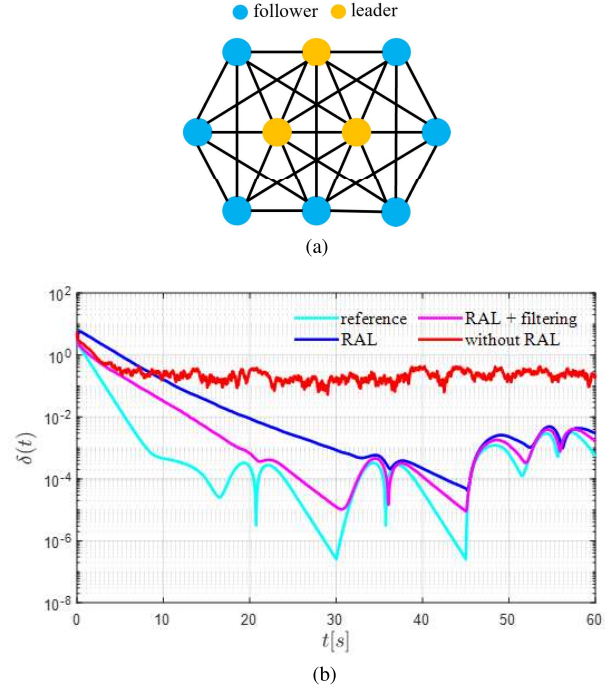


Fig. 1. (a) is the graph representation of formation where the vertices denote mobile agents and edges denote relative measurements. The time-varying target formation will be an affine transformation of the spatial locations of the vertices. (b) shows the mean tracking error $\delta(t)$ (difference of actual and target positions) across time t in seconds when only 3 relative positions are available per agent. The “reference” case is when all relative positions are available. This figure shows that without RAL the formation only converges suboptimally, but with RAL and SLS-based filtering the performance is much improved.

REFERENCES

- [1] S. Zhang, J. Zhou, D. Tian, Z. Sheng, X. Duan and V. C. M. Leung, “Robust Cooperative Communication Optimization for Multi-UAV-Aided Vehicular Networks,” in *IEEE Wireless Communications Letters*, vol. 10, no. 4, pp. 780–784, April 2021, doi: 10.1109/LWC.2020.3043365.
- [2] R. T. Rajan, et al., “Applications and Potentials of Intelligent Swarms for magnetospheric studies,” in *Acta Astronautica*, Vol. 193, pp. 554–571, 2022, doi: 10.1016/j.actaastro.2021.07.046.
- [3] H. Li, P. Xie and W. Yan, “Receding Horizon Formation Tracking Control of Constrained Underactuated Autonomous Underwater Vehicles,” in *IEEE Transactions on Industrial Electronics*, vol. 64, no. 6, pp. 5004–5013, June 2017, doi: 10.1109/TIE.2016.2589921.

- [4] J. Alonso-Mora, S. Baker and D. Rus. "Multi-robot formation control and object transport in dynamic environments via constrained optimization," in *The International Journal of Robotics Research*, vol. 36, no. 9, pp. 1000-1021, 2017, doi: 10.1177/0278364917719333.
- [5] K. K. Oh, M. C. Park and H. S. Ahn, "A survey of multi-agent formation control," in *Automatica*, Vol. 53, pp. 424-440, 2015, doi: 10.1016/j.automatica.2014.10.022.
- [6] Z. Lin, L. Wang, Z. Chen, M. Fu and Z. Han, "Necessary and Sufficient Graphical Conditions for Affine Formation Control," in *IEEE Transactions on Automatic Control*, vol. 61, no. 10, pp. 2877-2891, Oct. 2016, doi: 10.1109/TAC.2015.2504265.
- [7] S. Zhao, "Affine Formation Maneuver Control of Multiagent Systems," in *IEEE Transactions on Automatic Control*, vol. 63, no. 12, pp. 4140-4155, Dec. 2018, doi: 10.1109/TAC.2018.2798805.