

## Maximizing Water--Food--Energy Nexus Synergies at Basin Scale

Burger, Rogier; Abraham, Edo

**DOI**

[10.1007/978-3-030-13068-8\\_16](https://doi.org/10.1007/978-3-030-13068-8_16)

**Publication date**

2019

**Document Version**

Accepted author manuscript

**Published in**

Frontiers in Water-Energy-Nexus—Nature-Based Solutions, Advanced Technologies and Best Practices for Environmental Sustainability

**Citation (APA)**

Burger, R., & Abraham, E. (2019). Maximizing Water--Food--Energy Nexus Synergies at Basin Scale. In V. Naddeo, M. Balakrishnan, & K. H. Choo (Eds.), *Frontiers in Water-Energy-Nexus—Nature-Based Solutions, Advanced Technologies and Best Practices for Environmental Sustainability* (pp. 67-70). (Advances in Science, Technology & Innovation (ASTI)). Springer. [https://doi.org/10.1007/978-3-030-13068-8\\_16](https://doi.org/10.1007/978-3-030-13068-8_16)

**Important note**

To cite this publication, please use the final published version (if applicable).  
Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.  
We will remove access to the work immediately and investigate your claim.

## Maximizing Water-Food-Energy Nexus synergies at Basin Scale

Rogier E.A. Burger<sup>1</sup>, Edo Abraham<sup>2</sup>

<sup>1</sup> Faculty of Civil Engineering and Geosciences Delft Univ. of Technology, Stevinweg 1, 2628 CN, Delft, Netherlands, [rogier.burger@gmail.com](mailto:rogier.burger@gmail.com)

<sup>2</sup> Faculty of Civil Engineering and Geosciences, Delft Univ. of Technology, Stevinweg 1, 2628 CN, Delft, Netherlands, [e.abraham@tudelft.nl](mailto:e.abraham@tudelft.nl)

**Highlights:** *In this short paper, we show how an integrated nexus framework ('MAXUS') can be used to optimise and visualize resources for a case study in Burkina Faso and Ghana, with a special focus on the integration of nexus interactions for infrastructure planning. We show how, for example, investing in the electricity grid in the south may lead to increased food security in the north. MAXUS was built to understand, simulate and optimize intersectoral development strategies in the water, food and energy sectors. We believe this new type of geospatial integral resource management, supported by the exponential increase of data availability of the twenty-first century, could finally turn nexus models into decision support tools.*

**Keywords:** Nexus optimization framework, bottom-up approach, integrated resource management, remote sensing

### 1. Introduction

Population growth, meat-focused diets and emerging industries are increasing stress on water, energy and food (hereafter: WEF) supply around the globe. As stress on the resources rises, the interdependencies between the sectors become more apparent and often lead to unforeseen chain reactions. An example of which is: a drought leads to disappointing hydropower generation that leave groundwater pumps inoperable, which in turn leads to disappointing harvests<sup>[1]</sup>.

Because of these and many non-trivial/hidden interdependencies, synergizing water, food, and energy policy is no easy task. Millions are spent to build reservoirs, food storage facilities, roads, canals, irrigated fields, electricity grids, energy production facilities etc. These infrastructures are key to improve WEF security around the globe. With the strong connection of the WEF resources, infrastructure built in one sector impacts the others. With an unclear idea of this impact, newly built infrastructure may turn out to be ineffective and sometimes even harmful to other sectors. Especially, when infrastructure of multiple sectors is developed in parallel, it is difficult to have a good understanding of the final outcome without an integrated analysis.

The need to obtain a integrated framework for policies and infrastructure design is now globally advocated<sup>[2,3,4,5]</sup>. As a result, several Nexus models were developed but left a lot to be desired according to critics. The main critique of these models so far has been that many cannot serve as a decision support tool because they lack the ability to investigate specific governance actions or the implementation of technical interventions. These models generally have intensive data requirements and not flexible enough to perform for Nexus studies at different scales with the same model framework<sup>[6,7,8]</sup>.

In this paper we propose a new optimization model framework for nexus studies titled 'MAXUS'<sup>[9]</sup>. It was built to fill the gap where current models fall short. It was built to customize a model for a specific Nexus study. To test the methodology of MAXUS it was applied to a case study for Ghana and Burkina Faso. Allocation of water and land resources for the final supply of WEF was optimized over space and time, for the objective and constraints given.

### 2. Material and Methods

Considering the wide range of nexus issues, which may have different scales in space and time and have different data availability, flexibility of a nexus model framework is indispensable. The challenge with nexus issues is succinctly captured by Bazilian et al.: "to draw system boundaries wide enough to encompass the enormity of the interacting vectors, while maintaining it small enough to be able to conduct useful analysis"<sup>[6, p.5]</sup>


To make sure that important interactions are captured for the nexus study at stake, a systematic methodology is required. In MAXUS we used a bottom up approach to define the objective, balances, interactions, constraints, dimensions and decision variables for a given Nexus study.

A case study was developed for Burkina Faso and Ghana in which the approach was applied. Economic cost minimization was set as an objective while satisfying given water, food and energy demands of both countries. First, the nexus optimization was performed to explore the benefits of a multipurpose dam proposed in Ghana, then, to explore possible locations for additional irrigation and reservoir capacity. Both these cases highlight how a nexus analysis can be used for infrastructure development.

### 3. Results and Discussion


In Ghana, plans have been made for the construction of a multipurpose dam, near Pwalagu<sup>[10]</sup>, of which the location is shown by the red arrow. It is to serve for hydropower, as well as irrigation. To investigate the benefits of such construction, the proposed extra water storage and irrigation capacities is added (by changing constraints) to the region in the MAXUS model. An optimization is solved for this new infrastructure. In this optimization, the water, food and energy demand is to be satisfied under minimal costs. Decision variables are food production, transport and storage, import and export; water transport, storage and irrigation; electricity transport, import and thermal power production.

In the figure below, we show how the new dam is used to store water coming from the northern regions in the wet season and to discharge in the dry season. Part of the discharged water is used for irrigation in the region itself. With land being cropped, water is also being evaporated. Because of a significant change in crop evaporation, the total hydropower production has decreased, even though additional hydropower capacity was installed. Still, which is remarkable, less thermal power was required to be generated. Because of the relocation of hydropower generation, from south to north, transmission losses could be reduced, and consequently, more net energy is left. The power now produced is closer to the demand.

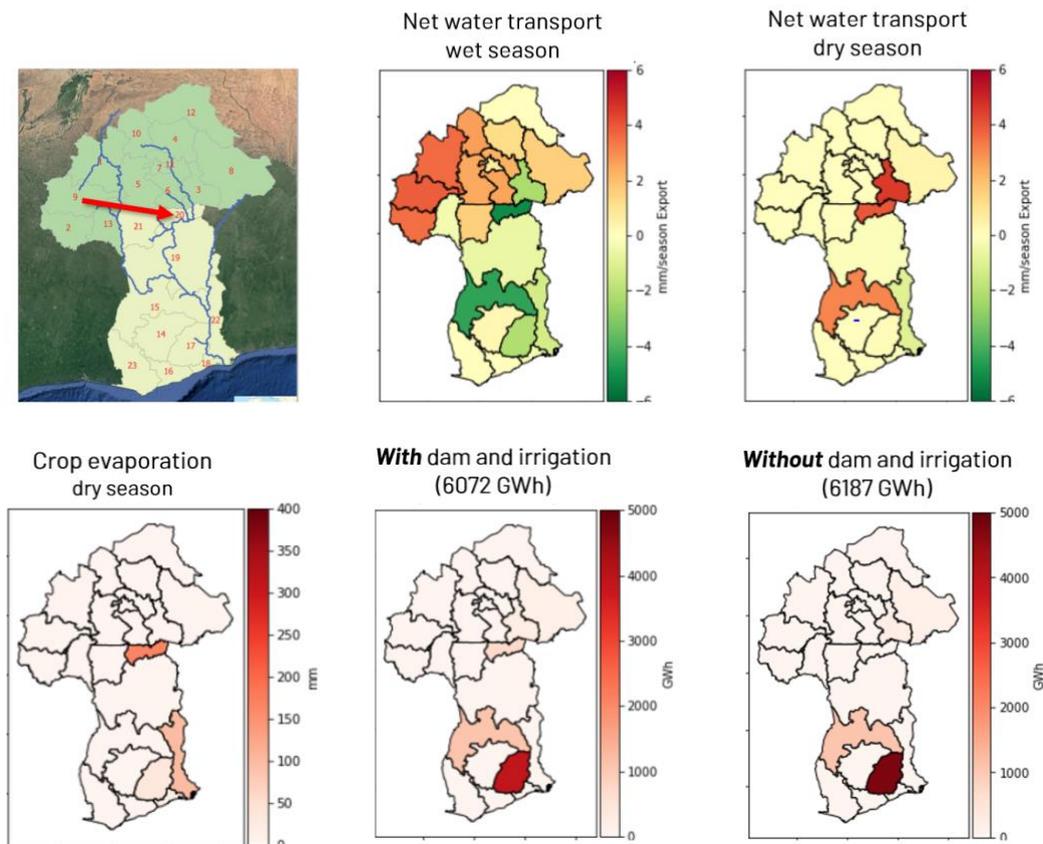

If the impact of infrastructure expansion can be determined for the optimization by the model, a new question arises: where (and when) is infrastructure worth the investment? To answer that, a new strategy is adopted. By making infrastructure expansion part of the optimization problem, MAXUS determines where infrastructure is beneficial against a certain cost.

The results show that two regions become for the larger part equipped with irrigation capacity. The region of the capital of Ghana and the region for which new plans are proposed. This is no coincidence. Both regions are just downstream of a hydropower dam and therefore water storage. In the capital region, water has benefitted from all possible hydropower production before it is used for irrigation purposes and in addition is close to a large centre of food consumption - the capital Accra. The region where the dam is proposed is home to a large river junction, located relatively close to Ouagadougou the capital of Burkina Faso, another node of large demand. This region becomes key in supplying the north. Storage is built mostly in the northern areas. Here, there is relatively little storage capacity and building it provides essential water resources for irrigation. Besides storing water here means that it can always be used for hydropower on a later stage. IWMI<sup>[11]</sup> reports that this is actually also the place where a large number of reservoirs have been constructed in the last decades.

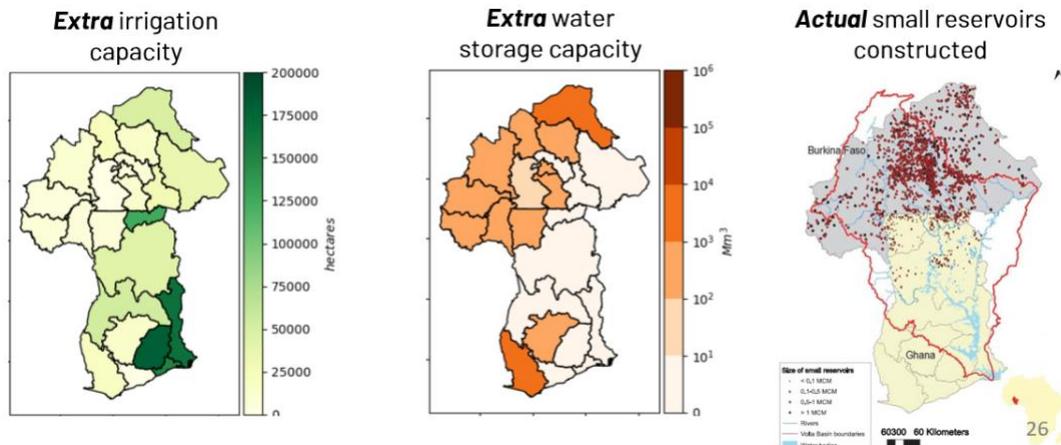

#### 4. Conclusion

We have shown that MAXUS can be used to find non-trivial, multisectoral, complex spatial and temporal trade-offs and synergies for operational management and infrastructural planning. It can be customized to a wide range of nexus studies; allowing adaptation objective functions, balances, decision variables, constraints and dimensions. It is scalable in time and space and therefore also has a flexible data input structure as to respond to different data availabilities world wide. With the potential growth of geospatial and material flow data availability in the coming years, with the aid of remote sensing and new data management tools like blockchain<sup>[12]</sup>, we believe that integrated nexus optimisation models could be the foundation to provide decision support at basin/country level.

#### 5. References

- [1] CERC, "Report On The Grid Disturbance On 30 Th July And Grid Disturbance On 31 St July," no. 167, 2012.
- [2] Asian Development Bank, Thinking about Water Differently: Managing the Water–Food–Energy Nexus, 2013.
- [3] FAO, Walking the Nexus Talk: Assessing the Water-Energy-Food Nexus in the Context of the Sustainable Energy for All Initiative, 2014.
- [4] H. Hoff, "Understanding the Nexus. Background Paper for the Bonn2011. Conference: The Water, Energy and Food Security Nexus.," Stockholm, 2011.
- [5] UN, The United Nations World Water Development Report 2014: Water and Energy, vol. 1.
- [6] M. Bazilian et al., "Considering the energy, water and food nexus: Towards an integrated modelling approach," Energy Policy, vol. 39, no. 12, pp. 7896–7906, 2011.
- [7] S. Kaddoura, S. El Khatib, "Review of water-energy-food Nexus tools to improve the Nexus modelling approach for integrated policy making," Environmental Science and Policy. Elsevier Ltd, 2017.
- [8] J. Dai et al., "Water-energy nexus: A review of methods and tools for macro-assessment," Appl. Energy, vol. 210, pp. 393–408, Jan. 2018.
- [9] R. E. A. Burger, "MAXUS: Synergizing water, food and energy policy", TU Delft Repository, 2018
- [10] Volta River Authority, "Pwalugu Multipurpose Dam Environmental and Social Impact Assessment," Jun. 2014.
- [11] IMWI, Revisiting dominant notions: A review of costs, performance and institutions of small reservoirs in sub-Saharan Africa, 2012.
- [12] N. Kshetri, "Will blockchain emerge as a tool to break the poverty chain in the Global South?." Third World Quarterly 38, no. 8: 1710-1732, 2017